

ASME/ISA/IEC VALVE SIZING

Part number of complete catalog with binder: D103183X012

Part number of complete catalog without binder: D103182X012

SECTION 1 FLOW COEFFICIENTS (ASME/ISA/IEC)

Valve	Style	Page
Typical F_d Valve Style Modifier Values		1-1/1-2
461	Angle	461-1
8532	Butterfly	8532-1
8560	Butterfly	8560-1
8580	Butterfly	8580-1
9500	Butterfly	9500-1
24000SB	Baumann™	24000SB-1
24000SVF	Baumann	24000SVF-1
26000	Baumann	26000-1
51000	Baumann	51000-1
83000	Baumann	83000-1
84000	Baumann	84000-1
87000	Baumann	87000-1
89000	Baumann	89000-1
A11	Butterfly	A11-1
A31A	Butterfly	A31A-1
A31A-Cryogenic	Butterfly	A31A-Cryogenic-1
A31D	Butterfly	A31D-1
A41	Butterfly	A41-1
A81	Butterfly	A81-1
Three Way Butterfly		Three Way Butterfly-1
CAV4	Globe, Offset Globe, and Angle	CAV4-1

Valve	Style	Page
Control-Disk™	Butterfly	Control-Disk-1
CV500	Ball	CV500-1
D	Globe	D-1
DA	Angle	DA-1
D3	Globe	D3-1
D4	Globe	D4-1
EAD	Angle	EAD-1
EAS	Angle	EAS-1
EAT	Angle	EAT-1/EAT-2
ED	Globe	ED-1
Large ED	Globe	ED-9
EDR	Globe	EDR-1/EDR-2
EH	Globe	EH-1
ES	Globe	ES-1
ET	Globe	ET-1
Large ET	Globe	ET-3
ET-C	Globe	ET-2
ETR	Globe	ET-3/ET-4
EU	Globe	EU-1
EWD	Globe	EW-1
EWD-1	Globe	EW-5
EWT-2	Globe	EW-7
EWS	Globe	EW-26
EWT	Globe	EW-31
EWT-C	Globe	EW-33
EWT-1	Globe	EW-34
EWND-1	Globe	EWN-2



Valve	Style	Page
EWND & EWNT	Globe	EWN-1
EWNS	Globe	EWN-3
EWNT-1 & EWNT-2	Globe	EWN-4
EZ	Globe	EZ-1
EZ-C	Globe	EZ-6
FBD and FBT	Globe	FB-1
GX	Globe	GX-1
GX 3-Way	3-Way	GX 3-Way-1
HPAT	Angle	HP-1
HPAS	Angle	HP-3
HPD	Globe	HP-11
HPS	Globe	HP-13
HPT	Globe	HP-17
NotchFlo™	Globe and Angle	NotchFlo-DST-1
POSI-SEAL™ Package	Butterfly	PSP-1
RSS	Globe	RSS-1
TBX	Globe	TBX-1
Vee-Ball™	Ball	V150-1
V150E	Ball	V150E-1
V150S	Ball	V150S-1
V200	Ball	V200-1/V200-2
V250	Ball	V250-1/V250-2
V260A	Ball	V260-1
V260B	Ball	V260-3
V260C	Ball	V260-4
V300	Ball	V300-1/V300-2
V500	Ball	V500-1
YD	3-Way	YD-1
YS	3-Way	YS-1

Subject	Page
---------	------

SECTION 2 VALVE SIZING PROCEDURE

Introduction	2-1
Sizing Valves for Liquids	2-1
Liquid Sizing Sample Problems	2-8
Sizing Valves for Compressible Fluids	2-12
Compressible Fluid Sizing Sample Problems	2-14
FSP Vapor Pressure Calculation (V1.4)	2-17
Custom P _v Coefficient Request	2-18
FSP Pulp Stock Sizing Calculations (v1.4)	2-19
Technical Information	2-23
Leakage Specifications	2-27
Valve Sizing for Cavitating and Flashing Liquids	2-28
Valve Sizing for Liquid-Gas Mixture	2-29
Saturated Steam Pressure and Temperature	2-32
Saturated and Superheated Steam Density/Temperature Curve	2-34
Velocity Equations	2-35

SECTION 3 NOISE ABATEMENT

Hydrodynamic Noise (ΔSPL_{Ar} Corrections)	3-1
Sound Characteristics	3-2
Hydrodynamic Noise	3-5

Typical F_d Valve Style Modifier Values

(From IEC534)

Table 1. Typical Values of Valve Style Modifier F_d (Full Size Trim)

VALVE TYPE	FLOW DIRECTION	RELATIVE FLOW COEFFICIENT Φ					
		0.10	0.20	0.40	0.60	0.80	1.00
Globe, parabolic plug	To open	0.10	0.15	0.25	0.31	0.39	0.46
	To close	0.20	0.30	0.50	0.60	0.80	1.00
Globe, 3 V-port plug	Either ⁽¹⁾	0.29	0.40	0.42	0.43	0.45	0.48
Globe, 4 V-port plug	Either ⁽¹⁾	0.25	0.35	0.36	0.37	0.39	0.41
Globe, 6 V-port plug	Either ⁽¹⁾	0.17	0.23	0.24	0.26	0.28	0.30
Globe, 60 equal diameter hole drilled cage	Either ⁽¹⁾	0.40	0.29	0.20	0.17	0.14	0.13
Globe, 120 equal diameter hole drilled cage	Either ⁽¹⁾	0.29	0.20	0.14	0.12	0.10	0.09
Butterfly, swing-through (centered shaft), to 70°	Either	0.26	0.34	0.42	0.50	0.53	0.57
Butterfly, fluted vane, to 70°	Either	0.08	0.10	0.15	0.20	0.24	0.30
60° flat disk	Either						0.50
Eccentric rotary plug	Either	0.12	0.18	0.22	0.30	0.36	0.42
Segmented ball	Either	0.60	0.65	0.70	0.75	0.78	0.80
Note: These values are typical only; actual values shall be stated by manufacturer. 1. Limited P1 – P2 in flow to close direction.							

Design 461 - Flow Down

Valve Size, Inches	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
2 x 3	1/2 ⁽²⁾	12.7	3/4	19	C _V	0.597	0.982	1.38	1.87	2.54	3.45	4.91	7.22	9.95	11.7	0.49
					K _V	0.516	0.849	1.19	1.62	2.20	2.98	4.25	6.25	8.61	10.1	---
					X _T	0.301	0.205	0.186	0.198	0.206	0.212	0.196	0.159	0.160	0.187	---
	3/4 ⁽²⁾	19.1	3/4	19	C _V	0.991	1.55	2.21	3.10	4.17	5.99	9.09	13.3	19.6	25.4	0.41
					K _V	0.857	1.34	1.91	2.68	3.61	5.18	7.86	11.5	17.0	22.0	---
					X _T	0.188	0.147	0.144	0.170	0.178	0.188	0.175	0.174	0.154	0.154	---
	1 ⁽²⁾	25.4	3/4	19	C _V	1.69	2.30	2.94	3.52	4.97	7.58	12.2	18.6	29.8	41.1	0.42
					K _V	1.46	1.99	2.54	3.05	4.30	6.56	10.6	16.1	25.8	35.6	---
					X _T	0.176	0.182	0.234	0.348	0.370	0.341	0.280	0.249	0.160	0.156	---
	1-1/4 ⁽²⁾	31.8	1-1/8	29	C _V	2.58	3.93	5.69	8.16	11.9	17.8	26.6	39.6	56.2	74.9	0.42
					K _V	2.23	3.40	4.92	7.06	10.3	15.4	23.0	34.3	48.6	64.8	---
					X _T	0.154	0.138	0.138	0.137	0.137	0.136	0.137	0.137	0.137	0.137	---
	1-1/2 ⁽³⁾	38.1	1-1/8	29	C _V	5.20	9.00	15.2	24.3	35.2	48.8	64.5	81.2	94.1	100	0.50
					K _V	4.50	7.79	13.1	21.0	30.4	42.2	55.8	70.2	81.4	86.5	---
					X _T	0.124	0.156	0.168	0.155	0.153	0.151	0.150	0.158	0.176	0.189	---
	1-5/8 ⁽³⁾	41.3	1-1/8	29	C _V	4.66	10.6	17.4	26.6	41.2	58.3	75.0	89.6	99.4	106	0.57
					K _V	4.03	9.17	15.1	23.0	35.6	50.4	64.9	77.5	86.0	91.7	---
					X _T	0.234	0.225	0.220	0.217	0.178	0.158	0.163	0.178	0.209	0.233	---
3 x 4	1 ⁽²⁾	25.4	3/4	19	C _V	1.58	2.40	3.25	4.02	5.92	9.04	14.2	22.5	35.7	45.2	0.42
					K _V	1.37	2.08	2.81	3.48	5.12	7.82	12.3	19.5	30.9	39.1	---
					X _T	0.324	0.315	0.372	0.503	0.434	0.357	0.290	0.218	0.150	0.135	---
	1-1/4 ⁽²⁾	31.8	1-1/8	29	C _V	2.38	3.97	6.03	8.02	9.05	12.7	20.0	36.9	61.9	79.4	0.42
					K _V	2.06	3.43	5.22	6.94	7.83	11.0	17.3	31.9	53.5	68.7	---
					X _T	0.274	0.198	0.182	0.213	0.324	0.333	0.291	0.173	0.125	0.124	---
	1-1/2 ⁽³⁾	38.1	1-1/8	29	C _V	6.34	12.3	19.8	28.3	40.0	57.4	73.8	86.2	96.7	104	0.47
					K _V	5.48	10.6	17.1	24.5	34.6	49.7	63.8	74.6	83.6	90.0	---
					X _T	0.192	0.155	0.146	0.149	0.140	0.117	0.117	0.129	0.146	0.160	---
	1-3/4 ⁽³⁾	44.5	1-1/8	29	C _V	4.59	9.97	18.9	31.4	42.0	57.2	75.6	91.8	105	112	0.55
					K _V	3.97	8.62	16.3	27.2	36.3	49.5	65.4	79.4	90.8	96.9	---
					X _T	0.244	0.244	0.193	0.171	0.184	0.179	0.174	0.192	0.218	0.243	---
	2 ⁽³⁾	50.8	1-1/8	29	C _V	9.72	23.0	37.0	53.1	70.1	85.0	97.4	109	117	123	0.62
					K _V	8.41	19.9	32.0	45.9	60.6	73.5	84.3	94.3	101	106	---
					X _T	0.246	0.150	0.148	0.151	0.160	0.179	0.218	0.259	0.295	0.314	---
	2-1/4 ⁽³⁾	57.2	1-1/8	29	C _V	7.08	16.0	32.9	46.4	59.4	79.2	94.2	106	116	122	0.70
					K _V	6.12	13.8	28.5	40.1	51.4	68.5	81.5	91.7	100	106	---
					X _T	0.292	0.247	0.180	0.212	0.251	0.258	0.305	0.353	0.380	0.410	---

Fisher, and Fisher-Rosemount and Micro-form are marks owned by Fisher Controls International, Inc. or Fisher-Rosemount Systems, Inc. All other marks are the property of their respective owners.

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1981, 1998;
All Rights Reserved



Design 461

Valve Size, Inches	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
4 x 6	2 ⁽³⁾	50.8	1-1/8	29	C _V	7.26	10.5	20.8	28.5	42.2	64.2	97.4	129	159	191	0.44
					K _V	6.28	9.08	18.0	24.7	36.5	55.5	84.3	112	138	165	---
					X _T	0.168	0.343	0.254	0.299	0.284	0.226	0.171	0.159	0.155	0.137	---
	2-1/4 ⁽³⁾	57.2	1-1/8	29	C _V	6.51	10.9	19.3	30.8	45.6	75.5	112	149	189	217	0.49
					K _V	5.63	9.43	16.7	26.6	39.4	65.3	96.9	129	163	188	---
					X _T	0.175	0.372	0.438	0.394	0.398	0.253	0.199	0.183	0.172	0.162	---
	2-1/2 ⁽³⁾	63.5	1-1/2	38	C _V	17.1	31.4	45.7	57.2	93.6	131	184	246	286	311	0.44
					K _V	14.8	27.2	39.5	49.5	81.0	113	159	213	247	269	---
					X _T	0.168	0.173	0.207	0.280	0.218	0.194	0.164	0.141	0.141	0.139	---
	2-3/4 ⁽³⁾	69.9	1-1/2	38	C _V	21.5	41.2	63.1	74.4	110	163	223	270	304	332	0.49
					K _V	18.6	35.6	54.6	64.4	95.2	141	193	234	263	287	---
					X _T	0.153	0.142	0.147	0.224	0.198	0.163	0.131	0.151	0.166	0.168	---
6 x 8	3 ⁽³⁾	76.2	1-1/2	38	C _V	14.8	36.4	55.3	87.4	125	204	248	273	305	331	0.56
					K _V	12.8	31.5	47.8	75.6	108	176	215	236	264	286	---
					X _T	0.264	0.210	0.256	0.228	0.227	0.149	0.164	0.201	0.214	0.226	---
	3-1/2 ⁽³⁾	88.9	2	51	C _V	16.9	34.5	56.5	84.6	120	162	213	273	322	342	0.42
					K _V	14.6	29.8	48.9	73.2	104	140	184	236	279	296	---
					X _T	0.244	0.244	0.241	0.241	0.238	0.235	0.229	0.216	0.199	0.209	---
	4 ⁽³⁾	101.6	2	51	C _V	27.5	43.9	55.4	84.8	128	209	329	395	429	475	0.52
					K _V	23.8	38.0	47.9	73.4	111	181	285	342	371	411	---
					X _T	0.179	0.284	0.464	0.448	0.388	0.263	0.168	0.183	0.211	0.202	---
	4-1/2 ⁽³⁾	114.3	2	51	C _V	29.7	61.7	100	151	214	289	372	474	568	605	0.53
					K _V	25.7	53.4	86.5	131	185	250	322	410	491	523	---
					X _T	0.244	0.244	0.242	0.240	0.236	0.234	0.231	0.220	0.198	0.207	---

1. At 100% travel.
2. Equal percentage characteristic (Micro Form).
3. Modified parabolic characteristic.

Catalog 12

Class 150										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	14	95	316	695	1200	1900	2840	3980	5120	6320
K _v		82.2	273	601	1038	1643	2457	3443	4429	5467
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	16	129	430	946	1640	2580	3870	5420	6970	8600
K _v		112	372	818	1419	2232	3348	4688	6029	7439
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.51	0.51	0.45	0.39	0.30	0.23
C _v	18	166	553	1220	2100	3320	4970	6960	8950	11,050
K _v		144	478	1055	1817	2872	4299	6020	7742	9558
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	20	208	692	1520	2630	4160	6230	8730	11,220	13,850
K _v		180	599	1315	2275	3598	5389	7551	9705	11,980
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	24	322	1080	2370	4080	6450	9670	13,540	17,410	21,500
K _v		277	934	2050	3529	5579	8365	11,712	15,060	18,598
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23



Type 8532

Class 300
Reverse Flow

Catalog 12
August 2002 - Page 8532-2

Class 300										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	14	136	341	704	1200	1860	2680	3450	4050	4550
K _v		118	295	609	1038	1609	2318	2984	3503	3936
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	16	169	422	873	1490	2310	3320	4280	5010	5630
K _v		146	365	755	1289	1998	2872	3702	4334	4870
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	18	247	617	1280	2180	3370	4860	6260	7330	8230
K _v		214	534	1107	1886	2915	4204	5415	6340	7119
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	20	286	714	1480	2520	3910	5620	7240	8480	9530
K _v		247	618	1280	2180	3382	4861	6263	7335	8243
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	24	375	938	1940	3320	5130	7380	9510	11,140	12,510
K _v		324	811	1678	2872	4437	6384	8226	9636	10,821
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23

Fisher is a mark owned by Fisher Controls International, Inc., a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International, Inc. 1990, 2002; All Rights Reserved Printed in USA



Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.25	11.4	19.9	32.6	48.1	58.9	64.0	69.8	80.2
K _V		1.95	9.86	17.2	28.2	41.6	50.9	55.4	60.4	69.4
F _L		- - -	0.78	0.77	0.76	0.74	0.76	0.77	0.76	0.71
X _T		0.295	0.289	0.315	0.314	0.357	0.497	0.540	0.518	0.442
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	3	3.21	20.8	40.5	66.7	90.1	115	150	189	237
K _V		2.78	18.0	35.0	57.7	77.9	99.5	130	163	205
F _L		0.78	0.89	0.80	0.75	0.68	0.71	0.65	0.61	0.58
X _T		0.855	0.602	0.461	0.404	0.372	0.358	0.306	0.259	0.232
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	18.2	52.6	96.7	154	199	270	351	447	499
K _V		15.7	45.5	83.6	133	172	234	304	387	432
F _L		0.80	0.85	0.79	0.73	0.74	0.69	0.64	0.61	0.53
X _T		0.474	0.474	0.500	0.416	0.407	0.326	0.271	0.220	0.196
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	34.7	109	198	321	452	664	882	1180	1250
K _V		30.0	94.3	171	278	391	574	763	1020	1080
F _L		0.85	0.83	0.75	0.71	0.71	0.67	0.65	0.61	0.55
X _T		0.389	0.552	0.528	0.438	0.424	0.331	0.278	0.206	0.203
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	60.5	190	345	560	788	1160	1540	2060	2180
K _V		52.3	164	298	484	682	1000	1330	1780	1890
F _L		0.81	0.81	0.79	0.82	0.71	0.66	0.60	0.55	0.48
X _T		0.368	0.520	0.498	0.412	0.399	0.310	0.261	0.193	0.191
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	83.3	259	463	727	1090	1670	2400	3340	3600
K _V		72.1	224	400	629	943	1440	2080	2890	3110
F _L		0.81	0.81	0.79	0.82	0.71	0.66	0.60	0.55	0.48
X _T		0.626	0.658	0.646	0.622	0.538	0.381	0.285	0.201	0.167
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	125	388	694	1090	1640	2500	3600	5010	5400
K _V		108	336	600	943	1420	2160	3110	4330	4670
F _L		0.83	0.78	0.78	0.78	0.75	0.66	0.61	0.52	0.47
X _T		0.528	0.556	0.547	0.528	0.451	0.324	0.241	0.170	0.141
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Type 8560

Class 150
Reverse Flow

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.11	9.96	20.7	34.0	50.5	68.4	81.0	81.0	81.0
K _V		1.83	8.62	17.9	29.4	43.7	59.2	70.0	70.0	70.0
F _L		- - -	0.88	0.84	0.77	0.71	0.69	0.67	0.71	0.69
X _T		0.399	0.507	0.354	0.334	0.340	0.342	0.359	0.401	0.401
F _d		0.090	0.17	0.26	.034	0.42	0.49	0.57	0.64	0.70
C _V	3	1.79	23.0	37.0	58.8	91.9	139	192	270	259
K _V		1.55	19.9	32.0	50.9	79.5	120	166	234	224
F _L		0.70	0.81	0.73	0.76	0.75	0.66	0.60	0.50	0.54
X _T		0.449	0.455	0.395	0.417	0.423	0.313	0.256	0.188	0.203
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	17.2	50.2	87.8	146	206	285	365	465	521
K _V		14.9	43.4	75.9	126	178	247	316	402	451
F _L		0.72	0.84	0.79	0.75	0.71	0.63	0.58	0.53	0.55
X _T		0.445	0.471	0.481	0.417	0.370	0.276	0.225	0.191	0.196
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	30.6	100	173	285	424	640	893	1180	1290
K _V		26.5	86.5	150	247	367	554	772	1020	1120
F _L		0.83	0.83	0.80	0.78	0.76	0.69	0.59	0.52	0.54
X _T		0.444	0.608	0.574	0.485	0.441	0.316	0.227	0.176	0.182
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	53.6	175	303	499	743	1120	1560	2070	2260
K _V		46.4	151	262	432	643	969	1350	1790	1950
F _L		0.79	0.83	0.82	0.79	0.73	0.66	0.58	0.51	0.48
X _T		0.413	0.567	0.534	0.449	0.409	0.295	0.213	0.164	0.170
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	84.4	232	423	737	1180	1730	2560	3250	3710
K _V		73.0	200	366	638	1020	1500	2210	2810	3210
F _L		0.79	0.83	0.82	0.79	0.73	0.66	0.58	0.51	0.48
X _T		0.542	0.745	0.673	0.590	0.489	0.380	0.245	0.189	0.156
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	126	347	631	1100	1760	2590	3820	4850	5540
K _V		109	300	546	95.2	1520	2240	3300	4200	4790
F _L		0.78	0.87	0.85	0.80	0.75	0.69	0.55	0.51	0.47
X _T		0.491	0.671	0.610	0.535	0.443	0.343	0.222	0.171	0.141
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Catalog 12

July 2001
Page 8560 - 2

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1998, 2001;
All Rights Reserved

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.25	11.4	19.9	32.6	48.1	58.9	64.0	69.8	80.2
K _V		1.95	9.86	17.2	28.2	41.6	50.9	55.4	60.4	69.4
F _L		- - -	0.78	0.77	0.75	0.74	0.75	0.77	0.75	0.71
X _T		0.299	0.292	0.319	0.318	0.362	0.502	0.546	0.525	0.446
F _d		0.090	0.17	0.26	.034	0.42	0.49	0.57	0.64	0.70
C _V	3	3.21	20.8	40.5	66.7	90.1	115	150	189	237
K _V		2.78	18.0	35.0	57.7	77.9	99.5	130	163	205
F _L		0.78	0.88	0.78	0.77	0.79	0.80	0.72	0.69	0.64
X _T		0.370	0.542	0.433	0.411	0.464	0.469	0.397	0.346	0.286
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	12.9	37.4	72.9	124	174	236	318	420	488
K _V		11.2	32.4	63.1	107	151	204	275	363	422
F _L		0.81	0.86	0.79	0.73	0.72	0.71	0.65	0.60	0.54
X _T		0.455	0.499	0.416	0.395	0.410	0.363	0.292	0.235	0.210
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	39.6	120	215	340	440	598	777	1050	1100
K _V		34.3	104	186	294	381	604	672	908	952
F _L		0.80	0.77	0.71	0.68	0.71	0.68	0.62	0.60	0.56
X _T		0.420	0.433	0.434	0.369	0.360	0.299	0.282	0.214	0.205
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	73.9	224	401	634	821	1120	1450	1960	2070
K _V		63.9	194	347	548	710	969	1250	1700	1790
F _L		0.80	0.79	0.77	0.75	0.71	0.66	0.61	0.55	0.49
X _T		0.367	0.380	0.381	0.322	0.314	0.260	0.248	0.187	0.177
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	64.6	248	453	706	1070	1630	2340	3280	3480
K _V		55.9	215	392	611	926	1410	2020	2840	3010
F _L		0.80	0.79	0.77	0.75	0.71	0.66	0.61	0.55	0.49
X _T		0.464	0.565	0.562	0.544	0.455	0.335	0.255	0.179	0.159
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	95.2	365	668	1040	1580	2410	3450	4840	5130
K _V		82.3	316	578	900	1370	2080	2980	4190	4440
F _L		0.86	0.80	0.78	0.79	0.74	0.67	0.59	0.53	0.48
X _T		0.422	0.514	0.506	0.492	0.412	0.301	0.231	0.162	0.144
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Type 8560

Class 300
Reverse Flow

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.11	9.96	20.7	34.0	50.5	68.4	81.0	81.0	81.0
K _V		1.83	8.62	17.9	29.4	43.7	59.2	70.0	70.0	70.0
F _L		- - -	0.88	0.84	0.77	0.71	0.69	0.67	0.71	0.69
X _T		0.399	0.507	0.354	0.334	0.340	0.342	0.359	0.401	0.401
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	3	1.79	23.0	37.0	58.8	91.9	139	192	270	259
K _V		1.55	19.9	32.0	50.9	79.5	120	166	234	224
F _L		0.71	0.75	0.77	0.81	0.79	0.71	0.62	0.49	0.59
X _T		0.370	0.542	0.433	0.411	0.464	0.469	0.397	0.346	0.286
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	12.7	35.2	61.3	105	163	242	361	463	482
K _V		11.0	30.4	53.0	90.8	141	209	312	400	417
F _L		0.74	0.80	0.82	0.80	0.77	0.69	0.57	0.51	0.55
X _T		0.455	0.499	0.416	0.395	0.410	0.363	0.292	0.235	0.210
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	38.8	106	183	294	436	605	779	976	1100
K _V		33.6	91.7	158	254	377	523	674	844	952
F _L		0.78	0.81	0.79	0.80	0.74	0.68	0.59	0.58	0.57
X _T		0.420	0.433	0.434	0.369	0.360	0.299	0.282	0.214	0.205
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	73.1	200	345	554	821	1140	1470	1840	2090
K _V		63.2	173	298	479	710	986	1270	1590	1810
F _L		0.80	0.83	0.83	0.80	0.74	0.66	0.58	0.50	0.48
X _T		0.405	0.454	0.542	0.451	0.346	0.269	0.239	0.206	0.173
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	66.2	217	399	708	1110	1690	2400	3100	3560
K _V		57.3	188	345	612	960	1460	2080	2680	3080
F _L		0.80	0.83	0.83	0.80	0.74	0.66	0.58	0.50	0.48
X _T		0.505	0.714	0.672	0.557	0.465	0.339	0.243	0.187	0.155
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	100	328	603	1070	1680	2550	3620	4690	5380
K _V		86.5	284	522	926	1450	2210	3130	4060	4650
F _L		0.80	0.86	0.87	0.80	0.75	0.66	0.55	0.50	0.48
X _T		0.451	0.636	0.595	0.494	0.414	0.303	0.217	0.167	0.138
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Catalog 12

July 2001
Page 8560 - 4

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1998, 2001;
All Rights Reserved

8580 Valve
PN 10 through PN 40, CL150 and CL300

Catalog 12

January 2009 - Page 8580-1

Approximately Linear Disk
Forward Flow

PN 10 through PN 40, CL150 and CL300											Approximately Linear Characteristic
Valve Size		Coefficients	Valve Rotation, Degrees								
DN	NPS		10	20	30	40	50	60	70	80	90
50	2	C _v	2.28	7.7	21.5	35.5	51	58.9	62.4	78.3	83.7
		K _v	1.97	6.7	18.6	30.7	44.1	50.9	53.9	67.7	72.3
		F _d	0.16	0.21	0.21	0.25	0.29	0.32	0.36	0.37	0.39
		F _L	---	0.91	0.84	0.76	0.73	0.78	0.80	0.68	0.66
		X _T	---	0.76	0.53	0.39	0.39	0.52	0.54	0.39	0.35
80	3	C _v	3.50	22.1	46.3	73.1	120	147	181	239	275
		K _v	3.02	19.1	40.0	63.2	103.7	127	156	206	238
		F _d	0.10	0.17	0.23	0.27	0.32	0.33	0.41	0.47	0.51
		F _L	0.77	0.81	0.79	0.79	0.69	0.70	0.67	0.62	0.58
		X _T	0.46	0.60	0.54	0.55	0.40	0.37	0.35	0.29	0.23
100	4	C _v	9.40	48.8	90.6	137	171	224	297	397	484
		K _v	8.12	42.2	78.3	118	148	194	257	343	418
		F _d	0.10	0.18	0.23	0.28	0.33	0.38	0.43	0.50	0.53
		F _L	0.9	0.83	0.80	0.77	0.77	0.74	0.68	0.62	0.58
		X _T	0.48	0.47	0.48	0.48	0.46	0.39	0.32	0.26	0.22
150	6	C _v	26.2	99.1	181	283	401	543	717	951	1000
		K _v	22.6	85.6	156	245	346	469	619	822	864
		F _d	0.10	0.18	0.26	0.31	0.36	0.40	0.43	0.47	0.49
		F _L	0.82	0.79	0.77	0.74	0.72	0.68	0.66	0.61	0.58
		X _T	0.44	0.48	0.52	0.48	0.42	0.36	0.32	0.26	0.22
200	8	C _v	44.6	138	285	457	698	994	1390	2190	2550
		K _v	38.5	119	246	395	603	859	1201	1892	2203
		F _d	0.13	0.20	0.25	0.31	0.37	0.43	0.47	0.51	0.55
		F _L	0.86	0.94	0.82	0.71	0.68	0.67	0.61	0.54	0.47
		X _T	0.49	0.43	0.54	0.52	0.45	0.36	0.31	0.18	0.14
250	10	C _v	72.0	225	423	729	1150	1720	2440	3370	3720
		K _v	62.2	194	365	630	994	1486	2108	2912	3214
		F _d	0.12	0.18	0.23	0.26	0.36	0.41	0.45	0.57	0.54
		F _L	0.89	0.78	0.82	0.75	0.70	0.66	0.60	0.55	0.50
		X _T	0.53	0.42	0.57	0.49	0.41	0.32	0.23	0.18	0.16
300	12	C _v	128	401	733	1220	1800	2490	3380	4470	5080
		K _v	111	346	633	1054	1555	2151	2920	3862	4389
		F _d	0.13	0.19	0.25	0.31	0.38	0.44	0.47	0.50	0.53
		F _L	0.83	0.73	0.74	0.70	0.69	0.66	0.61	0.51	0.50
		X _T	0.41	0.34	0.46	0.42	0.36	0.30	0.24	0.18	0.16



8580 Valve
PN 10 through PN 40, CL150 and CL300

Approximately Linear Disk
Forward Flow

Catalog 12
January 2009 - Page 8580-2

This page intentionally left blank

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2009; All Rights Reserved Printed in USA



Catalog 12

August 2012 - Page 9500-1

Conventional Disk											
Approximately Equal Percentage Characteristic											
Valve Size, NPS	Coefficients	Disk Angle of Opening, Degrees									
		0	10	20	30	40	50	60	70	80	90
2	C _V	0	0.2	1.8	5.7	12.7	24.0	40.1	71.4	86.7	91.2
	K _V	0	0.17	1.56	4.93	11.0	20.8	34.7	61.8	75.0	78.9
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.490	.490	.563	.563	.494	.413	.255	.189	.185
3	C _V	0	0.5	5.1	16.1	35.8	67.6	112	200	243	256
	K _V	0	0.43	4.41	13.9	31.0	58.5	96.9	173	210	221
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.490	.490	.563	.563	.494	.413	.255	.189	.185
4	C _V	0	1.0	10.3	32.6	72.5	136	227	405	492	518
	K _V	0	0.87	8.91	28.2	62.7	118	196	350	426	448
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.490	.490	.563	.563	.494	.413	.255	.189	.185
6	C _V	0	22.7	55.9	131	244	454	769	1120	1610	1750
	K _V	0	19.6	48.4	113	211	393	665	969	1390	1510
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.391	.394	.426	.436	.449	.375	.270	.139	.128
8	C _V	0	36.6	90.2	211	394	733	1240	1800	2500	2820
	K _V	0	31.7	78.0	183	341	634	1070	1560	2160	2440
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.391	.394	.426	.436	.449	.375	.270	.139	.128
10	C _V	0	60.2	148	347	648	1200	2040	2960	4260	4630
	K _V	0	52.1	128	300	561	1040	1760	2560	3680	4000
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.391	.394	.426	.436	.449	.375	.270	.139	.128
12	C _V	0	91.2	224	526	982	1820	3090	4490	6460	7020
	K _V	0	78.9	194	455	849	1570	2670	3880	5590	6070
	F _L	0	.78	.80	.82	.84	.80	.74	.67	.59	.55
	X _T	0	.391	.394	.426	.436	.449	.375	.270	.139	.128



Fishtail™ Disk										Approximately Equal Percentage Characteristic	
Valve Size, NPS	Coefficients	Disk Angle of Opening, Degrees									
		0	10	20	30	40	50	60	70	80	90
2	C _V	0	1.81	4.78	8.37	14.3	24.6	39.5	61.7	80	91
	K _V	0	1.57	4.13	7.24	12.4	21.3	34.2	53.4	69.2	78.7
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.563	.601	.555	.462	.331	.294	.205
3	C _V	0	4.0	10.6	18.7	31.8	54.8	92	138	179	203
	K _V	0	3.46	9.17	16.2	27.5	47.4	79.6	119	155	176
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.563	.601	.555	.462	.331	.294	.205
4	C _V	0	7.75	19.4	35	61.2	102	171	275	408	490
	K _V	0	6.70	16.8	30.3	52.9	88.2	148	238	353	424
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.563	.601	.555	.462	.331	.294	.205
6	C _V	0	16.8	44.3	78.9	141	232	399	638	994	1220
	K _V	0	14.5	38.3	68.2	122	201	345	552	860	1060
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.766	.744	.620	.515	.372	.228	.160
8	C _V	0	29.9	78.8	140	252	412	710	1130	1770	2170
	K _V	0	25.9	68.2	121	218	356	614	977	1530	1880
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.766	.744	.620	.515	.372	.228	.160
10	C _V	0	46	123	222	412	672	1170	1910	3160	4010
	K _V	0	39.8	106	192	356	581	1010	1650	2730	3470
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.766	.744	.620	.515	.372	.228	.160
12	C _V	0	79	178	322	592	967	1680	2720	4470	5640
	K _V	0	68.3	154	279	512	836	1450	2350	3870	4880
	F _L	0	.84	.84	.84	.84	.82	.78	.71	.67	.66
	X _T	0	.466	.559	.766	.744	.620	.515	.372	.228	.160

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Fishtail are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

December 2009 - Page 24000SB-1

Flow Up

CL150 to CL900

Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1/2	588	=%	6.4	0.25	---	0.01	0.02	0.02	0.03	0.04	0.06	0.08	0.12	0.17	0.25	0.91
			6.4	0.25	---	0.01	0.02	0.03	0.05	0.07	0.10	0.14	0.26	0.50	0.70	0.81
			6.4	0.25	---	0.00	0.01	0.02	0.03	0.05	0.08	0.13	0.21	0.37	0.57	0.90
			6.4	0.25	0.01	0.01	0.03	0.05	0.08	0.13	0.21	0.35	0.55	1.15	1.37	0.83
			6.4	0.25	0.04	0.04	0.09	0.15	0.21	0.27	0.55	0.84	1.11	1.34	1.52	0.91
			6.4	0.25	0.03	0.03	0.10	0.11	0.18	0.32	0.51	1.02	1.71	2.00	2.10	0.87
3/4	588	=%	6.4	0.25	---	0.02	0.02	0.03	0.04	0.05	0.06	0.08	0.12	0.17	0.23	0.94
			6.4	0.25	---	0.01	0.02	0.03	0.04	0.07	0.10	0.13	0.23	0.39	0.58	0.92
			6.4	0.25	0.02	0.02	0.03	0.06	0.09	0.13	0.21	0.34	0.50	0.89	1.13	0.95
			9.5	0.375	0.03	0.03	0.08	0.14	0.19	0.26	0.55	0.86	1.12	1.35	1.55	>0.94
			9.5	0.375	0.02	0.03	0.08	0.13	0.19	0.26	0.55	0.86	1.11	1.30	1.46	0.90
			9.5	0.375	0.03	0.04	0.08	0.12	0.19	0.33	0.52	1.10	1.76	2.06	2.21	0.92
	688	Linear	20.6	0.8125	0.11	0.18	0.41	0.63	0.86	1.09	1.46	1.98	2.57	3.13	3.96	0.85
			9.5	0.375	---	0.08	0.33	0.54	0.72	0.91	1.11	1.27	1.76	2.09	2.25	0.90
1	588	=%	6.4	0.25	---	0.02	0.02	0.03	0.04	0.05	0.06	0.08	0.12	0.16	0.24	0.94
			6.4	0.25	---	0.01	0.02	0.03	0.05	0.07	0.09	0.14	0.23	0.39	0.60	>0.93
			6.4	0.25	0.01	0.02	0.03	0.05	0.08	0.13	0.21	0.34	0.52	0.94	1.24	>0.95
			9.5	0.375	0.03	0.03	0.08	0.13	0.19	0.26	0.55	0.86	1.18	1.41	1.66	>0.94
			9.5	0.375	0.02	0.03	0.07	0.11	0.18	0.32	0.52	1.02	1.92	2.43	2.63	0.92
			20.6	0.8125	0.13	0.21	0.44	0.68	0.91	1.15	1.51	2.05	2.69	3.31	4.21	0.86
			20.6	0.8125	0.10	0.15	0.3	0.6	1.0	1.5	2.8	4.6	5.6	6.2	6.4	0.89

1. At 100% travel.



CL150 to CL300																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1/2	588	=%	6.4	0.25	0.000	0.001	0.005	0.011	0.019	0.033	0.045	0.062	0.094	0.145	0.211	0.80
			6.4	0.25	0.004	0.012	0.021	0.029	0.048	0.065	0.10	0.14	0.24	0.41	0.60	>0.92
			9.5	0.375	0.02	0.03	0.1	0.1	0.2	0.3	0.6	0.9	1.1	1.4	1.6	>0.9
			9.5	0.375	0.02	0.03	0.1	0.1	0.2	0.3	0.4	0.6	1.1	2.3	2.5	>0.87
			20.6	0.8125	- - -	0.09	0.24	0.55	0.93	1.5	2.1	3.2	5.1	6.2	6.7	- - -
3/4	588	=%	20.6	0.8125	- - -	0.19	0.40	0.67	1.5	2.4	4.4	6.0	7.9	8.8	10.0	- - -

1. At 100% travel.

Catalog 12

December 2009 - Page 24000SVF-2

Flow Up

CL150 to CL300																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1	577	=%	20.6	0.8125	0.20	0.24	0.45	0.69	0.9	1.2	1.6	2.3	3.0	3.7	4.8	0.80
			20.6	0.8125	0.34	0.64	1.36	2.08	2.8	3.5	4.7	7.5	9.4	10.9	12.7	>0.58
			27	1.0625	0.65	1.20	1.90	2.84	3.8	5.4	8.8	11.8	13.7	15.7	16.9	>0.47
	588	=%	9.5	0.375	0.02	0.03	0.07	0.11	0.2	0.3	0.4	0.6	1.1	2.3	2.5	>0.87
			20.6	0.8125	0.09	0.19	0.42	0.67	0.9	1.2	1.6	2.2	2.9	3.7	4.8	>0.73
			20.6	0.8125	0.11	0.18	0.35	0.62	1.1	1.7	3.1	5.6	7.7	9.9	11.8	>0.6
			27	1.0625	0.20	0.30	0.61	1.03	1.6	2.5	3.8	6.1	8.5	12.1	14.8	>0.52
			27	1.0625	- - -	0.27	0.59	1.08	1.80	3.03	5.14	7.37	9.62	13.7	15.5	- - -
	677	Linear	20.6	0.8125	0.29	0.32	0.66	1.08	1.47	1.89	2.29	2.69	3.09	3.5	4.5	>0.83
	688	Linear	9.5	0.375	0.04	0.09	0.38	0.68	0.98	1.24	1.52	1.77	2.17	2.9	3.4	>0.81
			20.6	0.8125	0.09	0.28	0.76	1.22	1.67	2.12646	2.58	3.04	3.46	3.9	4.8	>0.8
			20.6	0.8125	0.13	0.55	1.78	2.96	4.02	5.05	6.18	7.75	9.39	10.7	11.8	>0.59
			27	1.0625	0.24	0.61	1.37	2.11	2.83	3.49	4.45	6.44	9.69	13.1	15.4	>0.51
1-1/2	577	=%	32	1.25	- - -	0.16	0.29	0.58	1.12	1.79	2.56	3.67	5.31	7.73	13.30	0.76
			32	1.25	0.81	1.28	2.30	3.26	4.30	6.15	12.54	17.17	22.50	25.35	26.67	>0.73
			38	1.5	0.08	0.12	0.29	0.59	1.1	1.9	2.9	4.2	6.2	9.1	13.6	- - -
			38	1.5	0.48	0.80	1.48	2.13	2.79	3.48	4.85	6.92	10.3	14.9	20.2	>0.77
			38	1.5	1.30	2.10	3.63	5.64	7.82	13.8	19.16	24.13	29.05	31.47	33.07	>0.71
	588	=%	32	1.25	0.16	0.20	0.4	0.6	1.0	1.6	2.3	3.4	4.8	6.9	10.7	0.80
			32	1.25	0.24	0.53	1.1	1.8	2.8	4.2	9.5	14.6	20.6	25.2	27.2	>0.72
			38	1.5	0.13	0.16	0.29	0.52	0.92	1.54	2.36	3.50	5.18	7.59	11.05	>0.89
			38	1.5	0.50	0.74	1.4	2.1	2.8	3.4	4.4	6.2	9.3	13.9	19.1	>0.81
			38	1.5	0.66	1.1	2.0	3.1	5.0	7.7	14.1	19.5	24.1	29.0	31.7	>0.67
			38	1.5	- - -	0.85	1.7	2.8	4.6	7.4	12.6	17.8	23.6	30.2	32.7	- - -
	677	Linear	32	1.25	0.99	2.13	4.6	6.9	9.1	11.8	16.8	20.9	24.2	25.9	26.9	>0.73
			38	1.5	0.28	0.96	2.38	3.74	5.07	6.40	7.66	8.94	10.3	11.5	14.0	- - -
			38	1.5	0.59	0.94	3.41	6.10	8.62	11.2	13.6	16.0	18.4	20.7	23.9	>0.75
	688	Linear	32	1.25	- - -	0.51	1.65	2.80	3.93	5.08	6.16	7.21	8.22	9.09	11.09	0.86
			32	1.25	0.48	1.31	3.1	4.8	6.4	7.9	10.5	14.4	18.6	23.6	26.0	>0.74
			38	1.5	0.19	0.45	1.86	3.23	4.58	5.88	7.16	8.42	9.83	11.00	12.21	0.82
			38	1.5	0.2	0.6	1.9	4.6	7.3	9.8	12.3	14.8	17.1	19.4	22.2	>0.73
			38	1.5	0.63	1.51	3.14	4.80	6.37	8.10	12.9	18.3	24.1	28.8	31.7	>0.67

1. At 100% travel.



CL150 to CL300																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
2	577	=%	38	1.5	0.08	0.12	0.29	0.59	1.1	1.9	2.9	4.2	6.2	9.1	13.6	---
			38	1.5	0.48	0.80	1.5	2.1	2.8	3.5	4.8	6.9	10.3	14.9	20.2	>0.77
			38	1.5	1.30	2.10	3.63	5.64	7.53	13.0	19.94	25.97	31.8	35.8	38.8	>0.64
			51	2.0	1.00	1.25	1.9	2.8	4.2	6.0	8.8	13.1	18.9	25.8	33.0	>0.74
	588	=%	38	1.5	0.13	0.16	0.29	0.52	0.92	1.5	2.4	3.5	5.2	7.6	11.1	>0.89
			38	1.5	0.20	0.51	1.2	1.8	2.5	3.1	4.2	5.9	8.7	13.3	18.4	---
			38	1.5	0.41	0.82	1.7	2.7	4.5	7.2	11.8	19.7	25.4	30.9	35.0	---
			51	2	0.42	0.76	1.4	1.9	3.0	4.6	6.8	10.0	15.0	21.4	28.7	---
			51	2	1.09	1.67	3.79	6.70	12.6	19.1	30.3	39.9	47.0	52.2	55.4	---
			51	2	---	1.57	3.81	6.46	11.2	18.2	28.5	37.8	45.3	50.3	53.7	---
	677	Linear	38	1.5	0.28	0.96	2.4	3.7	5.1	6.4	7.7	8.9	10.3	11.5	14.0	---
			38	1.5	0.59	0.94	3.4	6.1	8.6	11.2	13.6	16.0	18.4	20.7	23.9	>0.75
			38	1.5	1.03	1.63	2.99	4.91	7.00	10.4	17.8	25.2	30.8	35.4	38.2	>0.6
			51	2	4.32	5.96	9.81	13.64	17.32	20.9	24.4	27.8	30.9	34.1	37.5	>0.69
			51	2	3.27	4.61	7.5	13.8	22.6	32.8	42.0	47.9	52.1	55.0	56.4	>0.55
	688	Linear	38	1.5	0.19	0.45	1.9	3.2	4.6	5.9	7.2	8.4	9.8	11.0	12.2	0.82
			38	1.5	0.25	0.55	1.9	4.6	7.3	9.8	12.3	14.8	17.1	19.4	22.2	>0.73
			38	1.5	0.47	1.25	2.8	4.5	6.1	7.6	11.7	18.3	24.1	30.3	35.1	---
			51	2	0.75	2.84	7.0	10.8	14.7	18.3	21.6	24.6	27.3	30.1	33.2	---
			51	2	1.01	1.39	3.9	7.4	12.3	19.0	29.8	39.5	46.5	51.9	55.3	---

1. At 100% travel.

Catalog 12

December 2009 - Page 26000-1

Flow Up

CWP 150 PSI																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1	177	=%	8	0.312	- - -	0.00	0.01	0.02	0.04	0.06	0.1	0.1	0.1	0.2	0.2	0.95
			13	0.5	0.01	0.03	0.10	0.19	0.45	0.86	1.4	2.1	3.0	4.2	5.4	- - -

1. At 100% travel.



CL150 to CL900																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1/4	4	=%	4	0.156	---	0.00056	0.010	0.016	0.021	0.030	0.055	0.102	0.157	0.265	0.417	0.98
	5	=%	4	0.156	---	0.00009	0.00065	0.0043	0.011	0.015	0.021	0.043	0.089	0.132	0.152	0.98
	6	mod =%	4	0.156	0.00072	0.00180	0.0046	0.0091	0.016	0.033	0.059	0.086	0.095	0.100	0.103	0.98
	7	mod =%	4	0.156	---	0.00067	0.0033	0.0072	0.013	0.018	0.023	0.031	0.041	0.051	0.065	0.98
	8	mod =%	4	0.156	0.00045	0.00114	0.0027	0.0049	0.0077	0.012	0.016	0.021	0.026	0.033	0.041	0.98
	9	mod =%	4	0.156	---	0.00002	0.00039	0.00101	0.0021	0.0033	0.0047	0.0064	0.0082	0.010	0.014	0.98
	10	mod =%	4	0.156	---	0.00002	0.00023	0.00060	0.0011	0.0017	0.0026	0.0034	0.0044	0.0054	0.0066	0.98
	11	mod =%	4	0.156	0.00003	0.00010	0.00037	0.00065	0.0012	0.0018	0.0026	0.0033	0.0042	0.0050	0.0059	0.98
	12	mod =%	4	0.156	---	---	0.00004	0.00020	0.00042	0.00071	0.0011	0.0015	0.0020	0.0025	0.0030	0.98
	13	mod =%	4	0.156	---	---	0.00003	0.00011	0.00025	0.00039	0.00057	0.00080	0.0010	0.0013	0.0016	0.98
	14	mod =%	4	0.156	---	---	0.00002	0.00006	0.00012	0.00021	0.00030	0.00042	0.00052	0.00065	0.00079	0.98
	15	mod =%	4	0.156	0.000002	0.000006	0.00002	0.00004	0.00006	0.00009	0.00011	0.00015	0.0002	0.00023	0.00025	0.98
	16	mod =%	4	0.156	0.000001	0.000003	0.00001	0.00002	0.00003	0.00005	0.00006	0.00008	0.0001	0.00012	0.00013	0.98

1. At 100% travel.

Catalog 12

December 2009 - Page 83000-1

Flow Up

CWP 275 PSI																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1/2	Air	mod =%	0.635	0.025	0.000	0.000	0.002	0.005	0.007	0.009	0.011	0.012	0.012	0.013	0.014	0.85
	Water	mod =%	0.635	0.025	---	0.000	0.001	0.003	0.005	0.008	0.009	0.009	0.010	0.010	0.011	0.82
	Air	mod =%	1.60	0.063	0.000	0.000	0.004	0.013	0.020	0.027	0.034	0.039	0.045	0.049	0.053	0.85
	Water	mod =%	1.60	0.063	---	---	0.000	0.007	0.015	0.021	0.028	0.033	0.038	0.044	0.047	0.67
	Air	mod =%	7.92	0.312	0.000	0.000	0.001	0.006	0.020	0.044	0.071	0.099	0.129	0.157	0.182	0.85
	Water	mod =%	7.92	0.312	---	0.000	0.005	0.017	0.035	0.056	0.076	0.098	0.120	0.141	0.160	0.67
	Air	mod =%	7.92	0.312	0.000	0.000	0.043	0.099	0.165	0.223	0.281	0.336	0.379	0.407	0.427	0.85
	Water	mod =%	7.92	0.312	---	---	0.034	0.092	0.149	0.205	0.263	0.314	0.352	0.385	0.414	0.76
	Air	mod =%	13.2	0.52	0.000	0.031	0.072	0.144	0.215	0.296	0.377	0.448	0.519	0.576	0.631	0.85
	Water	mod =%	13.2	0.52	---	---	0.073	0.146	0.226	0.298	0.382	0.451	0.539	0.606	0.675	0.85
	Water	mod =%	13.2	0.52	---	0.019	0.131	0.250	0.368	0.492	0.622	0.726	0.832	0.929	1.019	0.85
	Water	mod =%	13.2	0.52	---	0.01	0.14	0.32	0.54	0.71	0.86	1.02	1.13	1.23	1.30	0.91
1. At 100% travel.																



CWP 150 PSI																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1	A-B(.5)	mod =%	25.4	1	0.018	0.021	0.11	0.29	0.54	0.84	1.20	1.58	1.99	2.38	2.79	---
	B-A(.5)	mod =%	25.4	1	0.00	0.00	0.10	0.33	0.61	0.93	1.34	1.69	2.10	2.49	2.91	---
	A-B(.5)	mod =%	25.4	1	0.00	0.002	0.036	0.49	1.13	1.86	2.55	3.32	4.03	4.71	5.33	---
	B-A(.5)	mod =%	25.4	1	0.00	0.001	0.079	0.66	1.37	2.06	2.77	3.49	4.30	5.07	5.84	---
	A-B(.75)	mod =%	25.4	1	0.014	0.204	0.925	2.01	4.00	5.59	6.23	6.61	6.61	6.64	6.60	---
	B-A(.75)	mod =%	25.4	1	0.00	0.091	0.831	2.23	4.42	6.13	7.12	7.55	7.54	7.55	7.55	---
1-1/2	A-B(.75)	mod =%	38.1	1.5	---	2.18	4.86	8.00	12.00	15.49	19.13	22.92	25.86	28.18	29.55	---
	B-A(.75)	mod =%	38.1	1.5	1.68	2.73	5.39	8.43	12.10	14.06	15.73	17.85	20.20	22.51	24.17	---
2	B-A(.5)	mod =%	50.8	2	---	0.002	0.092	2.22	5.13	9.34	13.02	15.59	17.35	19.05	21.34	---
	A-B(.75)	mod =%	50.8	2	---	3.90	3.90	8.46	14.20	20.50	26.08	31.01	35.29	39.64	42.59	---
	B-A(.75)	mod =%	50.8	2	---	0.00	1.35	3.06	11.31	16.17	21.49	24.54	25.99	29.16	32.53	---
1. At 100% travel.																

Catalog 12

December 2009 - Page 87000-1

Flow Up

CWP 275 PSI																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
1/2	N/A	mod linear	12.7	1/2	---	0.01	0.1	0.3	0.5	0.7	0.9	1.0	1.1	1.2	1.3	---
1. At 100% travel.																



CWP 250 PSI																
Valve Size, NPS	Trim	Flow Char	Port Diameter		Experimentally Determined Cv at Valve Opening—Percent of Total Travel											FL ⁽¹⁾
			mm	Inch	5	10	20	30	40	50	60	70	80	90	100	
2	F-Open	mod =%	38.1	1.5	1.99	2.60	3.1	3.9	4.9	6.5	8.4	12.2	16.1	22.6	28.6	>0.62
	F-Close	mod =%	38.1	1.5	— — —	2.68	4.1	5.3	6.4	7.6	8.8	10.3	13.5	23.1	31.5	>0.58
1. At 100% travel.																

Catalog 12

October 2008 - Page A11-1

CL150/150 and 150
Reverse Flow

CL150/150										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	30	608	2030	4460	7700	12,200	18,200	25,500	32,800	40,500
K_v		526	1760	3860	6660	10,600	15,700	22,100	28,400	35,000
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	36	910	3030	6670	11,500	18,200	27,300	38,200	49,100	60,600
K_v		787	2620	5770	9950	15,700	23,600	33,000	42,500	52,400
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	42	1200	3990	8780	15,200	24,000	35,900	50,300	64,700	79,800
K_v		1040	3450	7600	13,100	20,800	31,100	43,500	56,000	69,000
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	48	1590	5300	11,700	20,100	31,800	47,700	66,800	85,800	106,000
K_v		1380	4580	10,100	17,400	27,500	41,300	57,800	74,200	91,700
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23

CL150										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	30	508	1690	3730	6440	10,200	15,200	21,300	27,400	33,900
K_v		439	1460	3230	5570	8823	13,100	18,400	23,700	29,300
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	36	757	2520	5550	9590	15,100	22,700	31,800	40,900	50,500
K_v		654	2180	4800	8300	13,100	19,600	27,500	35,400	43,700
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	42	1090	3640	8000	13,800	21,800	32,700	45,800	58,900	72,700
K_v		943	3150	6920	11,900	18,900	28,300	39,600	50,900	62,900
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C_v	48	1390	4630	10,200	17,600	27,800	41,700	58,400	75,000	92,600
K_v		1200	4000	8820	15,200	24,000	36,100	50,500	64,900	80,100
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X_T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23



CL300										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	30	715	1790	3700	6320	9780	14,000	18,100	21,200	23,800
K_v		618	1550	3200	5470	8460	12,100	15,700	18,300	20,600
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	36	1100	2760	5700	9750	15,100	21,700	28,000	32,800	36,800
K_v		952	2390	4930	8430	13,100	18,800	24,200	28,400	31,800
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	42	1710	4280	8840	15,100	23,400	33,700	43,400	50,800	57,100
K_v		1480	3700	7650	13,100	20,200	29,200	37,500	43,900	49,400
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	48	1870	4670	9650	16,500	25,500	36,700	47,300	55,400	62,200
K_v		1620	4040	8350	14,300	22,100	31,700	40,900	47,900	53,800
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23

CL600										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	3	5	16	31	51	84	122	151	169	182
K_v		4	14	27	44	73	106	131	146	157
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	4	8	23	43	71	116	169	209	234	252
K_v		7	20	37	61	100	146	181	202	218
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	6	15	46	87	144	236	344	426	477	513
K_v		13	40	75	125	204	298	368	413	444
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

Catalog 12

October 2008 - Page A11-3

CL600

Reverse Flow

CL600										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	8	35	104	197	324	532	775	960	1080	1160
K_v		30	90	170	280	460	670	830	934	1000
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	10	62	185	350	577	947	1380	1710	1920	2060
K_v		53	160	303	499	819	1190	1480	1660	1780
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	12	85	255	481	793	1300	1900	2350	2630	2830
K_v		74	221	416	686	1120	1640	2030	2270	2450
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	14	104	312	590	971	1600	2320	2880	3230	3470
K_v		90	270	510	840	1380	2010	2490	2790	3000
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	16	138	413	781	1290	2110	3080	3810	4270	4590
K_v		119	357	676	1120	1830	2660	3300	3690	3970
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	18	175	524	989	1630	2680	3900	4830	5410	5820
K_v		151	453	855	1410	2320	3370	4180	4680	5030
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	20	196	588	1110	1830	3010	4380	5430	6080	6540
K_v		170	509	960	1580	2600	3790	4700	5260	5660
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23
C_v	24	349	1050	1980	3260	5350	7790	9650	10,800	11,600
K_v		302	908	1710	2820	4630	6740	8350	9340	10,000
F_d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.73	0.66	0.59	0.55	0.52
X_T		0.51	0.55	0.55	0.52	0.45	0.37	0.29	0.25	0.23



CL900										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	6	17	52	100	174	265	343	385	417	434
K_v		15	45	87	151	229	297	333	361	375
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	8	30	89	170	296	452	585	659	711	741
K_v		26	77	147	256	391	506	570	615	641
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	10	56	169	324	563	859	1112	1253	1352	1408
K_v		48	146	280	487	743	962	1084	1169	1218
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	12	50	151	290	504	769	995	1121	1210	1260
K_v		43	131	251	436	665	861	970	1047	1090
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	14	111	332	636	1106	1687	2184	2461	2654	2765
K_v		96	287	550	957	1459	1889	2129	2296	2392
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	16	140	421	806	1402	2138	2769	3119	3365	3505
K_v		121	364	697	1213	1849	2395	2698	2911	3032
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	18	182	546	1046	1820	2775	3594	4049	4367	4549
K_v		157	472	905	1574	2400	3109	3502	3777	3935
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	20	214	614	1228	2135	3256	4217	4751	5124	5338
K_v		185	531	1062	1847	2816	3648	4110	4432	4617
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23
C_v	24	330	989	1895	3296	5029	6509	7333	7909	8239
K_v		285	855	1639	2851	4347	5630	6343	6841	7127
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.79	0.81	0.8	0.75	0.69	0.61	0.56	0.53	0.52
X_T		0.52	0.55	0.54	0.47	0.39	0.31	0.26	0.24	0.23

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

Catalog 12

October 2008 - Page A11-5

CL1500
Reverse Flow

CL1500										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	10	44	147	265	420	553	649	700	730	737
K_v		38	127	229	363	478	561	606	631	638
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23
C_v	12	76	153	456	722	950	1115	1204	1254	1267
K_v		66	132	394	625	822	964	1041	1085	1096
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23
C_v	14	83	275	495	784	1032	1211	1307	1362	1376
K_v		72	238	428	678	893	1048	1131	1178	1190
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23
C_v	16	109	363	653	1033	1360	1595	1722	1795	1813
K_v		94	314	565	894	1176	1380	1490	1553	1568
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23
C_v	18	166	554	997	1579	2077	2438	2631	2742	2770
K_v		144	479	862	1366	1797	2109	2276	2372	2396
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23
C_v	20	203	677	1219	1931	2540	2981	3218	3353	3387
K_v		176	586	1054	1670	2197	2579	2784	2900	2930
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.7
F_L		0.8	0.81	0.76	0.7	0.63	0.57	0.54	0.52	0.52
X_T		0.54	0.55	0.49	0.41	0.34	0.27	0.24	0.23	0.23



CL600/300, CL900/300, and CL1500/300										
Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	3	6	14	29	50	77	111	143	167	188
K_v		5	12	25	43	67	96	124	144	163
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	4	12	30	63	107	166	238	307	360	404
K_v		10	26	54	93	144	206	266	311	349
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	6	32	81	167	285	441	635	818	958	1076
K_v		28	70	144	247	381	549	708	829	931
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	8	40	100	206	352	545	784	1010	1183	1329
K_v		35	87	178	304	471	678	874	1023	1150
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	10	71	178	367	628	971	1398	1800	2108	2369
K_v		61	154	317	543	840	1209	1557	1823	2049
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	12	110	276	571	975	1509	2172	2798	3276	3681
K_v		95	239	494	843	1305	1879	2420	2834	3184
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	14	136	341	704	1204	1863	2682	3454	4045	4545
K_v		118	295	609	1041	1611	2320	2988	3499	3931
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	16	169	422	873	1492	2309	3323	4280	5012	5632
K_v		146	365	755	1291	1997	2874	3702	4335	4872
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	18	247	617	1276	2181	3374	4856	6255	7325	8230
K_v		214	534	1104	1887	2919	4200	5411	6336	7119
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

Catalog 12

October 2008 - Page A11-7

CL600/300, CL900/300, and CL1500/300
Reverse Flow**CL600/300, CL900/300, and CL1500/300**

Coefficients	Valve Size, NPS	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	20	286	714	1477	2524	3906	5620	7240	8478	9526
K_v		247	618	1278	2183	3379	4861	6263	7333	8240
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C_v	24	375	938	1939	3315	5130	7381	9508	11135	12511
K_v		324	811	1677	2867	4437	6385	8224	9632	10822
F_d		0.09	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F_L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X_T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23



This page intentionally left blank

Class 150										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	14	95	316	695	1200	1900	2840	3980	5120	6320
K _v		82.2	273	601	1038	1643	2457	3443	4429	5467
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	16	129	430	946	1640	2580	3870	5420	6970	8600
K _v		112	372	818	1419	2232	3348	4688	6029	7439
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.51	0.51	0.45	0.39	0.30	0.23
C _v	18	166	553	1220	2100	3320	4970	6960	8950	11,050
K _v		144	478	1055	1817	2872	4299	6020	7742	9558
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	20	208	692	1520	2630	4160	6230	8730	11,220	13,850
K _v		180	599	1315	2275	3598	5389	7551	9705	11,980
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	24	322	1080	2370	4080	6450	9670	13,540	17,410	21,500
K _v		277	934	2050	3529	5579	8365	11,712	15,060	18,598
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23



Type A31A

Class 300
Reverse Flow

Catalog 12
August 2002 - Page A31A-2

Class 300										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	14	136	341	704	1200	1860	2680	3450	4050	4550
K _v		118	295	609	1038	1609	2318	2984	3503	3936
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	16	169	422	873	1490	2310	3320	4280	5010	5630
K _v		146	365	755	1289	1998	2872	3702	4334	4870
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	18	247	617	1280	2180	3370	4860	6260	7330	8230
K _v		214	534	1107	1886	2915	4204	5415	6340	7119
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	20	286	714	1480	2520	3910	5620	7240	8480	9530
K _v		247	618	1280	2180	3382	4861	6263	7335	8243
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	24	375	938	1940	3320	5130	7380	9510	11,140	12,510
K _v		324	811	1678	2872	4437	6384	8226	9636	10,821
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23

Fisher is a mark owned by Fisher Controls International, Inc., a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International, Inc. 1998, 2002; All Rights Reserved Printed in USA



Class 150, Reverse Flow, 3 through 18-Inch

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	3	6	14	29	50	77	111	143	167	188
K _v		5.19	12.1	25.1	43.3	66.6	96.0	124	144	163
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	4	12	30	63	107	165	238	307	359	404
K _v		10.4	26.0	54.5	92.6	143	206	266	311	349
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	6	32	81	167	285	441	635	818	957	1080
K _v		27.7	70.1	144	247	381	549	708	828	934
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	8	34	113	248	429	677	1020	1420	1830	2260
K _v		29.4	97.7	215	371	586	882	1228	1583	1955
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	10	47	159	349	604	953	1430	2000	2580	3180
K _v		40.7	138	302	522	824	1237	1730	2232	2751
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	12	74	247	543	939	1480	2220	3110	4000	4940
K _v		64.0	214	470	812	1280	1920	2690	3460	4273
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	14	95	316	695	1200	1900	2840	3980	5120	6320
K _v		82.2	273	601	1038	1643	2457	3443	4429	5467
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	16	129	430	946	1640	2580	3870	5420	6970	8600
K _v		112	372	818	1419	2232	3348	4688	6029	7439
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	18	166	553	1220	2100	3320	4970	6960	8950	11,050
K _v		144	478	1055	1817	2872	4299	6020	7742	9558
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23



Type A31A Cryogenic

Class 150
Reverse Flow

Catalog 12

November 2002 - Page A31A Cryogenic-2

Class 150, Reverse Flow, 20 and 24-Inch										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	20	208	692	1520	2630	4160	6230	8730	11,220	13,850
K _v		180	599	1315	2275	3598	5389	7551	9705	11,980
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23
C _v	24	322	1080	2370	4080	6450	9670	13,540	17,410	21,500
K _v		277	934	2050	3529	5579	8365	11,712	15,060	18,598
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.77	0.79	0.81	0.81	0.78	0.73	0.68	0.60	0.52
X _T		0.50	0.53	0.55	0.55	0.51	0.45	0.39	0.30	0.23

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2002; All Rights Reserved Printed in USA



Class 300, Reverse Flow, 3 through 18-Inch

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	3	6	14	29	50	77	111	143	167	188
K _v		5.19	12.1	25.1	43.3	66.6	96.0	124	144	163
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	4	12	30	63	107	165	238	307	359	404
K _v		10.4	26.0	54.5	92.6	143	206	266	311	349
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	6	32	81	167	285	441	635	818	957	1080
K _v		27.7	70.1	144	247	381	549	708	828	934
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	8	40	100	206	352	545	784	1010	1180	1330
K _v		34.6	86.5	178	304	471	677	874	1020	1150
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	10	71	178	367	628	971	1400	1800	2110	2370
K _v		61.4	154	317	543	840	1211	1557	1825	2050
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	12	110	276	570	975	1510	2170	2800	3280	3680
K _v		95.2	239	493	843	1306	1877	2422	2837	3183
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	14	136	341	704	1200	1860	2680	3450	4050	4550
K _v		118	295	609	1038	1609	2318	2984	3503	3936
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	16	169	422	873	1490	2310	3320	4280	5010	5630
K _v		146	365	755	1289	1998	2872	3702	4334	4870
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.47	0.40	0.33	0.26	0.26	0.23
C _v	18	247	617	1280	2180	3370	4860	6260	7330	8230
K _v		214	534	1107	1886	2915	4204	5415	6340	7119
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23



Type A31A Cryogenic

Class 300
Reverse Flow

Catalog 12

November 2002 - Page A31A Cryogenic-4

Class 300, Reverse Flow, 20 and 24-Inch										
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _v	20	286	714	1480	2520	3910	5620	7240	8480	9530
K _v		247	618	1280	2180	3382	4861	6263	7335	8243
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23
C _v	24	375	938	1940	3320	5130	7380	9510	11,140	12,500
K _v		324	811	1678	2872	4437	6384	8226	9636	10,821
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
F _L		0.78	0.81	0.81	0.79	0.75	0.69	0.62	0.56	0.52
X _T		0.51	0.55	0.55	0.53	0.47	0.40	0.33	0.26	0.23

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2002; All Rights Reserved Printed in USA



The Type A31D flow coefficients are identical to the Type 8532. For sizes 14- through 24-inch A31D flow coefficients, refer to the Type 8532 information.

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	3	6	14	29	50	77	111	143	167	188
K _V		5.19	12.1	25.1	43.3	66.6	96.0	124	144	163
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	4	12	30	63	107	165	238	307	359	404
K _V		10.4	26.0	54.5	92.6	143	206	266	311	349
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	6	32	81	167	285	441	635	818	957	1080
K _V		27.7	70.1	144	247	381	549	708	828	934
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	8	34	113	248	429	677	1020	1420	1830	2260
K _V		29.4	97.7	215	371	586	882	1228	1583	1955
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	10	47	159	349	604	953	1430	2000	2580	3180
K _V		40.7	138	302	522	824	1237	1730	2232	2751
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	12	74	247	543	939	1480	2220	3110	4000	4940
K _V		64.0	214	470	812	1280	1920	2690	3460	4273
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23

Type A31D

Class 300 Reverse Flow

The Type A31D flow coefficients are identical to the Type 8532. For sizes 14- through 24-inch A31D flow coefficients, refer to the Type 8532 information.

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	3	6	14	29	50	77	111	143	167	188
K _V		5.19	12.1	25.1	43.3	66.6	96.0	124	144	163
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	4	12	30	63	107	165	238	307	359	404
K _V		10.4	26.0	54.5	92.6	143	206	266	311	349
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	6	32	81	167	285	441	635	818	957	1080
K _V		27.7	70.1	144	247	381	549	708	828	934
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	8	40	100	206	352	545	783	1010	1180	1330
K _V		34.6	86.5	178	304	471	677	874	1020	1150
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	10	71	178	367	628	971	1400	1800	2110	2370
K _V		61.4	154	317	543	840	1211	1557	1825	2050
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23
C _V	12	110	276	570	975	1510	2170	2800	3280	3680
K _V		95.2	239	493	843	1306	1877	2422	2837	3183
F _L		---	.81	.81	.79	.75	.69	.62	.56	.52
X _T		.51	.55	.55	.47	.40	.33	.26	.26	.23

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								Valve Rotation, Degrees
		10	20	30	40	50	60	70	80	
C _V	2 ⁽¹⁾	2.25	11.4	19.9	32.6	48.1	58.9	64.0	69.8	80.2
K _V		1.95	9.86	17.2	28.2	41.6	50.9	55.4	60.4	69.4
F _L		---	0.78	0.77	0.76	0.74	0.76	0.77	0.76	0.71
X _T		0.295	0.289	0.315	0.314	0.357	0.497	0.540	0.518	0.442
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	3	3.21	20.8	40.5	66.7	90.1	115	150	189	237
K _V		2.78	18.0	35.0	57.7	77.9	99.5	130	163	205
F _L		0.78	0.89	0.80	0.75	0.68	0.71	0.65	0.61	0.58
X _T		0.855	0.602	0.461	0.404	0.372	0.358	0.306	0.259	0.232
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	18.2	52.6	96.7	154	199	270	351	447	499
K _V		15.7	45.5	83.6	133	172	234	304	387	432
F _L		0.80	0.85	0.79	0.73	0.74	0.69	0.64	0.61	0.53
X _T		0.474	0.474	0.500	0.416	0.407	0.326	0.271	0.220	0.196
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	34.7	109	198	321	452	664	882	1180	1250
K _V		30.0	94.3	171	278	391	574	763	1020	1080
F _L		0.85	0.83	0.75	0.71	0.71	0.67	0.65	0.61	0.55
X _T		0.389	0.552	0.528	0.438	0.424	0.331	0.278	0.206	0.203
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	60.5	190	345	560	788	1160	1540	2060	2180
K _V		52.3	164	298	484	682	1000	1330	1780	1890
F _L		0.81	0.81	0.79	0.82	0.71	0.66	0.60	0.55	0.48
X _T		0.368	0.520	0.498	0.412	0.399	0.310	0.261	0.193	0.191
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	83.3	259	463	727	1090	1670	2400	3340	3600
K _V		72.1	224	400	629	943	1440	2080	2890	3110
F _L		0.81	0.81	0.79	0.82	0.71	0.66	0.60	0.55	0.48
X _T		0.626	0.658	0.646	0.622	0.538	0.381	0.285	0.201	0.167
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	125	388	694	1090	1640	2500	3600	5010	5400
K _V		108	336	600	943	1420	2160	3110	4330	4670
F _L		0.83	0.78	0.78	0.78	0.75	0.66	0.61	0.52	0.47
X _T		0.528	0.556	0.547	0.528	0.451	0.324	0.241	0.170	0.141
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Type A41

Class 150 Reverse Flow

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.11	9.96	20.7	34.0	50.5	68.4	81.0	81.0	81.0
K _V		1.83	8.62	17.9	29.4	43.7	59.2	70.0	70.0	70.0
F _L		- - -	0.88	0.84	0.77	0.71	0.69	0.67	0.71	0.69
X _T		0.399	0.507	0.354	0.334	0.340	0.342	0.359	0.401	0.401
F _d		0.090	0.17	0.26	.034	0.42	0.49	0.57	0.64	0.70
C _V	3	1.79	23.0	37.0	58.8	91.9	139	192	270	259
K _V		1.55	19.9	32.0	50.9	79.5	120	166	234	224
F _L		0.70	0.81	0.73	0.76	0.75	0.66	0.60	0.50	0.54
X _T		0.449	0.455	0.395	0.417	0.423	0.313	0.256	0.188	0.203
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	17.2	50.2	87.8	146	206	285	365	465	521
K _V		14.9	43.4	75.9	126	178	247	316	402	451
F _L		0.72	0.84	0.79	0.75	0.71	0.63	0.58	0.53	0.55
X _T		0.445	0.471	0.481	0.417	0.370	0.276	0.225	0.191	0.196
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	30.6	100	173	285	424	640	893	1180	1290
K _V		26.5	86.5	150	247	367	554	772	1020	1120
F _L		0.83	0.83	0.80	0.78	0.76	0.69	0.59	0.52	0.54
X _T		0.444	0.608	0.574	0.485	0.441	0.316	0.227	0.176	0.182
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	53.6	175	303	499	743	1120	1560	2070	2260
K _V		46.4	151	262	432	643	969	1350	1790	1950
F _L		0.79	0.83	0.82	0.79	0.73	0.66	0.58	0.51	0.48
X _T		0.413	0.567	0.534	0.449	0.409	0.295	0.213	0.164	0.170
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	84.4	232	423	737	1180	1730	2560	3250	3710
K _V		73.0	200	366	638	1020	1500	2210	2810	3210
F _L		0.79	0.83	0.82	0.79	0.73	0.66	0.58	0.51	0.48
X _T		0.542	0.745	0.673	0.590	0.489	0.380	0.245	0.189	0.156
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	126	347	631	1100	1760	2590	3820	4850	5540
K _V		109	300	546	95.2	1520	2240	3300	4200	4790
F _L		0.78	0.87	0.85	0.80	0.75	0.69	0.55	0.51	0.47
X _T		0.491	0.671	0.610	0.535	0.443	0.343	0.222	0.171	0.141
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Catalog 12

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.25	11.4	19.9	32.6	48.1	58.9	64.0	69.8	80.2
K _V		1.95	9.86	17.2	28.2	41.6	50.9	55.4	60.4	69.4
F _L		- - -	0.78	0.77	0.75	0.74	0.75	0.77	0.75	0.71
X _T		0.299	0.292	0.319	0.318	0.362	0.502	0.546	0.525	0.446
F _d		0.090	0.17	0.26	.034	0.42	0.49	0.57	0.64	0.70
C _V	3	3.21	20.8	40.5	66.7	90.1	115	150	189	237
K _V		2.78	18.0	35.0	57.7	77.9	99.5	130	163	205
F _L		0.78	0.88	0.78	0.77	0.79	0.80	0.72	0.69	0.64
X _T		0.370	0.542	0.433	0.411	0.464	0.469	0.397	0.346	0.286
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	12.9	37.4	72.9	124	174	236	318	420	488
K _V		11.2	32.4	63.1	107	151	204	275	363	422
F _L		0.81	0.86	0.79	0.73	0.72	0.71	0.65	0.60	0.54
X _T		0.455	0.499	0.416	0.395	0.410	0.363	0.292	0.235	0.210
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	39.6	120	215	340	440	598	777	1050	1100
K _V		34.3	104	186	294	381	604	672	908	952
F _L		0.80	0.77	0.71	0.68	0.71	0.68	0.62	0.60	0.56
X _T		0.420	0.433	0.434	0.369	0.360	0.299	0.282	0.214	0.205
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	73.9	224	401	634	821	1120	1450	1960	2070
K _V		63.9	194	347	548	710	969	1250	1700	1790
F _L		0.80	0.79	0.77	0.75	0.71	0.66	0.61	0.55	0.49
X _T		0.367	0.380	0.381	0.322	0.314	0.260	0.248	0.187	0.177
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	64.6	248	453	706	1070	1630	2340	3280	3480
K _V		55.9	215	392	611	926	1410	2020	2840	3010
F _L		0.80	0.79	0.77	0.75	0.71	0.66	0.61	0.55	0.49
X _T		0.464	0.565	0.562	0.544	0.455	0.335	0.255	0.179	0.159
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	95.2	365	668	1040	1580	2410	3450	4840	5130
K _V		82.3	316	578	900	1370	2080	2980	4190	4440
F _L		0.86	0.80	0.78	0.79	0.74	0.67	0.59	0.53	0.48
X _T		0.422	0.514	0.506	0.492	0.412	0.301	0.231	0.162	0.144
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Type A41

Class 300 Reverse Flow

Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	2 ⁽¹⁾	2.11	9.96	20.7	34.0	50.5	68.4	81.0	81.0	81.0
K _V		1.83	8.62	17.9	29.4	43.7	59.2	70.0	70.0	70.0
F _L		- - -	0.88	0.84	0.77	0.71	0.69	0.67	0.71	0.69
X _T		0.399	0.507	0.354	0.334	0.340	0.342	0.359	0.401	0.401
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	3	1.79	23.0	37.0	58.8	91.9	139	192	270	259
K _V		1.55	19.9	32.0	50.9	79.5	120	166	234	224
F _L		0.71	0.75	0.77	0.81	0.79	0.71	0.62	0.49	0.59
X _T		0.370	0.542	0.433	0.411	0.464	0.469	0.397	0.346	0.286
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	4	12.7	35.2	61.3	105	163	242	361	463	482
K _V		11.0	30.4	53.0	90.8	141	209	312	400	417
F _L		0.74	0.80	0.82	0.80	0.77	0.69	0.57	0.51	0.55
X _T		0.455	0.499	0.416	0.395	0.410	0.363	0.292	0.235	0.210
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	6	38.8	106	183	294	436	605	779	976	1100
K _V		33.6	91.7	158	254	377	523	674	844	952
F _L		0.78	0.81	0.79	0.80	0.74	0.68	0.59	0.58	0.57
X _T		0.420	0.433	0.434	0.369	0.360	0.299	0.282	0.214	0.205
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	8	73.1	200	345	554	821	1140	1470	1840	2090
K _V		63.2	173	298	479	710	986	1270	1590	1810
F _L		0.80	0.83	0.83	0.80	0.74	0.66	0.58	0.50	0.48
X _T		0.405	0.454	0.542	0.451	0.346	0.269	0.239	0.206	0.173
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	10	66.2	217	399	708	1110	1690	2400	3100	3560
K _V		57.3	188	345	612	960	1460	2080	2680	3080
F _L		0.80	0.83	0.83	0.80	0.74	0.66	0.58	0.50	0.48
X _T		0.505	0.714	0.672	0.557	0.465	0.339	0.243	0.187	0.155
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70
C _V	12	100	328	603	1070	1680	2550	3620	4690	5380
K _V		86.5	284	522	926	1450	2210	3130	4060	4650
F _L		0.80	0.86	0.87	0.80	0.75	0.66	0.55	0.50	0.48
X _T		0.451	0.636	0.595	0.494	0.414	0.303	0.217	0.167	0.138
F _d		0.090	0.17	0.26	0.34	0.42	0.49	0.57	0.64	0.70

1. The 2-inch size is multirated to Classes 150, 300 and 600.

Catalog 12

A81 Valve
PN 10 through PN 40, CL150 and CL300

Catalog 12
 January 2009 - Page A81-1

Approximately Linear Disk
 Forward Flow

PN 10 through PN 40, CL150 and CL300											Approximately Linear Characteristic
Valve Size		Coefficients	Valve Rotation, Degrees								
DN	NPS		10	20	30	40	50	60	70	80	90
50	2	C _v	2.28	7.7	21.5	35.5	51	58.9	62.4	78.3	83.7
		K _v	1.97	6.7	18.6	30.7	44.1	50.9	53.9	67.7	72.3
		F _d	0.16	0.21	0.21	0.25	0.29	0.32	0.36	0.37	0.39
		F _L	---	0.91	0.84	0.76	0.73	0.78	0.80	0.68	0.66
		X _T	---	0.76	0.53	0.39	0.39	0.52	0.54	0.39	0.35
80	3	C _v	3.50	22.1	46.3	73.1	120	147	181	239	275
		K _v	3.02	19.1	40.0	63.2	103.7	127	156	206	238
		F _d	0.10	0.17	0.23	0.27	0.32	0.33	0.41	0.47	0.51
		F _L	0.77	0.81	0.79	0.79	0.69	0.70	0.67	0.62	0.58
		X _T	0.46	0.60	0.54	0.55	0.40	0.37	0.35	0.29	0.23
100	4	C _v	9.40	48.8	90.6	137	171	224	297	397	484
		K _v	8.12	42.2	78.3	118	148	194	257	343	418
		F _d	0.10	0.18	0.23	0.28	0.33	0.38	0.43	0.50	0.53
		F _L	0.9	0.83	0.80	0.77	0.77	0.74	0.68	0.62	0.58
		X _T	0.48	0.47	0.48	0.48	0.46	0.39	0.32	0.26	0.22
150	6	C _v	26.2	99.1	181	283	401	543	717	951	1000
		K _v	22.6	85.6	156	245	346	469	619	822	864
		F _d	0.10	0.18	0.26	0.31	0.36	0.40	0.43	0.47	0.49
		F _L	0.82	0.79	0.77	0.74	0.72	0.68	0.66	0.61	0.58
		X _T	0.44	0.48	0.52	0.48	0.42	0.36	0.32	0.26	0.22
200	8	C _v	44.6	138	285	457	698	994	1390	2190	2550
		K _v	38.5	119	246	395	603	859	1201	1892	2203
		F _d	0.13	0.20	0.25	0.31	0.37	0.43	0.47	0.51	0.55
		F _L	0.86	0.94	0.82	0.71	0.68	0.67	0.61	0.54	0.47
		X _T	0.49	0.43	0.54	0.52	0.45	0.36	0.31	0.18	0.14
250	10	C _v	72.0	225	423	729	1150	1720	2440	3370	3720
		K _v	62.2	194	365	630	994	1486	2108	2912	3214
		F _d	0.12	0.18	0.23	0.26	0.36	0.41	0.45	0.57	0.54
		F _L	0.89	0.78	0.82	0.75	0.70	0.66	0.60	0.55	0.50
		X _T	0.53	0.42	0.57	0.49	0.41	0.32	0.23	0.18	0.16
300	12	C _v	128	401	733	1220	1800	2490	3380	4470	5080
		K _v	111	346	633	1054	1555	2151	2920	3862	4389
		F _d	0.13	0.19	0.25	0.31	0.38	0.44	0.47	0.50	0.53
		F _L	0.83	0.73	0.74	0.70	0.69	0.66	0.61	0.51	0.50
		X _T	0.41	0.34	0.46	0.42	0.36	0.30	0.24	0.18	0.16



A81 Valve
PN 10 through PN 40, CL150 and CL300

Approximately Linear Disk
Forward Flow

Catalog 12
January 2009 - Page A81-2

This page intentionally left blank

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2009; All Rights Reserved Printed in USA




A three-way butterfly valve consists of two standard butterfly valves mounted on a pipe tee. The valves are operated by a single actuator through a tandem linkage. The linkage is normally arranged so that one of the valves is opening while the other is closing. For additional three-way butterfly valve information, refer to Bulletin 51.4:020.

When sizing a three-way butterfly valve, the relationship between valve disc rotation and flow must be kept in mind. With butterfly valves, this relationship is equal percentage and not linear. Due to this relationship, at mid-travel of the valve disc, flow capacity is less than one-half total valve capacity. With a three-way butterfly valve, one valve is opening while the other valve is closing, and both valves are midway through total disc rotation of 60 or 90 degrees when the actuator is at mid-travel. The combined capacity of the two valves at mid-travel is less than wide-open capacity of one valve.

If each valve is sized to handle maximum pipe tee flow at full disc rotation, combined capacity of the two valves at mid-travel will be lower than the flow capacity of the tee. Although this reduction is present at all points of travel, it is most significant at mid-travel. This is illustrated in figures 1 and 2 for conventional discs. For **Fishtail**® discs, one-half of total valve capacity is reached at an even larger angle of disc rotation, and the reduction in combined capacity at mid-travel is greater than it is with conventional discs.


For flow-switching (on/off) applications, this is not serious since the valves will be at mid-travel only momentarily while the valves are being stroked open and closed.

For throttling applications, it is possible that the valves will remain at mid-travel for significant periods of time. In these applications, the capacity reduction could cause system

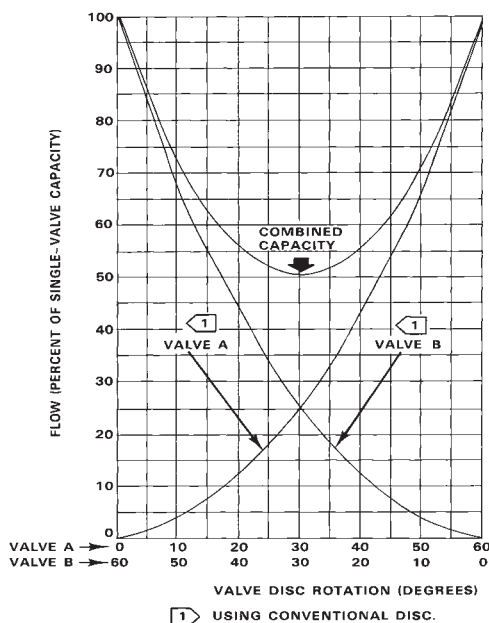

A1884-1

Figure 1. Three-Way Valve Capacity with Single Actuator—60-Degree Maximum Valve Disc Rotation

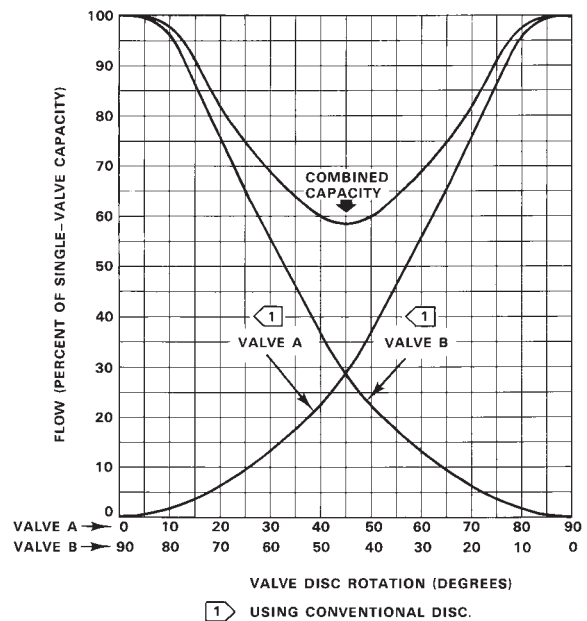

A1885-1

Figure 2. Three-Way Valve Capacity with Single Actuator—90-Degree Maximum Valve Disc Rotation

Fisher, Fishtail, and Fisher-Rosemount are marks owned by Fisher Controls International, Inc. or Fisher-Rosemount Systems, Inc. All other marks are the property of their respective owners.

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1998;
All Rights Reserved



Three-Way Butterfly Valve Sizing

problems such as compressor surging. To avoid these problems, size each valve to carry one-half of the maximum pipe tee flow at mid-travel. Then, the combined flow capacity of the two valves at mid-travel will equal maximum flow.

If it is not desirable to do this, operate each valve with a separate actuator and valve positioner. Use one direct-acting and one reverse-acting positioner and adjust the positioners for split-range operation. With this arrangement, a single input signal will open one valve while closing the other. Since split-range operation is being used, the positioners can be adjusted such that the mid-travel position of the disc is reached before the input signal reaches mid-range. Then at mid-range of the input signal, each valve can be at one-half of total capacity, rather than at one-half of total disc rotation. A typical example is shown in figure 3. Although figure 3 illustrates the use of piston actuators with Type 3570 positioners, a similar arrangement can be made with any actuator and positioner type. Contact the Fisher representative for sizing assistance if dual actuation with split-range positioners is desired.

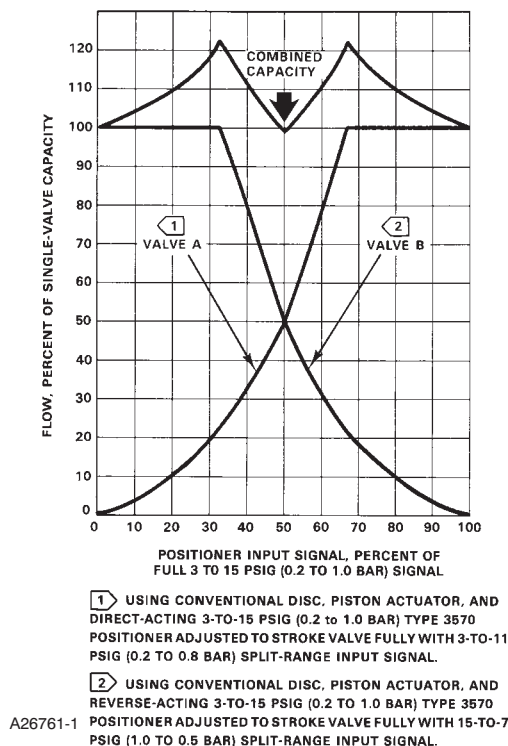


Figure 3. Three-Way Valve Capacity with Dual Actuators—60-Degree Maximum Valve Disc Rotation

Catalog 12

June 2012 - Page CAV4-1

Cavitrol™ IV Trim

CL2500 (Flow Down)																	Pure Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum ⁽¹⁾	Valve Opening—Percent of Total Travel											F _L ⁽²⁾
	mm	Inch	mm	Inch			10	20	30	40	50	60	70	80	90	100		
2	38.1	1.5	38.1	1.5	C _V	0.46	0.52	1.49	2.55	3.50	4.53	5.40	6.25	7.00	7.67	8.25	0.99	
					K _V	0.40	0.45	1.29	2.21	3.03	3.92	4.67	5.41	6.06	6.64	7.14	---	
3	55.6	2.1875	51	2	C _V	0.65	0.5	2.2	3.9	5.5	7.2	8.7	10.3	11.8	13.3	14.6	0.99	
					K _V	0.56	0.4	1.9	3.4	4.8	6.2	7.5	8.9	10.2	11.5	12.6	---	
4	69.9	2.75	63.5	2.5	C _V	0.81	2.15	4.42	6.75	9.04	11.3	13.6	15.8	18.0	20.0	21.9	0.99	
					K _V	0.70	1.86	3.82	5.84	7.82	9.78	11.8	13.7	15.6	17.3	18.9	---	
6	111	4.375	101	4	C _V	1.30	4.45	10.9	17.4	23.4	29.2	35.0	40.7	46.1	50.9	55.6	0.99	
					K _V	1.13	3.95	9.43	15.1	20.2	25.3	30.3	35.2	39.9	44.0	48.1	---	
CL2500 (Flow Down)																	Approximately Linear Characteristic	
						10	20	30	40	50	60	70	80	90	100	F _L ⁽²⁾		
2	38.1	1.5	38.1	1.5	C _V	0.46	0.31	1.11	2.12	3.44	5.02	6.55	7.99	9.35	10.6	11.3	0.99	
					K _V	0.40	0.27	0.96	1.83	2.98	4.34	5.67	6.91	8.09	9.17	9.78	---	
3	55.6	2.1875	51	2	C _V	0.65	0.5	2.2	3.9	5.6	7.2	9.7	12.9	16.7	20.7	24.0	0.99	
					K _V	0.56	0.4	1.9	3.4	4.8	6.2	8.4	11.2	14.4	17.9	20.8	---	
4	69.9	2.75	63.5	2.5	C _V	0.81	2.33	4.89	7.49	10.6	14.6	19.6	25.5	31.3	35.8	38.2	0.99	
					K _V	0.07	2.02	4.23	6.48	9.17	12.6	17.0	22.1	27.1	31.0	33.0	---	
6	111	4.375	101	4	C _V	1.30	3.90	10.1	16.9	24.1	33.4	45.2	58.4	71.0	82.1	89.1	0.99	
					K _V	1.13	3.37	8.74	14.6	20.8	28.9	39.1	50.5	61.4	71.0	77.1	---	

1. The ability of Cavitrol IV trim to prevent cavitation noise and damage is diminished when throttling for long times at C_Vs less than these minimums.

2. At 100% travel.

This page is intentionally left blank.

Control-Disk™ Valve

PN 10 through PN 40, CL150 and CL300

Catalog 12

April 2013 - Page Control-Disk-1

Equal Percentage Characterized Disk
Forward Flow

PN 10 through PN 40, CL150 and CL300											Equal Percentage Characteristic
Valve Size		Coefficients	Valve Rotation, Degrees								
DN	NPS		10	20	30	40	50	60	70	80	90
50	2	C _v	1.52	5.20	9.68	13.2	19.8	25.2	33.1	44.5	60.7
		K _v	1.31	4.49	8.36	11.4	17.1	21.8	28.6	38.4	52.4
		F _d	0.14	0.10	0.13	0.14	0.19	0.21	0.25	0.27	0.33
		F _L	---	0.78	0.77	0.75	0.74	0.75	0.77	0.75	0.71
		X _T	0.30	0.29	0.32	0.32	0.36	0.50	0.54	0.52	0.44
80	3	C _v	4.60	11.0	17.0	28.3	48.4	71.6	107	162	227
		K _v	3.97	9.50	14.7	24.5	41.8	61.9	92.4	140	196
		F _d	0.09	0.11	0.12	0.16	0.21	0.27	0.34	0.46	0.52
		F _L	0.67	0.73	0.65	0.73	0.76	0.76	0.74	0.70	0.66
		X _T	0.41	0.44	0.39	0.47	0.51	0.50	0.53	0.45	0.31
100	4	C _v	9.99	25.3	33.5	51.4	79.4	124	190	282	391
		K _v	8.63	21.9	28.9	44.4	68.6	107	164	244	338
		F _d	0.09	0.11	0.12	0.16	0.21	0.28	0.35	0.43	0.49
		F _L	0.85	0.86	0.82	0.80	0.78	0.75	0.73	0.68	0.60
		X _T	0.50	0.46	0.45	0.45	0.43	0.41	0.36	0.30	0.27
150	6	C _v	25.8	61.0	86.6	134	207	320	509	749	883
		K _v	22.3	52.7	74.8	116	179	276	440	647	763
		F _d	0.10	0.12	0.13	0.18	0.25	0.32	0.39	0.45	0.50
		F _L	0.76	0.76	0.70	0.70	0.74	0.74	0.68	0.64	0.59
		X _T	0.71	0.42	0.38	0.40	0.45	0.46	0.38	0.31	0.24
200	8	C _v	56.8	104	147	214	361	589	906	1390	1930
		K _v	49.1	89.9	127	185	312	509	783	1201	1668
		F _d	0.11	0.11	0.13	0.19	0.26	0.33	0.39	0.46	0.54
		F _L	0.8	0.76	0.71	0.77	0.76	0.74	0.71	0.63	0.56
		X _T	0.30	0.35	0.32	0.41	0.39	0.46	0.38	0.32	0.21
250	10	C _v	76.0	183	275	409	669	1070	1650	2540	3270
		K _v	65.7	158	238	353	578	924	1426	2195	2825
		F _d	0.11	0.13	0.16	0.22	0.29	0.35	0.41	0.48	0.55
		F _L	0.81	0.75	0.71	0.80	0.79	0.73	0.67	0.61	0.54
		X _T	0.44	0.41	0.37	0.45	0.45	0.39	0.34	0.25	0.19
300	12	C _v	108	188	272	515	925	1450	2230	3080	4530
		K _v	93.3	162	235	445	799	1253	1927	2661	3914
		F _d	0.09	0.11	0.14	0.21	0.28	0.34	0.40	0.47	0.54
		F _L	0.77	0.71	0.78	0.80	0.78	0.74	0.68	0.68	0.54
		X _T	0.26	0.37	0.48	0.47	0.45	0.47	0.37	0.34	0.19



Control-Disk™ Valve

NPS 14-36, CL150

Catalog 12

Reverse Flow

April 2013 - Page Control-Disk-2

NPS 14 through 36, CL150										Equal Percentage Characteristic
Valve Size	Coefficients	Valve Rotation, Degrees								
NPS		10	20	30	40	50	60	70	80	90
14	C _v	175	260	370	600	1030	1750	2860	4420	6540
	K _v	151	225	320	518	890	1512	2471	3819	5651
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.17	0.17	0.40	0.56	0.54	0.43	0.33	0.25	0.19
	F _d	0.08	0.10	0.12	0.18	0.24	0.31	0.39	0.47	0.55
16	C _v	275	425	580	875	1430	2380	3860	5990	8900
	K _v	238	367	501	756	1236	2056	3335	5175	7690
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.17	0.15	0.33	0.50	0.51	0.41	0.32	0.24	0.18
	F _d	0.09	0.11	0.14	0.19	0.25	0.32	0.39	0.47	0.55
18	C _v	410	630	840	1210	1900	3090	4950	7640	11340
	K _v	354	544	726	1045	1642	2670	4277	6601	9798
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.08	0.07	0.16	0.26	0.29	0.25	0.19	0.15	0.11
	F _d	0.09	0.13	0.15	0.20	0.26	0.32	0.39	0.47	0.55
20	C _v	515	785	1060	1530	2380	3800	6000	9110	13400
	K _v	445	678	916	1322	2056	3283	5184	7871	11578
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.18	0.21	0.40	0.56	0.56	0.46	0.35	0.26	0.20
	F _d	0.09	0.12	0.15	0.20	0.26	0.33	0.40	0.48	0.55
24	C _v	520	975	1280	1810	2970	5150	8730	14100	21600
	K _v	449	842	1106	1564	2566	4450	7543	12182	18662
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.19	0.07	0.22	0.48	0.56	0.46	0.34	0.25	0.18
	F _d	0.07	0.09	0.11	0.16	0.23	0.30	0.38	0.46	0.54
30	C _v	1840	2530	3010	4000	6050	10000	16400	26000	39300
	K _v	1590	2186	2601	3456	5227	8640	14170	22464	33955
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.14	0.14	0.30	0.50	0.52	0.41	0.29	0.21	0.15
	F _d	0.10	0.13	0.17	0.22	0.28	0.34	0.41	0.49	0.56
36	C _v	2410	3550	4310	5750	8890	14800	24500	39100	59500
	K _v	2082	3067	3724	4968	7681	12787	21168	33782	51408
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.13	0.15	0.34	0.55	0.56	0.42	0.29	0.20	0.14
	F _d	0.10	0.13	0.17	0.22	0.28	0.34	0.42	0.50	0.56

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Control-Disk are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2013 Fisher Controls International LLC. All rights reserved



Catalog 12

April 2013 - Page Control-Disk-3

Reverse Flow

NPS 14 through 36, CL300										Equal Percentage Characteristic
Valve Size	Coefficients	Valve Rotation, Degrees								
NPS		10	20	30	40	50	60	70	80	90
14	C _v	140	200	305	500	840	1360	2120	3160	4540
	K _v	121	173	264	432	726	1175	1832	2730	3923
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.12	0.15	0.33	0.46	0.47	0.42	0.35	0.29	0.24
	F _d	0.08	0.11	0.14	0.17	0.25	0.32	0.40	0.48	0.54
16	C _v	230	365	505	720	1100	1700	2610	3910	5670
	K _v	199	315	436	622	950	1469	2255	3378	4899
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.15	0.13	0.26	0.42	0.48	0.44	0.37	0.29	0.23
	F _d	0.09	0.13	0.15	0.18	0.26	0.33	0.40	0.48	0.51
18	C _v	300	435	590	880	1420	2340	3750	5770	8510
	K _v	259	376	510	760	1227	2022	3240	4985	7353
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.10	0.12	0.29	0.47	0.49	0.41	0.32	0.24	0.19
	F _d	0.09	0.11	0.14	0.17	0.25	0.32	0.39	0.47	0.52
20	C _v	535	620	830	1270	2050	3290	5110	7600	10900
	K _v	462	536	717	1097	1771	2843	4415	6566	9418
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.14	0.25	0.44	0.53	0.48	0.39	0.30	0.23	0.19
	F _d	0.11	0.13	0.16	0.20	0.26	0.33	0.40	0.46	0.53
24	C _v	830	1000	1410	2130	3230	4800	6900	9610	13000
	K _v	717	864	1218	1840	2791	4147	5962	8303	11232
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.14	0.29	0.42	0.45	0.42	0.36	0.31	0.27	0.23
	F _d	0.12	0.14	0.16	0.20	0.28	0.34	0.41	0.48	0.53
30	C _v	1170	1940	2470	3210	4610	7120	11200	17200	25750
	K _v	1011	1676	2134	2773	3983	6152	9677	14861	22248
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.14	0.12	0.25	0.43	0.52	0.47	0.36	0.27	0.20
	F _d	0.10	0.13	0.16	0.19	0.25	0.32	0.39	0.46	0.53
36	C _v	1340	1920	2650	4060	6690	11100	17800	27400	40300
	K _v	1158	1659	2290	3508	5780	9590	15379	23674	34819
	F _L	0.75	0.71	0.77	0.74	0.78	0.75	0.72	0.65	0.60
	X _T	0.15	0.17	0.37	0.53	0.52	0.43	0.33	0.25	0.19
	F _d	0.08	0.11	0.14	0.19	0.25	0.32	0.38	0.47	0.54



This page intentionally left blank

Forward Flow										Modified Equal Percentage Characteristic
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	3	4.74	14.1	34.6	60.1	84.0	107	133	163	166
K_v		4.10	12.2	29.9	52.0	72.7	92.6	115	141	144
F_d		0.18	0.24	0.33	0.43	0.53	0.63	0.75	0.99	0.99
F_L		0.85	0.86	0.84	0.83	0.87	0.86	0.80	0.71	0.69
X_T		0.294	0.632	0.511	0.494	0.537	0.559	0.501	0.384	0.372
C_v	4	11.1	27.1	61.7	106	149	193	252	324	346
K_v		9.60	23.4	53.4	91.7	129	167	218	280	299
F_d		0.18	0.28	0.34	0.43	0.51	0.59	0.70	0.99	0.99
F_L		0.76	0.89	0.86	0.82	0.85	0.83	0.77	0.66	0.62
X_T		0.263	0.616	0.526	0.476	0.497	0.501	0.422	0.311	0.276
C_v	6	15.7	33.0	86.1	154	229	330	497	718	809
K_v		13.6	28.5	74.5	133	198	285	430	621	700
F_d		0.12	0.24	0.32	0.40	0.48	0.56	0.64	0.74	0.99
F_L		0.93	0.82	0.81	0.78	0.77	0.74	0.70	0.61	0.57
X_T		0.281	0.174	0.311	0.449	0.522	0.459	0.322	0.228	0.221
C_v	8	21.5	82.4	156	259	402	592	832	1120	1440
K_v		18.6	71.3	135	224	348	512	720	969	1250
F_d		0.11	0.19	0.27	0.35	0.45	0.49	0.55	0.62	0.99
F_L		0.83	0.80	0.83	0.83	0.80	0.75	0.72	0.62	0.58
X_T		0.126	0.432	0.624	0.620	0.529	0.429	0.342	0.273	0.221
C_v	10	41.4	162	301	455	699	995	1300	1820	2360
K_v		35.8	140	260	394	605	861	1125	1514	2041
F_d		0.14	0.23	0.30	0.38	0.45	0.53	0.60	0.68	1.00
F_L		0.72	0.77	0.84	0.87	0.82	0.75	0.74	0.63	0.54
X_T		0.273	0.384	0.473	0.487	0.369	0.302	0.284	0.219	0.152
C_v	12	60.4	215	443	699	1020	1390	1850	2560	3050
K_v		52.2	186	383	605	882	1200	1600	2210	2640
F_d		0.14	0.24	0.32	0.40	0.48	0.55	0.63	0.73	1.00
F_L		0.81	0.78	0.77	0.72	0.78	0.73	0.68	0.63	0.51
X_T		0.714	0.336	0.366	0.449	0.452	0.416	0.360	0.263	0.223

Design CV500

Reverse Flow

Reverse Flow										Modified Equal Percentage Characteristic
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	3	3.25	14.2	34.2	61.8	94.5	129	160	181	181
K _V		2.81	12.3	29.6	53.5	81.7	112	138	157	157
F _d		0.18	0.24	0.33	0.43	0.53	0.63	0.75	0.99	0.99
F _L		0.96	0.91	0.80	0.73	0.70	0.64	0.57	0.54	0.53
X _T		0.581	0.555	0.515	0.466	0.406	0.345	0.289	0.253	0.258
C _V	4	7.20	27.2	64.8	116	172	223	263	290	300
K _V		6.23	23.5	56.1	100	149	193	227	251	260
F _d		0.18	0.28	0.34	0.43	0.51	0.59	0.70	0.99	0.99
F _L		0.98	0.93	0.84	0.72	0.67	0.65	0.63	0.62	0.61
X _T		0.436	0.685	0.526	0.410	0.354	0.334	0.322	0.305	0.308
C _V	6	5.20	33.3	88.5	170	268	372	476	600	808
K _V		4.50	28.8	76.6	147	232	322	412	519	699
F _d		0.12	0.24	0.32	0.40	0.48	0.56	0.64	0.74	0.99
F _L		0.69	0.80	0.84	0.80	0.72	0.67	0.63	0.60	0.49
X _T		0.668	0.620	0.544	0.459	0.403	0.366	0.339	0.294	0.198
C _V	8	8.68	61.1	156	293	463	656	856	1050	1240
K _V		7.51	52.9	135	253	400	567	740	908	1070
F _d		0.11	0.19	0.27	0.35	0.45	0.49	0.55	0.62	0.99
F _L		0.77	0.83	0.87	0.80	0.73	0.66	0.61	0.59	0.58
X _T		0.898	0.731	0.585	0.483	0.413	0.354	0.314	0.284	0.260
C _V	10	37.0	137	288	505	752	1080	1460	1710	2140
K _V		32.0	119	249	437	650	934	1260	1480	1850
F _d		0.14	0.23	0.30	0.38	0.45	0.53	0.60	0.68	1.00
F _L		0.84	0.86	0.90	0.79	0.74	0.64	0.58	0.57	0.49
X _T		0.248	0.462	0.483	0.366	0.308	0.250	0.207	0.203	0.166
C _V	12	39.0	192	411	703	1090	1560	2040	2490	3080
K _V		33.7	166	356	608	943	1350	1760	2150	2660
F _d		0.14	0.24	0.32	0.40	0.48	0.55	0.63	0.73	1.00
F _L		0.71	0.81	0.80	0.74	0.69	0.63	0.59	0.54	0.50
X _T		0.975	0.616	0.533	0.473	0.391	0.325	0.286	0.258	0.196

Catalog 12

Micro-Form™ Valve Plugs

Micro-Form - Flow Up															Equal Percentage Characteristic	
Valve Size, Inches	Port Diameter		Total Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
1	1/4	6.4	3/4	19	C _v	0.070	0.115	0.164	0.224	0.315	0.450	0.641	0.921	1.28	1.66	.87
					K _v	0.061	0.099	0.142	0.194	0.272	0.389	0.554	0.797	1.11	1.44	---
					X _T	0.783	0.783	0.744	0.691	0.625	0.614	0.608	0.611	0.610	0.611	---
					F _d	0.12	0.14	0.17	0.20	0.24	0.29	0.35	0.43	0.55	0.68	---
	3/8	9.5	3/4	19	C _v	0.155	0.260	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03	.84
					K _v	0.134	0.225	0.352	0.516	0.742	1.05	1.43	1.92	2.60	3.49	---
					X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536	---
					F _d	0.273	0.436	0.631	0.911	1.30	1.84	2.57	3.65	5.08	6.51	.84
	1/2	12.7	3/4	19	C _v	0.236	0.377	0.546	0.788	1.13	1.59	2.22	3.16	4.39	5.63	---
					K _v	0.236	0.377	0.546	0.788	1.13	1.59	2.22	3.16	4.39	5.63	---
					X _T	0.673	0.644	0.641	0.590	0.592	0.587	0.586	0.557	0.523	0.549	---
					F _d	0.11	0.13	0.16	0.19	0.23	0.27	0.33	0.40	0.48	0.56	---
	3/4	19.1	3/4	19	C _v	0.483	0.775	1.25	1.97	2.89	4.13	5.87	8.16	10.9	12.3	.92
					K _v	0.418	0.670	1.08	1.70	2.50	3.57	5.08	7.06	9.43	10.6	---
					X _T	0.571	0.599	0.527	0.473	0.492	0.519	0.537	0.505	0.486	0.628	---
					F _d	0.10	0.39	0.47	0.18	0.22	0.26	0.31	0.37	0.43	0.49	---
2	1/4	6.4	3/4	19	C _v	0.070	0.115	0.164	0.224	0.315	0.450	0.641	0.921	1.28	1.66	.87
					K _v	0.061	0.099	0.142	0.194	0.272	0.389	0.554	0.797	1.11	1.44	---
					X _T	0.783	0.783	0.744	0.691	0.625	0.614	0.608	0.611	0.610	0.611	---
					F _d	0.12	0.14	0.17	0.20	0.24	0.29	0.35	0.43	0.55	0.68	---
	3/8	9.5	3/4	19	C _v	0.155	0.260	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03	.84
					K _v	0.134	0.225	0.352	0.516	0.742	1.05	1.43	1.92	2.60	3.49	---
					X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536	---
					F _d	0.11	0.13	0.16	0.19	0.22	0.27	0.33	0.41	0.50	0.61	---
	1/2	12.7	3/4	19	C _v	0.348	0.505	0.709	0.998	1.38	1.92	2.69	3.82	5.25	6.82	.81
					K _v	0.301	0.437	0.613	0.863	1.19	1.66	2.33	3.30	4.54	5.90	---
					X _T	0.613	0.627	0.585	0.576	0.565	0.553	0.535	0.509	0.490	0.501	---
					F _d	0.11	0.13	0.16	0.19	0.23	0.27	0.33	0.40	0.48	0.56	---
	3/4	19.1	3/4	19	C _v	0.613	0.952	1.44	2.06	2.92	4.13	5.87	8.16	11.1	14.1	.81
					K _v	0.530	0.823	1.25	1.78	2.53	3.57	5.08	7.06	9.60	12.2	---
					X _T	0.581	0.616	0.581	0.586	0.581	0.573	0.549	0.541	0.529	0.528	---
					F _d	0.10	0.39	0.47	0.18	0.22	0.26	0.31	0.37	0.43	0.49	---
	1	25.4	3/4	19	C _v	1.20	1.68	2.44	3.53	5.05	7.28	10.5	14.0	18.4	23.7	.82
					K _v	1.04	1.45	2.11	3.05	4.37	6.30	9.08	12.1	15.9	20.5	---
					X _T	0.517	0.569	0.559	0.542	0.544	0.540	0.507	0.508	0.507	0.508	---
					F _d	0.11	0.12	0.15	0.18	0.21	0.25	0.30	0.35	0.41	0.46	---
	1-1/4	31.8	3/4	19	C _v	1.32	1.76	2.50	3.66	5.42	8.25	12.7	20.6	29.0	34.5	.85
					K _v	1.14	1.52	2.16	3.17	4.69	7.14	11.0	17.8	25.1	29.8	---
					X _T	0.521	0.563	0.548	0.534	0.498	0.503	0.553	0.528	0.524	0.579	---
					F _d	0.087	0.10	0.12	0.15	0.18	0.22	0.28	0.33	0.39	0.44	---

1. At 100% travel.

Design D

Micro-Flute™ Valve Plugs

Micro-Flute - Flow Up															Equal Percentage Characteristic	
Valve Size, Inches	Port Diameter		Total Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
All Sizes 1 and 2	1/4 1 Flute	6.4 1 Flute	3/4	19	C _V	0.0385	0.0455	0.0560	0.0719	0.0942	0.124	0.162	0.212	0.278	0.354	.87
					K _V	0.033	0.039	0.048	0.062	0.081	0.107	0.140	0.183	0.240	0.306	- - -
					X _T	0.778	0.734	0.690	0.653	0.642	0.635	0.637	0.634	0.632	0.656	- - -
	1/4 3 Flutes	6.4 3 Flutes	3/4	19	C _V	0.0562	0.0725	0.101	0.146	0.216	0.312	0.433	0.588	0.802	1.07	.90
					K _V	0.049	0.063	0.087	0.126	0.187	0.270	0.375	0.509	0.694	0.926	- - -
					X _T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624	- - -

1. At 100% travel.

Equal Percentage Valve Plug Flow Down

Flow Down															Equal Percentage Characteristic	
Valve Size, Inches	Port Diameter		Total Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
1	1/4	6.4	3/4	19	C _V	0.096	0.173	0.294	0.481	0.727	0.995	1.35	1.99	2.73	3.21	0.45
					K _V	0.0830	0.150	0.254	0.416	0.629	0.861	1.17	1.72	2.36	2.78	---
					X _T	0.578	0.379	0.271	0.201	0.154	0.144	0.148	0.129	0.127	0.153	---
	3/8	9.5	3/4	19	C _V	0.189	0.343	0.624	1.05	1.45	1.84	2.47	3.81	5.58	7.06	0.45
					K _V	0.164	0.297	0.540	0.908	1.25	1.59	2.14	3.30	4.83	6.11	---
					X _T	0.516	0.355	0.220	0.151	0.152	0.180	0.194	0.163	0.163	0.163	---
	1/2	12.7	3/4	19	C _V	0.487	0.952	1.40	2.07	2.90	3.55	4.54	6.16	8.79	11.2	0.50
					K _V	0.421	0.823	1.21	1.79	2.51	3.07	3.93	5.33	7.60	9.69	---
					X _T	0.226	0.137	0.124	0.111	0.111	0.144	0.174	0.185	0.180	0.186	---
	3/4	19.1	3/4	19	C _V	0.840	1.58	2.25	2.86	3.82	5.51	8.69	11.8	14.4	16.8	0.67
					K _V	0.727	1.37	1.95	2.47	3.30	4.77	7.52	10.2	12.5	14.5	---
					X _T	0.194	0.142	0.168	0.238	0.288	0.292	0.242	0.259	0.318	0.372	---
2	1/4	6.4	3/4	19	C _V	0.096	0.177	0.353	0.546	0.742	0.995	1.35	1.99	2.73	3.21	0.50
					K _V	0.083	0.153	0.305	0.472	0.642	0.861	1.17	1.72	2.36	2.78	---
					X _T	0.578	0.362	0.188	0.156	0.148	0.144	0.148	0.138	0.139	0.164	---
	3/8	9.5	3/4	19	C _V	0.256	0.445	0.734	1.09	1.45	1.84	2.47	3.81	5.58	7.06	0.45
					K _V	0.221	0.385	0.635	0.943	1.25	1.59	2.14	3.30	4.83	6.11	---
					X _T	0.394	0.237	0.164	0.140	0.152	0.180	0.194	0.163	0.163	0.163	---
	1/2	12.7	3/4	19	C _V	0.641	1.03	1.55	2.20	2.90	3.55	4.63	7.13	9.86	12.1	0.45
					K _V	0.555	0.891	1.34	1.90	2.51	3.07	4.01	6.17	8.53	10.5	---
					X _T	0.265	0.195	0.162	0.143	0.146	0.168	0.179	0.165	0.165	0.164	---
	3/4	19.1	3/4	19	C _V	1.06	1.70	2.25	2.86	3.82	5.51	8.69	13.1	17.4	21.2	0.55
					K _V	0.917	1.47	1.95	2.47	3.30	4.77	7.52	11.3	15.1	18.3	---
					X _T	0.209	0.195	0.235	0.295	0.325	0.306	0.245	0.210	0.222	0.235	---
	1	25.4	3/4	19	C _V	2.04	2.93	3.59	4.32	5.98	8.71	13.0	19.9	26.7	31.8	0.55
					K _V	1.76	2.53	3.11	3.74	5.17	7.53	11.2	17.2	23.1	27.5	---
					X _T	0.171	0.176	0.242	0.342	0.343	0.313	0.274	0.227	0.225	0.255	---
	1-1/4	31.8	3/4	19	C _V	1.72	2.31	3.31	4.71	6.78	10.5	17.6	26.0	35.2	44.9	0.59
					K _V	1.49	2.00	2.86	4.07	5.86	9.08	15.2	22.5	30.4	38.8	---
					X _T	0.312	0.311	0.311	0.311	0.310	0.310	0.312	0.311	0.311	0.310	---

1. At 100% travel.

Design DA

Equal Percentage Valve Plug Flow Up

Flow Up																Equal Percentage Characteristic
Valve Size, Inches	Port Diameter		Total Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
1	1/4	6.4	3/4	19	C _V	0.070	0.115	0.164	0.224	0.315	0.450	0.641	0.921	1.28	1.66	0.87
					K _V	0.060	0.100	0.142	0.194	0.273	0.389	0.555	0.797	1.11	1.44	---
					X _T	0.783	0.783	0.744	0.695	0.625	0.614	0.609	0.611	0.610	0.611	---
	3/8	9.5	3/4	19	C _V	0.155	0.260	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03	0.84
					K _V	0.134	0.225	0.352	0.516	0.742	1.05	1.43	1.92	2.60	3.49	---
					X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536	---
	1/2	12.7	3/4	19	C _V	0.273	0.436	0.631	0.911	1.30	1.84	2.57	3.65	5.08	6.51	0.84
					K _V	0.236	0.377	0.546	0.788	1.12	1.59	2.22	3.16	4.39	5.63	---
					X _T	0.673	0.644	0.641	0.590	0.592	0.587	0.586	0.557	0.524	0.549	---
	3/4	19.1	3/4	19	C _V	0.483	0.775	1.25	1.97	2.89	4.13	5.87	8.16	10.9	12.3	0.92
					K _V	0.418	0.670	1.08	1.70	2.50	3.57	5.08	7.06	9.43	10.6	---
					X _T	0.571	0.599	0.527	0.473	0.492	0.519	0.537	0.505	0.486	0.628	---
2	1/4	6.4	3/4	19	C _V	0.070	0.115	0.164	0.224	0.315	0.450	0.641	0.921	1.28	1.66	0.87
					K _V	0.061	0.100	0.142	0.194	0.273	0.389	0.555	0.797	1.11	1.44	---
					X _T	0.783	0.783	0.744	0.695	0.625	0.614	0.609	0.611	0.610	0.611	---
	3/8	9.5	3/4	19	C _V	0.155	0.260	0.407	0.596	0.858	1.21	1.65	2.22	3.00	4.03	0.84
					K _V	0.134	0.225	0.352	0.516	0.742	1.05	1.43	1.92	2.60	3.49	---
					X _T	0.625	0.535	0.534	0.539	0.535	0.535	0.538	0.534	0.537	0.536	---
	1/2	12.7	3/4	19	C _V	0.348	0.505	0.709	0.989	1.38	1.92	2.69	3.82	5.25	6.82	0.81
					K _V	0.301	0.437	0.613	0.856	1.19	1.66	2.33	3.30	4.54	5.90	---
					X _T	0.613	0.627	0.585	0.587	0.565	0.553	0.535	0.509	0.490	0.501	---
	3/4	19.1	3/4	19	C _V	0.613	0.952	1.44	2.06	2.92	4.13	5.87	8.16	11.1	14.1	0.81
					K _V	0.530	0.824	1.25	1.78	2.53	3.57	5.08	7.06	9.60	12.2	---
					X _T	0.582	0.616	0.581	0.586	0.581	0.573	0.549	0.541	0.529	0.528	---
	1	25.4	3/4	19	C _V	1.20	1.68	2.44	3.53	5.05	7.28	10.5	14.0	18.4	23.7	0.81
					K _V	1.04	1.45	2.11	3.05	4.37	6.30	9.08	12.1	15.9	20.5	---
					X _T	0.516	0.569	0.556	0.542	0.544	0.540	0.507	0.508	0.507	0.508	---
	1-1/4	31.8	3/4	19	C _V	1.32	1.76	2.50	3.66	5.42	8.25	12.7	20.6	29.0	34.5	0.87
					K _V	1.14	1.52	2.16	3.17	4.69	7.14	11.0	17.8	25.1	29.8	---
					X _T	0.520	0.563	0.548	0.534	0.498	0.503	0.554	0.528	0.524	0.578	---

1. At 100% travel.

Catalog 12

October 1998
Page DA-2

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1998;
All Rights Reserved

Micro-Flute™ Valve Plug
Flow Down & Flow Up

Micro-Flute - Flow Down															Equal Percentage Characteristic	
Valve Size, Inches	Port Diameter		Total Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L (1)
	Inches	mm	Inches	mm		10	20	30	40	50	60	70	80	90	100	
1 and 2	1/4 1 Flute	6.4 1 Flute	3/4	19	C _V	0.0313	0.0377	0.0470	0.0624	0.0874	0.124	0.175	0.243	0.330	0.407	0.79
					K _V	0.0271	0.0326	0.0407	0.0540	0.0756	0.107	0.151	0.210	0.286	0.352	---
					X _T	0.990	0.975	0.867	0.765	0.659	0.569	0.494	0.450	0.450	0.550	---
	1/4 3 Flutes	6.4 3 Flutes	3/4	19	C _V	0.0612	0.0900	0.136	0.210	0.310	0.430	0.573	0.784	1.12	1.42	0.68
					K _V	0.0529	0.0779	0.118	0.182	0.268	0.372	0.496	0.678	0.969	1.23	---
					X _T	0.669	0.520	0.388	0.313	0.295	0.306	0.326	0.326	0.313	0.378	---
Micro-Flute - Flow Up															Equal Percentage Characteristic	
1 and 2	1/4 1 Flute	6.4 1 Flute	3/4	19	C _V	0.0385	0.0455	0.0560	0.0719	0.0942	0.124	0.162	0.212	0.278	0.354	0.87
					K _V	0.0333	0.0394	0.0484	0.0622	0.0815	0.107	0.140	0.183	0.241	0.306	---
					X _T	0.778	0.734	0.690	0.653	0.642	0.635	0.637	0.634	0.632	0.656	---
	1/4 3 Flutes	6.4 3 Flutes	3/4	19	C _V	0.0562	0.0725	0.101	0.146	0.216	0.312	0.433	0.588	0.802	1.07	0.90
					K _V	0.049	0.0627	0.0874	0.126	0.187	0.270	0.375	0.509	0.694	0.926	---
					X _T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624	---
1. At 100% travel.																

Micro-Flute, Fisher, and Fisher-Rosemount are marks owned by Fisher Controls International, Inc. or Fisher-Rosemount Systems, Inc. All other marks are the property of their respective owners.

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1998;
All Rights Reserved



Catalog 12

January 2013 - Page D3-1

Equal Percentage / Micro-Form Plug

Equal Percentage / Micro-Form Plug													Equal Percentage Characteristic	
Valve Size, NPS	Flow Direction	Port Diameter	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
		Inches		10	20	30	40	50	60	70	80	90	100	
1	Up	0.375	C _V	0.266	0.480	0.698	0.984	1.31	1.69	2.10	2.63	3.23	3.70	0.94
			K _V	0.230	0.415	0.522	0.851	1.13	1.46	1.82	2.27	2.79	3.20	---
			X _T	0.449	0.455	0.468	0.481	0.477	0.495	0.482	0.488	0.516	0.572	---
		0.75	C _V	0.708	1.34	1.97	2.60	3.58	4.95	6.44	7.95	9.30	10.4	0.91
			K _V	0.612	1.16	1.70	2.25	3.10	4.28	5.57	6.88	8.04	9.00	---
			X _T	0.499	0.463	0.505	0.491	0.505	0.541	0.562	0.559	0.599	0.653	---
		1	C _V	1.38	2.70	3.98	5.30	6.80	8.00	9.60	11.2	12.5	13.6	0.86
			K _V	1.19	2.34	3.44	4.58	5.88	6.92	8.30	9.69	10.8	11.8	---
			X _T	0.457	0.449	0.520	0.544	0.542	0.564	0.542	0.572	0.662	0.761	---
	Down	0.375	C _V	0.600	1.02	1.40	1.90	2.37	2.74	2.90	3.78	4.58	5.00	0.59
			K _V	0.519	0.882	1.21	1.64	2.05	2.37	2.51	3.27	3.96	4.33	---
			X _T	0.163	0.172	0.161	0.188	0.250	0.342	0.450	0.454	0.435	0.376	---
		0.75	C _V	1.31	2.30	3.20	2.90	3.50	5.10	6.58	7.60	8.50	9.07	0.91
			K _V	1.13	1.99	2.77	2.51	3.03	4.41	5.69	6.57	7.35	7.85	---
			X _T	0.160	0.177	0.242	0.402	0.527	0.566	0.616	0.686	0.793	0.882	---
		1	C _V	1.50	2.90	4.85	6.58	7.25	8.00	8.70	9.84	10.8	11.5	0.90
			K _V	1.30	2.51	4.20	5.69	6.27	6.92	7.53	8.51	9.34	9.95	---
			X _T	0.250	0.344	0.415	0.518	0.585	0.639	0.654	0.749	0.819	0.983	---
2	Up	0.375	C _V	0.270	0.480	0.690	0.990	1.32	1.70	2.13	2.66	3.29	3.74	0.95
			K _V	0.233	0.415	0.597	0.856	1.14	1.47	1.84	2.30	2.85	3.24	---
			X _T	0.437	0.426	0.439	0.472	0.476	0.475	0.480	0.387	0.459	0.563	---
		0.75	C _V	0.653	1.28	1.90	2.55	3.50	4.86	6.58	8.40	10.1	11.5	0.92
			K _V	0.565	1.11	1.64	2.21	3.03	4.20	5.69	7.27	8.74	9.95	---
			X _T	0.510	0.489	0.476	0.476	0.482	0.504	0.513	0.509	0.496	0.478	---
		1	C _V	1.71	3.03	4.54	6.00	7.35	9.10	11.1	13.2	15.3	16.8	0.91
			K _V	1.48	2.62	3.93	5.19	6.36	7.87	9.60	11.4	13.2	14.5	---
			X _T	0.434	0.455	0.497	0.513	0.504	0.489	0.459	0.453	0.530	0.578	---
	Down	0.375	C _V	0.480	0.900	1.30	1.75	2.20	2.50	2.85	3.50	4.40	4.70	0.62
			K _V	0.415	0.779	1.12	1.51	1.90	2.16	2.47	3.03	3.81	4.07	---
			X _T	0.163	0.171	0.171	0.184	0.245	0.346	0.462	0.378	0.391	0.375	---
		0.75	C _V	1.08	2.00	3.00	3.20	3.50	5.00	6.75	8.26	9.40	10.4	0.91
			K _V	0.934	1.73	2.60	2.77	3.03	4.33	5.84	7.14	8.13	9.00	---
			X _T	0.164	0.179	0.199	0.357	0.501	0.530	0.560	0.583	0.650	0.683	---
		1	C _V	1.55	3.40	5.35	6.85	7.90	8.70	10.3	11.9	12.9	13.8	0.86
			K _V	1.34	2.94	4.63	5.93	6.83	7.53	8.91	10.3	11.2	11.9	---
			X _T	0.260	0.356	0.459	0.524	0.528	0.564	0.552	0.597	0.705	0.763	---

This page is intentionally left blank.

Catalog 12

August 2004 - Page D4-1

Micro-Form Equal Percentage
Flow Up through the Port

Micro-Form™ - Flow Up															Equal Percentage Characteristic		
Valve Size	Port Diameter		Total Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches		5	10	20	30	40	50	60	70	80	90		100
1 Inch	6.4	0.25	19	0.75	C _V	0.0679	0.0858	0.122	0.167	0.231	0.325	0.458	0.646	0.905	1.25	1.76	0.96
					K _V	0.0587	0.0742	0.106	0.144	0.200	0.281	0.396	0.559	0.783	1.08	1.52	---
					X _T	0.705	0.623	0.620	0.631	0.585	0.565	0.578	0.569	0.555	0.588	0.569	---
	9.5	0.375	19	0.75	C _V	0.114	0.132	0.205	0.298	0.426	0.590	0.834	1.21	1.75	2.45	3.53	0.95
					K _V	0.099	0.114	0.177	0.258	0.368	0.510	0.721	1.05	1.51	2.12	3.05	---
					X _T	0.776	0.848	0.656	0.673	0.626	0.608	0.589	0.582	0.575	0.588	0.691	---
	12.7	0.5	19	0.75	C _V	0.185	0.235	0.357	0.523	0.752	1.07	1.50	2.13	3.05	4.30	5.87	0.96
					K _V	0.160	0.203	0.309	0.452	0.650	0.926	1.30	1.84	2.64	3.72	5.08	---
					X _T	0.718	0.674	0.640	0.596	0.575	0.592	0.593	0.568	0.569	0.599	0.755	---
	19.1	0.75	19	0.75	C _V	0.324	0.358	0.571	0.900	1.30	1.91	3.04	5.08	7.75	9.56	11.2	0.94
					K _V	0.280	0.310	0.494	0.779	1.13	1.65	2.63	4.39	6.70	8.27	9.69	---
					X _T	0.561	0.684	0.645	0.594	0.605	0.614	0.592	0.594	0.613	0.696	0.783	---
2 Inch	6.4	0.25	19	0.75	C _V	0.0679	0.0858	0.122	0.167	0.231	0.325	0.458	0.646	0.905	1.25	1.76	0.96
					K _V	0.0587	0.0742	0.106	0.144	0.200	0.281	0.396	0.559	0.783	1.08	1.52	---
					X _T	0.705	0.623	0.620	0.631	0.585	0.565	0.578	0.569	0.555	0.588	0.569	---
	9.5	0.375	19	0.75	C _V	0.114	0.132	0.205	0.298	0.426	0.590	0.834	1.21	1.75	2.45	3.53	0.95
					K _V	0.099	0.114	0.177	0.258	0.368	0.510	0.721	1.05	1.51	2.12	3.05	---
					X _T	0.776	0.848	0.656	0.673	0.626	0.608	0.589	0.582	0.575	0.588	0.691	---
	12.7	0.5	19	0.75	C _V	0.186	0.244	0.359	0.540	0.784	1.09	1.52	2.25	3.20	4.49	6.27	0.95
					K _V	0.161	0.211	0.311	0.467	0.678	0.943	1.32	1.95	2.77	3.88	5.42	---
					X _T	0.814	0.699	0.799	0.685	0.593	0.560	0.573	0.531	0.536	0.547	0.612	---
	19.1	0.75	19	0.75	C _V	0.305	0.367	0.583	0.892	1.31	2.02	3.14	5.18	8.01	10.6	13.4	0.92
					K _V	0.264	0.317	0.504	0.772	1.13	1.75	2.72	4.48	6.93	9.17	11.6	---
					X _T	0.697	0.513	0.477	0.481	0.478	0.447	0.400	0.432	0.465	0.512	0.640	---
	25.4	1	19	0.75	C _V	0.734	0.922	1.35	1.79	2.38	3.65	5.50	9.04	13.6	17.3	21.6	0.95
					K _V	0.635	0.798	1.17	1.55	2.06	3.16	4.76	7.82	11.8	15.0	18.7	---
					X _T	0.501	0.684	0.658	0.548	0.648	0.548	0.577	0.525	0.513	0.632	0.745	---
	31.8	1.25	19	0.75	C _V	1.08	1.22	1.65	2.26	3.24	5.14	8.90	15.2	22.6	26.9	33.2	0.94
					K _V	0.934	1.06	1.43	1.96	2.80	4.45	7.70	13.1	19.5	23.3	28.7	---
					X _T	0.587	0.686	0.636	0.638	0.649	0.520	0.706	0.687	0.680	0.767	0.761	---
1. At 100% travel.																	

1. At 100% travel.



This page intentionally left blank

Catalog 12

February 2010 - Page EAD-1

With Liner

With Liner																Quick Opening Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coefficient	Coeffs. for 6 mm (1/4 in.) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
1	33.3	0.3125	19	0.75	C _V	14.2	5.14	9.24	13.1	16.2	18.8	20.9	22.4	23.4	24.0	24.0	0.90
					K _V	12.3	4.45	7.99	11.3	14.0	16.3	18.1	19.4	20.2	20.8	20.8	---
					X _T	0.800	0.629	0.703	0.761	0.809	0.775	0.713	0.677	0.652	0.630	0.630	---
2	47.6	1.875	19	0.75	C _V	29.4	8.77	17.1	26.2	36.1	45.4	53.4	59.3	63.6	67.3	70.7	0.76
					K _V	25.4	7.59	14.8	22.7	31.2	39.3	46.2	51.3	55.0	58.2	61.2	---
					X _T	0.573	0.480	0.513	0.568	0.570	0.577	0.589	0.628	0.618	0.656	0.656	---
	33.3	1.3125	19	0.75	C _V	17.3	5.91	10.1	15.1	21.7	29.4	37.3	43.7	48.5	52.4	55.2	0.60
					K _V	15.0	5.11	8.74	13.1	18.8	25.4	32.3	37.8	42.0	45.3	47.7	---
					X _T	0.543	0.404	0.584	0.570	0.522	0.478	0.431	0.396	0.370	0.344	0.326	---
3	73.0	2.875	38	1.5	C _V	30.6	24.2	47.2	77.8	108	133	148	159	171	181	183	0.76
					K _V	26.5	20.9	40.8	67.3	93.4	115	128	138	148	157	158	---
					X _T	0.540	0.517	0.534	0.504	0.545	0.582	0.636	0.651	0.616	0.575	0.569	---
	47.6	1.875	19	0.75	C _V	29.8	7.96	15.5	25.7	37.4	49.0	61.2	72.5	83.1	92.8	102	0.60
					K _V	25.8	6.89	13.4	22.2	32.4	42.4	52.9	62.7	71.9	80.3	88.2	---
					X _T	0.576	0.549	0.624	0.603	0.541	0.525	0.482	0.452	0.422	0.391	0.349	---
4	87.3	3.4375	38	1.5	C _V	37.1	22.3	46.3	77.1	117	155	180	197	212	230	235	0.72
					K _V	32.1	19.3	40.0	66.7	101	134	156	170	183	199	203	---
					X _T	0.580	0.616	0.547	0.537	0.531	0.529	0.575	0.629	0.635	0.609	0.620	---
	58.7	2.3125	29	1.125	C _V	31.4	14.4	28.3	46.1	66.7	87.5	107	124	138	149	160	0.61
					K _V	27.2	12.5	24.5	39.9	57.7	75.7	92.6	107	119	129	138	---
					X _T	0.548	0.509	0.533	0.505	0.486	0.482	0.465	0.443	0.416	0.387	0.354	---
6	111.1	4.375	51	2	C _V	50.0	39.8	84.0	150	219	279	332	379	420	435	435	0.71
					K _V	43.3	34.4	72.7	130	189	241	287	328	363	376	376	---
					X _T	0.578	0.597	0.599	0.577	0.581	0.581	0.578	0.565	0.527	0.533	0.533	---
	73.0	2.875	38	1.5	C _V	38.7	23.9	47.1	74.9	109	142	174	201	219	244	248	0.59
					K _V	33.5	20.7	40.7	64.8	94.3	123	151	174	189	211	215	---
					X _T	0.353	0.353	0.353	0.353	0.353	0.356	0.352	0.353	0.352	0.353	0.354	---
1. When using Fisher 655-EAD as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (3/4 inch).																	
2. When sizing self-operated regulators, use coefficients listed for 6 mm (1/4 inch) travel.																	
3. At 100% travel.																	
Restricted trim.																	



EAD

Quick Opening Cage

Catalog 12

Without Liner

February 2010 - Page EAD-2

Without Liner ⁽⁴⁾																Quick Opening Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coeff- icient	Coeffs. for 6 mm (1/4 in.) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
1	33.3	0.3125	19	0.75	C _V	14.8	5.07	9.36	13.6	16.8	19.2	20.9	22.2	23.1	23.6	23.7	0.87
					K _V	12.8	4.39	8.10	11.8	14.5	16.6	18.1	19.2	20.0	20.4	20.5	---
					X _T	0.757	0.638	0.753	0.766	0.736	0.703	0.670	0.650	0.640	0.636	---	
2	47.6	1.875	19	0.75	C _V	28.0	8.06	15.7	24.9	34.3	43.1	51.0	57.1	61.4	64.6	67.2	0.87
					K _V	24.2	6.97	13.6	21.5	29.7	37.3	44.1	49.4	53.1	55.9	58.1	---
					X _T	0.629	0.531	0.621	0.623	0.631	0.641	0.638	0.656	0.676	0.686	0.682	---
	33.3	1.3125	19	0.75	C _V	17.2	6.02	10.4	15.4	20.9	27.1	33.7	38.5	41.7	44.2	45.6	0.71
					K _V	14.9	5.21	9.00	13.3	18.1	23.4	29.2	33.3	36.1	38.2	39.4	---
					X _T	0.573	0.470	0.541	0.570	0.575	0.563	0.526	0.510	0.492	0.476	0.470	---
3	73.0	2.875	38	1.5	C _V	39.2	23.4	47.9	78.7	108	128	142	153	163	171	171	0.81
					K _V	33.9	20.2	41.4	68.1	93.4	111	123	132	141	148	148	---
					X _T	0.576	0.588	0.573	0.534	0.573	0.635	0.662	0.654	0.626	0.600	0.605	---
	47.6	1.875	19	0.75	C _V	29.1	8.27	15.9	25.6	36.0	46.8	56.4	64.6	72.1	79.3	86.1	0.72
					K _V	25.2	7.15	13.8	22.1	31.1	40.5	48.8	55.9	62.4	68.6	74.5	---
					X _T	0.609	0.488	0.603	0.610	0.594	0.575	0.574	0.569	0.561	0.530	0.490	---
4	87.3	3.4375	38	1.5	C _V	39.0	23.9	48.2	80.3	118	151	178	195	209	223	223	0.76
					K _V	33.7	20.7	41.7	69.5	102	131	154	169	181	193	193	---
					X _T	0.562	0.588	0.566	0.554	0.556	0.580	0.610	0.659	0.669	0.644	0.650	---
	58.7	2.3125	29	1.125	C _V	30.9	13.6	27.0	43.9	62.5	80.6	96.0	109	120	127	133	0.73
					K _V	26.7	11.8	23.4	38.0	54.1	69.7	83.0	94.3	104	110	115	---
					X _T	0.608	0.593	0.614	0.582	0.578	0.587	0.590	0.576	0.547	0.533	0.513	---
6	111.1	4.375	51	2	C _V	45.8	37.6	79.6	142	207	265	311	351	383	398	398	0.76
					K _V	39.6	32.5	68.9	123	179	229	269	304	331	344	344	---
					X _T	0.652	0.680	0.652	0.639	0.639	0.655	0.686	0.683	0.666	0.657	0.667	---
	73.0	2.875	38	1.5	C _V	35.4	21.8	43.1	71.5	103	130	154	173	188	198	206	0.74
					K _V	30.6	18.9	37.3	61.8	89.1	112	133	150	163	171	178	---
					X _T	0.671	0.624	0.650	0.652	0.618	0.659	0.659	0.646	0.620	0.595	0.568	---

1. When using Fisher 655-EAD as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (3/4 inch).

2. When sizing self-operated regulators, use coefficients listed for 6 mm (1/4 inch) travel.

3. At 100% travel.

4. For NPS 8 values, please see the ED Catalog 12 pages.

Restricted trim.


Note: The coefficients shown on this page are also appropriate for Fisher EAS and EAT.

Catalog 12

February 2010 - Page EAD-3

With Liner

With Liner - Flow Down																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1.3125	19	0.75	C _V	2.71	5.17	8.14	10.7	13.0	15.2	17.2	19.1	20.7	22.0	0.90
					K _V	2.34	4.47	7.04	9.26	11.2	13.1	14.9	16.5	17.9	19.0	---
					X _T	0.632	0.692	0.719	0.772	0.786	0.777	0.755	0.722	0.682	0.634	---
2	47.6	1.875	19	0.75	C _V	3.77	6.94	11.3	16.1	21.0	26.7	33.1	40.1	46.8	53.8	0.82
					K _V	3.26	6.00	9.77	13.9	18.2	23.1	28.6	34.7	40.5	46.5	---
					X _T	0.665	0.675	0.663	0.642	0.627	0.616	0.617	0.607	0.633	0.661	---
	33.3	1.3125	19	0.75	C _V	2.95	5.49	8.65	12.1	15.7	19.3	23.4	29.7	35.7	41.0	0.66
					K _V	2.55	4.75	7.48	10.5	13.6	16.7	20.2	25.7	30.9	35.5	---
					X _T	0.474	0.592	0.587	0.581	0.579	0.584	0.564	0.487	0.451	0.426	---
3	73.0	2.875	38	1.5	C _V	10.3	24.0	38.8	54.3	69.8	86.5	102	124	141	155	0.80
					K _V	8.91	20.8	33.6	47.0	60.4	74.8	88.2	107	122	134	---
					X _T	0.630	0.623	0.618	0.598	0.599	0.591	0.619	0.603	0.614	0.614	---
	47.6	1.875	19	0.75	C _V	3.37	6.45	10.6	15.3	19.8	25.3	32.2	40.1	48.4	58.1	0.74
					K _V	2.92	5.58	9.17	13.2	17.1	21.9	27.9	34.7	41.9	50.3	---
					X _T	0.630	0.682	0.693	0.665	0.663	0.637	0.600	0.588	0.569	0.548	---
4	87.3	3.4375	38	1.5	C _V	12.7	31.6	54.1	77.8	103	128	149	171	191	208	0.78
					K _V	11.0	27.3	46.8	67.3	89.1	111	129	148	165	180	---
					X _T	0.677	0.638	0.596	0.590	0.552	0.548	0.573	0.594	0.613	0.627	---
	58.7	2.3125	29	1.125	C _V	6.70	15.3	25.2	37.0	50.2	64.5	79.4	94.6	110	124	0.66
					K _V	5.80	13.2	21.8	32.0	43.4	55.8	68.7	81.8	95.2	107	---
					X _T	0.705	0.590	0.596	0.573	0.536	0.509	0.493	0.490	0.471	0.445	---
6	111.1	4.375	51	2	C _V	25.4	53.6	83.0	113	146	179	218	263	309	350	0.78
					K _V	22.0	46.4	71.8	97.7	126	155	189	227	267	303	---
					X _T	0.670	0.666	0.666	0.659	0.631	0.627	0.623	0.624	0.630	0.617	---
	73.0	2.875	38	1.5	C _V	10.6	25.2	41.1	57.7	76.1	94.8	116	139	168	195	0.67
					K _V	9.17	21.8	35.6	49.9	65.8	82.0	100	120	145	169	---
					X _T	0.445	0.443	0.448	0.445	0.445	0.445	0.443	0.448	0.442	0.444	---

1. At 100% travel.
 Restricted trim.

Note: The coefficients shown on this page are also appropriate for Fisher EAS and EAT.



EAD Linear Cage

Catalog 12

Without Liner

February 2010 - Page EAD-4

Without Liner - Flow Down ⁽²⁾																Linear Characteristic
Valve Size, Inches	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1.3125	19	0.75	C _V	2.90	5.78	8.85	11.6	13.9	16.0	18.0	19.7	21.2	22.3	0.89
					K _V	2.51	5.00	7.66	10.0	12.0	13.8	15.6	17.0	18.3	19.3	---
					X _T	0.778	0.704	0.699	0.736	0.745	0.747	0.730	0.699	0.664	0.624	---
2	47.6	1.875	19	0.75	C _V	3.68	6.98	11.3	15.9	20.8	26.4	32.7	39.2	45.7	52.5	0.84
					K _V	3.18	6.04	9.77	13.8	18.0	22.8	28.3	33.9	39.5	45.4	---
					X _T	0.676	0.667	0.684	0.666	0.624	0.627	0.632	0.625	0.655	0.679	---
	33.3	1.3125	19	0.75	C _V	3.01	5.45	8.95	12.5	15.9	19.1	23.3	28.4	33.2	37.6	0.73
					K _V	2.60	4.71	7.74	10.8	13.8	16.5	20.2	24.6	28.7	32.5	---
					X _T	0.790	0.768	0.661	0.618	0.608	0.611	0.582	0.545	0.535	0.516	---
3	73.0	2.875	38	1.5	C _V	10.9	25.1	41.3	58.4	75.7	93.9	112	128	143	153	0.83
					K _V	9.43	21.7	35.7	50.5	65.5	81.2	96.9	111	124	132	---
					X _T	0.736	0.638	0.591	0.548	0.538	0.532	0.543	0.583	0.619	0.631	---
	47.6	1.875	19	0.75	C _V	3.61	6.92	11.1	15.5	20.6	26.4	33.2	41.4	50.1	60.2	0.78
					K _V	3.12	5.99	9.60	13.4	17.8	22.8	28.7	35.8	43.3	52.1	---
					X _T	0.623	0.721	0.694	0.684	0.663	0.630	0.602	0.570	0.568	0.546	---
4	87.3	3.4375	38	1.5	C _V	14.0	33.8	56.3	80.2	104	127	148	169	185	201	0.81
					K _V	12.1	29.2	48.7	69.4	90.0	110	128	146	160	174	---
					X _T	0.640	0.638	0.611	0.588	0.570	0.568	0.593	0.622	0.660	0.664	---
	58.7	2.3125	29	1.125	C _V	7.02	15.7	25.7	36.9	48.6	60.9	72.9	84.6	97.2	108	0.76
					K _V	6.07	13.6	22.2	31.9	42.0	52.7	63.1	73.2	84.1	93.4	---
					X _T	0.712	0.626	0.625	0.597	0.587	0.577	0.590	0.604	0.580	0.566	---
6	111.1	4.375	51	2	C _V	24.2	51.2	81.8	109	140	171	208	256	300	341	0.78
					K _V	20.9	44.3	70.8	94.3	121	148	180	221	260	295	---
					X _T	0.643	0.697	0.666	0.693	0.672	0.668	0.684	0.663	0.668	0.662	---
	73.0	2.875	38	1.5	C _V	10.2	22.8	36.6	52.1	68.0	84.5	102	124	147	168	0.74
					K _V	8.82	19.7	31.7	45.1	58.8	73.1	88.2	107	127	145	---
					X _T	0.592	0.651	0.661	0.635	0.619	0.619	0.615	0.584	0.568	0.556	---

1. At 100% travel.
2. For NPS 8 values, please see the ED Catalog 12 pages.
Restricted trim.

Note: The coefficients shown on this page are also appropriate for Fisher EAS and EAT.

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 1988, 2010; All Rights Reserved




Catalog 12

February 2010 - Page EAD-5

With Liner

With Liner - Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1.3125	19	0.75	C _V	1.02	1.49	2.07	2.70	3.92	5.68	8.18	11.7	15.5	18.5	0.93
					K _V	0.882	1.29	1.79	2.34	3.39	4.91	7.08	10.1	13.4	16.0	---
					X _T	0.902	0.902	0.820	0.740	0.741	0.737	0.738	0.734	0.742	0.739	---
2	47.6	1.875	19	0.75	C _V	1.44	2.38	3.54	5.10	7.60	11.6	18.1	26.9	37.8	48.1	0.83
					K _V	1.25	2.06	3.06	4.41	6.57	10.0	15.7	23.3	32.7	41.6	---
					X _T	0.619	0.649	0.671	0.678	0.666	0.639	0.574	0.578	0.578	0.576	---
	33.3	1.3125	19	0.75	C _V	0.792	1.28	1.84	2.56	3.78	5.66	8.64	13.3	19.9	27.6	0.75
					K _V	0.685	1.11	1.59	2.21	3.27	4.90	7.47	11.5	17.2	23.9	---
					X _T	0.648	0.654	0.682	0.659	0.683	0.661	0.592	0.534	0.479	0.468	---
3	73.0	2.875	38	1.5	C _V	4.38	7.99	12.1	16.5	24.2	36.5	56.6	85.9	116	151	0.78
					K _V	3.79	6.91	10.5	14.3	20.9	31.6	49.0	74.3	100	131	---
					X _T	0.783	0.746	0.680	0.652	0.620	0.588	0.551	0.525	0.553	0.550	---
	47.6	1.875	19	0.75	C _V	1.31	2.28	3.48	5.05	7.58	11.9	18.2	26.7	38.4	50.5	0.78
					K _V	1.13	1.97	3.01	4.37	6.56	10.3	15.7	23.1	33.2	43.7	---
					X _T	0.804	0.758	0.719	0.725	0.696	0.634	0.637	0.611	0.561	0.530	---
4	87.3	3.4375	38	1.5	C _V	2.31	0.470	7.45	11.3	17.8	28.7	47.9	77.5	112	152	0.81
					K _V	2.00	0.41	6.44	9.77	15.4	24.8	41.4	67.0	96.9	131	---
					X _T	0.780	0.780	0.791	0.726	0.652	0.630	0.565	0.546	0.549	0.545	---
	58.7	2.3125	29	1.125	C _V	2.24	3.67	5.44	7.81	11.7	17.9	27.6	41.9	62.6	86.3	0.73
					K _V	1.94	3.17	4.71	6.76	10.1	15.5	23.9	36.2	54.1	74.6	---
					X _T	0.630	0.668	0.662	0.672	0.659	0.610	0.593	0.574	0.500	0.456	---
6	111.1	4.375	51	2	C _V	5.54	11.0	18.1	30.9	51.7	84.3	136	205	276	336	0.74
					K _V	4.79	9.52	15.7	26.7	44.7	72.9	118	177	239	291	---
					X _T	0.727	0.684	0.657	0.624	0.599	0.585	0.590	0.587	0.573	0.576	---
	73.0	2.875	38	1.5	C _V	1.32	3.73	7.20	11.1	17.5	27.6	43.4	67.8	102	147	0.74
					K _V	1.14	3.23	6.23	9.60	15.1	23.9	37.5	58.6	88.2	127	---
					X _T	0.455	0.458	0.454	0.457	0.453	0.454	0.454	0.455	0.454	0.454	---
1. At 100% travel. Restricted trim.																

1. At 100% travel.
 Restricted trim.



EAD


Equal Percentage Cage

Catalog 12

Without Liner

February 2010 - Page EAD-6

Without Liner - Flow Down ⁽²⁾															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1.3125	19	0.75	C _V	1.08	1.62	2.20	2.96	4.18	6.04	8.74	12.5	16.5	19.0	0.91
					K _V	0.934	1.40	1.90	2.56	3.62	5.22	7.56	10.8	14.3	16.4	---
					X _T	0.912	0.860	0.808	0.771	0.742	0.706	0.693	0.699	0.697	0.694	---
2	47.6	1.875	19	0.75	C _V	1.67	2.60	3.82	5.43	7.79	12.2	18.9	27.4	37.8	47.2	0.85
					K _V	1.44	2.25	3.30	4.70	6.74	10.6	16.3	23.7	32.7	40.8	---
					X _T	0.680	0.690	0.702	0.725	0.707	0.619	0.622	0.621	0.619	0.623	---
	33.3	1.3125	19	0.75	C _V	1.11	1.55	2.05	2.87	4.07	5.95	8.84	13.4	19.6	26.8	0.79
					K _V	0.960	1.34	1.77	2.48	3.52	5.15	7.65	11.6	17.0	23.2	---
					X _T	0.938	0.899	0.848	0.789	0.761	0.692	0.636	0.568	0.519	0.507	---
3	73.0	2.875	38	1.5	C _V	4.59	8.29	12.0	16.9	25.0	37.7	57.3	85.1	121	148	0.80
					K _V	3.97	7.17	10.4	14.6	21.6	32.6	49.6	73.6	105	128	---
					X _T	0.779	0.744	0.715	0.684	0.630	0.582	0.583	0.579	0.578	0.580	---
	47.6	1.875	19	0.75	C _V	1.56	2.51	3.68	5.40	7.65	11.7	18.2	27.0	37.3	47.8	0.84
					K _V	1.35	2.17	3.18	4.67	6.62	10.1	15.7	23.4	32.3	41.3	---
					X _T	0.834	0.807	0.768	0.718	0.756	0.723	0.679	0.627	0.615	0.615	---
4	87.3	3.4375	38	1.5	C _V	2.51	5.10	8.03	12.0	18.7	30.7	47.4	80.3	116	156	0.81
					K _V	2.17	4.41	6.95	10.4	16.2	26.6	41.0	69.5	100	135	---
					X _T	0.890	0.770	0.744	0.701	0.696	0.637	0.668	0.572	0.566	0.565	---
	58.7	2.3125	29	1.125	C _V	2.33	3.56	5.64	8.18	11.9	18.0	28.2	42.6	62.2	81.8	0.79
					K _V	2.02	3.08	4.88	7.08	10.3	15.6	24.4	36.8	53.8	70.8	---
					X _T	0.753	0.846	0.702	0.666	0.682	0.656	0.619	0.609	0.559	0.530	---
6	111.1	4.375	51	2	C _V	5.51	10.9	17.9	30.2	50.5	82.0	133	200	269	328	0.78
					K _V	4.77	9.43	15.5	26.1	43.7	70.9	115	173	233	284	---
					X _T	0.705	0.701	0.663	0.646	0.612	0.604	0.606	0.605	0.596	0.604	---
	73.0	2.875	38	1.5	C _V	4.00	7.63	11.1	15.0	23.3	35.0	53.3	79.6	112	144	0.78
					K _V	3.46	6.60	9.60	13.0	20.2	30.3	46.1	68.9	96.9	125	---
					X _T	0.670	0.698	0.725	0.731	0.637	0.629	0.599	0.597	0.573	0.571	---

1. At 100% travel.
2. For NPS 8 values, please see the ED Catalog 12 pages.
 Restricted trim.

Note: The coefficients shown on this page are also appropriate for Fisher EAS and EAT.

Catalog 12

February 2010 - Page EAD-7

Whisper Trim I - Flow Up ⁽¹⁾															Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel									
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100
1	33.3	1.3125	19	0.75	C _V	2.17	5.30	8.44	11.8	14.7	16.6	19.5	21.5	23.1	24.1
					K _V	1.88	4.58	7.30	10.2	12.7	14.4	16.9	18.6	20.0	20.8
					X _T	0.390	0.406	0.424	0.454	0.456	0.490	0.490	0.506	0.526	0.536
2	47.6	1.875	19	0.75	C _V	4.98	11.0	19.7	27.9	34.5	40.6	45.7	50.1	53.7	55.9
					K _V	4.31	9.52	17.0	24.1	29.8	35.1	39.5	43.3	46.5	48.4
					X _T	0.670	0.633	0.403	0.330	0.322	0.327	0.343	0.359	0.372	0.386
3	73.0	2.875	38	1.5	C _V	12.4	30.4	48.3	67.6	84.2	95.2	112	123	132	138
					K _V	10.7	26.3	41.8	58.5	72.8	82.3	96.9	106	114	119
					X _T	0.307	0.303	0.330	0.329	0.332	0.331	0.361	0.360	0.360	0.375
4	87.3	3.4375	38	1.5	C _V	16.7	42.9	67.5	91.2	113	133	152	168	182	194
					K _V	14.4	37.1	58.4	78.9	97.7	115	131	145	157	168
					X _T	0.738	0.411	0.378	0.331	0.323	0.342	0.354	0.370	0.391	0.400
6	111.1	4.375	51	2	C _V	28.8	70.4	112	157	195	220	260	285	310	320
					K _V	24.9	60.9	96.9	136	169	190	225	247	268	277
					X _T	0.303	0.331	0.361	0.330	0.330	0.360	0.360	0.390	0.391	0.403
1. For NPS 8 values, please see the ED Catalog 12 pages.															

1. For NPS 8 values, please see the ED Catalog 12 pages.

Note: The coefficients shown on this page are also appropriate for Fisher EAT.




This page is intentionally left blank.

Catalog 12

May 2013 - Page EAS-1

Quick Opening Cage


Quick Opening																	Quick Opening Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coeffi- cient	Coeffs. for 6 mm (1/4 in.) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
1	33.3	1-5/16	19	3/4	C _V	15.6	4.90	9.94	14.3	17.9	20.5	22.3	23.3	23.6	23.8	23.9	0.90
					K _V	13.5	4.24	8.60	12.4	15.5	17.7	19.3	20.2	20.4	20.6	20.7	---
					X _T	0.719	0.726	0.736	0.722	0.709	0.670	0.646	0.625	0.614	0.607	0.604	---
2	47.6	1-7/8	19	3/4	C _V	29.2	7.90	16.4	25.8	35.9	44.8	53.3	59.9	64.2	67.2	69.9	0.81
					K _V	25.3	6.83	14.2	22.3	31.1	38.8	46.1	51.8	55.5	58.1	60.5	---
					X _T	0.648	0.601	0.631	0.645	0.641	0.646	0.628	0.622	0.631	0.622	0.602	---
	33.3	1-5/16	19	3/4	C _V	16.7	5.43	10.2	15.1	20.3	26.1	31.4	35.2	37.5	39.2	40.5	0.87
					K _V	14.4	4.70	8.82	13.1	17.6	22.6	27.2	30.4	32.4	33.9	35.0	---
					X _T	0.632	0.591	0.631	0.632	0.621	0.638	0.673	0.739	0.786	0.763	0.726	---
3	73.0	2-7/8	38	1-1/2	C _V	38.8	24.5	47.3	79.1	106	125	139	154	168	177	184	0.90
					K _V	33.6	21.2	40.9	68.4	91.7	108	120	133	145	153	159	---
					X _T	0.638	0.630	0.637	0.619	0.693	0.729	0.705	0.641	0.596	0.569	0.563	---
	47.6	1-7/8	19	3/4	C _V	29.7	7.34	15.9	26.8	36.4	45.3	53.7	60.7	66.6	71.8	76.5	0.97
					K _V	25.7	6.35	13.8	23.2	31.5	39.2	46.5	52.5	57.6	62.1	66.2	---
					X _T	0.568	0.598	0.594	0.561	0.571	0.623	0.664	0.713	0.778	0.820	0.819	---
4	87.3	3-7/16	38	1-1/2	C _V	37.5	23.8	46.3	79.6	116	150	176	197	217	233	245	0.79
					K _V	32.4	20.6	40.0	68.9	100	130	152	170	188	202	212	---
					X _T	0.608	0.594	0.604	0.621	0.646	0.632	0.619	0.613	0.605	0.593	0.590	---
	58.7	2-5/16	29	1-1/8	C _V	31.5	14.2	28.4	45.2	63.2	80.6	96.1	109	119	129	135	0.81
					K _V	27.2	12.3	24.6	39.1	54.7	69.7	83.1	94.3	103	112	117	---
					X _T	0.624	0.622	0.623	0.617	0.626	0.665	0.706	0.740	0.771	0.666	0.625	---
6	111.1	4-3/8	51	2	C _V	51.1	40.0	84.3	138	194	246	293	340	378	403	409	0.78
					K _V	44.2	34.6	72.9	119	168	213	253	294	327	349	354	---
					X _T	0.582	0.581	0.585	0.587	0.584	0.582	0.583	0.585	0.578	0.582	0.584	---
	73.0	2-7/8	38	1-1/2	C _V	36.5	21.3	45.3	71.4	98.9	123	142	159	175	186	192	0.81
					K _V	31.6	18.4	39.2	61.8	85.5	106	123	138	151	161	166	---
					X _T	0.721	0.720	0.722	0.718	0.717	0.718	0.723	0.718	0.715	0.731	0.719	---
1. When using 655-EAS as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (3/4 inch).																	
2. When sizing self-operated regulators, use coefficients listed for 6 mm (1/4 inch) travel.																	
3. At 100% travel.																	
 Restricted trim.																	



Linear																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1-5/16	19	3/4	C _V	3.97	6.17	8.40	10.7	12.9	15.3	17.9	20.3	22.3	24.2	0.92
					K _V	3.43	5.34	7.27	9.26	11.2	13.2	15.5	17.6	19.3	20.9	---
					X _T	0.712	0.697	0.699	0.704	0.734	0.730	0.693	0.644	0.609	0.577	---
2	47.6	1-7/8	19	3/4	C _V	5.20	6.97	11.0	15.2	19.6	24.5	30.3	36.7	42.8	49.1	0.85
					K _V	4.50	6.03	9.52	13.1	17.0	21.2	26.2	31.7	37.0	42.5	---
					X _T	0.584	0.600	0.618	0.660	0.658	0.664	0.669	0.679	0.698	0.697	---
	33.3	1-5/16	19	3/4	C _V	2.45	4.35	6.44	8.80	11.8	15.4	19.4	23.6	28.1	32.7	0.89
					K _V	2.11	3.76	5.57	7.61	10.2	13.3	16.8	20.4	24.3	28.3	---
					X _T	0.723	0.723	0.749	0.736	0.690	0.651	0.642	0.655	0.688	0.720	---
3	73.0	2-7/8	38	1-1/2	C _V	10.5	22.9	35.5	48.7	61.8	76.3	91.3	109	129	149	0.85
					K _V	9.08	19.8	30.7	42.1	53.5	66.0	79.0	94.3	112	129	---
					X _T	0.651	0.649	0.691	0.692	0.701	0.698	0.702	0.686	0.666	0.646	---
	47.6	1-7/8	19	3/4	C _V	3.62	6.94	10.7	14.9	19.0	23.9	28.9	34.9	42.4	51.0	0.92
					K _V	3.13	6.00	9.26	12.9	16.4	20.7	25.0	30.2	36.7	44.1	---
					X _T	0.506	0.634	0.723	0.673	0.723	0.704	0.722	0.739	0.721	0.703	---
4	87.3	3-7/16	38	1-1/2	C _V	12.9	28.6	45.5	67.8	88.4	108	129	151	174	196	0.81
					K _V	11.2	24.7	39.4	58.6	76.5	93.4	112	131	151	170	---
					X _T	0.616	0.648	0.661	0.676	0.687	0.698	0.688	0.672	0.661	0.656	---
	58.7	2-5/16	29	1-1/8	C _V	6.84	13.9	22.1	31.2	40.9	51.3	62.0	73.2	84.8	95.0	0.87
					K _V	5.92	12.0	19.1	27.0	35.4	44.4	53.6	63.3	73.4	82.2	---
					X _T	0.647	0.661	0.688	0.655	0.631	0.623	0.625	0.644	0.696	0.723	---
6	111.1	4-3/8	51	2	C _V	26.1	52.3	78.3	105	132	164	200	247	303	361	0.81
					K _V	22.6	45.2	67.7	90.8	114	142	173	214	262	312	---
					X _T	0.631	0.684	0.727	0.718	0.720	0.690	0.683	0.670	0.647	0.623	---
	73.0	2-7/8	38	1-1/2	C _V	10.5	22.7	35.1	48.0	60.8	74.7	89.6	107	128	150	0.90
					K _V	9.08	19.6	30.4	41.5	52.6	64.6	77.5	92.6	111	130	---
					X _T	0.675	0.708	0.731	0.757	0.767	0.769	0.772	0.772	0.772	0.771	---

1. At 100% travel.

Restricted trim.

1. At 100% travel.
 Restricted trim.

Catalog 12

May 2013 - Page EAS-3

Equal Percentage Cage

Equal Percentage															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	33.3	1-5/16	19	3/4	C _v	1.29	1.87	2.59	3.85	5.59	8.46	12.5	16.9	20.9	23.5	0.82
					K _v	1.12	1.62	2.24	3.33	4.84	7.32	10.8	14.6	18.1	20.3	---
					X _T	0.812	0.771	0.674	0.702	0.730	0.714	0.723	0.669	0.633	0.579	---
2	47.6	1-7/8	19	3/4	C _v	1.41	2.41	3.43	4.86	7.26	11.3	17.3	24.5	32.6	40.8	0.91
					K _v	1.22	2.09	2.97	4.20	6.28	9.78	15.0	21.2	28.2	35.3	---
					X _T	0.724	0.736	0.727	0.738	0.723	0.714	0.646	0.680	0.673	0.725	---
	33.3	1-5/16	19	3/4	C _v	0.850	1.35	1.87	2.42	3.64	5.54	8.22	11.9	16.6	21.8	0.95
					K _v	0.735	1.17	1.62	2.09	3.15	4.79	7.11	10.3	14.4	18.9	---
					X _T	0.858	0.827	0.846	0.800	0.810	0.675	0.644	0.696	0.727	0.760	---
3	73.0	2-7/8	38	1-1/2	C _v	4.16	6.90	10.4	14.7	21.2	32.6	49.3	73.3	101	128	0.85
					K _v	3.60	5.97	9.00	12.7	18.3	28.2	42.6	63.4	87.4	111	---
					X _T	0.718	0.867	0.770	0.743	0.766	0.712	0.683	0.687	0.671	0.670	---
	47.6	1-7/8	19	3/4	C _v	1.48	2.44	3.47	4.87	7.31	10.9	16.7	24.5	33.0	41.3	0.91
					K _v	1.28	2.11	3.00	4.21	6.32	9.43	14.4	21.2	28.5	35.7	---
					X _T	0.713	0.737	0.747	0.780	0.749	0.744	0.733	0.704	0.720	0.749	---
4	87.3	3-7/16	38	1-1/2	C _v	3.63	6.33	9.32	13.9	21.0	32.9	52.5	81.7	115	148	0.84
					K _v	3.14	5.48	8.06	12.0	18.2	28.5	45.4	70.7	99.5	128	---
					X _T	0.839	0.776	0.784	0.799	0.793	0.699	0.776	0.724	0.697	0.691	---
	58.7	2-5/16	29	1-1/8	C _v	1.94	3.36	4.81	6.76	10.7	16.4	25.0	36.8	51.4	67.6	0.91
					K _v	1.68	2.91	4.16	5.85	9.26	14.2	21.6	31.8	44.5	58.5	---
					X _T	0.693	0.694	0.692	0.794	0.792	0.724	0.694	0.676	0.692	0.692	---
6	111.1	4-3/8	51	2	C _v	5.21	10.3	16.9	28.0	45.6	73.5	121	184	251	310	0.84
					K _v	4.51	8.91	14.6	24.2	39.4	63.6	105	159	217	268	---
					X _T	0.968	0.846	0.801	0.794	0.769	0.770	0.728	0.712	0.687	0.690	---
	73.0	2-7/8	38	1-1/2	C _v	4.12	7.27	10.5	14.6	21.4	32.1	47.9	71.3	97.0	126	0.90
					K _v	3.56	6.29	9.08	12.6	18.5	27.8	41.4	61.7	83.9	109	---
					X _T	0.728	0.763	0.772	0.790	0.778	0.774	0.778	0.750	0.777	0.776	---

1. At 100% travel.
 Restricted trim.



Whisper Trim I															Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel									
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100
1	33.3	1-5/16	19	3/4	C _V	2.30	5.62	8.95	12.5	15.6	17.6	20.7	22.8	24.5	25.5
					K _V	1.99	4.86	7.74	10.8	13.5	15.2	17.9	19.7	21.2	22.1
					X _T	0.351	0.377	0.395	0.423	0.419	0.448	0.448	0.467	0.484	0.498
2	47.6	1-7/8	19	3/4	C _V	4.77	10.6	18.8	26.9	33.2	39.2	44.0	48.8	52.9	56.1
					K _V	4.13	9.17	16.3	23.3	28.7	33.9	38.1	42.2	45.8	48.5
					X _T	0.794	0.635	0.409	0.341	0.335	0.339	0.363	0.372	0.383	0.384
3	73.0	2-7/8	38	1-1/2	C _V	12.8	33.9	56.6	76.4	96.3	114	130	143	156	164
					K _V	11.1	29.3	49.0	66.1	83.3	98.6	112	124	135	142
					X _T	0.638	0.471	0.350	0.332	0.317	0.326	0.331	0.349	0.361	0.377
4	87.3	3-7/16	38	1-1/2	C _V	19.2	49.3	77.6	105	130	153	175	193	209	223
					K _V	16.6	42.6	67.1	90.8	112	132	151	167	181	193
					X _T	0.478	0.402	0.371	0.324	0.317	0.336	0.348	0.364	0.385	0.394
6	111.1	4-3/8	51	2	C _V	31.7	77.5	123	173	214	242	286	313	341	352
					K _V	27.4	67.0	106	150	185	209	247	271	295	304
					X _T	0.292	0.318	0.350	0.318	0.320	0.347	0.347	0.377	0.377	0.389

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

June 2013 - Page EAS-5

Micro-Flat Anti-Cavitation Plug and Seat

CL150, 300, 600, Micro-Flat Anti-Cavitation Plug & Seat, Flow Down with or without Liner														Linear Characteristic		
Valve Size	Port Diameter (1)		Travel		Flow Coeffi- cient	Percent of Total Travel										FL(3)
NPS	mm	inch	mm	inch		10(2)	20	30	40	50	60	70	80	90	100	
1, 2	6.4	1/4	19	3/4	Cv	0.001	0.001	0.003	0.007	0.012	0.017	0.023	0.03	0.037	0.044	0.775
					Kv	0.0009	0.001	0.003	0.006	0.010	0.015	0.020	0.026	0.032	0.038	
					Cv	0.001	0.003	0.02	0.046	0.078	0.114	0.154	0.197	0.243	0.292	0.775
					Kv	0.0009	0.003	0.017	0.040	0.067	0.098	0.133	0.170	0.209	0.252	
	9.5	3/8	19	3/4	Cv	0.001	0.005	0.03	0.068	0.115	0.169	0.229	0.294	0.364	0.437	0.775
					Kv	0.0009	0.004	0.026	0.059	0.099	0.146	0.197	0.253	0.314	0.377	
					Cv	0.001	0.008	0.06	0.136	0.23	0.337	0.457	0.587	0.726	0.873	0.775
					Kv	0.0009	0.007	0.052	0.117	0.198	0.290	0.394	0.506	0.626	0.753	
	12.7	1/2	19	3/4	Cv	0.001	0.016	0.12	0.275	0.465	0.684	0.926	1.188	1.468	1.764	0.775
					Kv	0.0009	0.014	0.103	0.237	0.401	0.590	0.798	1.024	1.265	1.521	
	19.1	3/4	19	3/4	Cv	0.002	0.03	0.229	0.524	0.887	1.306	1.77	2.274	2.813	3.383	0.775
					Kv	0.0017	0.026	0.197	0.452	0.765	1.126	1.526	1.960	2.425	2.916	
			29	1-1/8	Cv	0.002	0.152	0.463	0.868	1.344	1.879	2.365	3.093	3.759	4.458	0.775
					Kv	0.0017	0.131	0.399	0.748	1.159	1.620	2.039	2.666	3.240	3.843	
2	25.4	1	29	1 1/8	Cv	0.002	0.265	0.81	1.519	2.353	3.291	4.316	5.416	6.583	7.809	0.775
					Kv	0.0017	0.228	0.698	1.309	2.028	2.837	3.720	4.669	5.675	6.731	
	28.6	1-1/8	29	1 1/8	Cv	0.003	0.357	1.091	2.044	3.167	4.426	5.803	7.281	8.846	10.488	0.775
					Kv	0.0026	0.308	0.940	1.762	2.730	3.815	5.002	6.276	7.625	9.041	
1. Micro-Flat Cavitation trims use a shutoff port diameter which is 0.125 inch larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 2. Clearance flow only 3. At 100% travel																



The EAS valve (Flow Down) has flow coefficients identical to the EAD valve. Refer to the EAD coefficients. For additional EAS valve body information, refer to Bulletin 51.1:ES.

The Design EAT valve ("Flow Down") has flow coefficients identical to the Design EAD valve. Refer to the Design EAD coefficients. For additional Design EAT valve body information, refer to Bulletin 51.1:ET.

Quick Opening																Quick Opening Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coeff- cient	Coeffs for 6 mm (0.25 In) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
1 & 1-1/4	33.3	1.3125	19	0.75	C _V	14.7	4.86	9.39	13.4	16.9	18.9	20.3	21.1	21.8	21.9	22.1	0.81
					K _V	12.7	4.20	8.12	11.6	14.6	16.3	17.6	18.3	18.9	18.9	19.1	---
					X _T	0.703	0.556	0.744	0.724	0.666	0.626	0.584	0.566	0.549	0.554	0.556	---
1-1/2	47.6	1.875	19	0.75	C _V	22.6	7.79	14.4	20.5	26.8	32.0	36.6	39.4	41.3	42.7	44.0	0.79
					K _V	19.5	6.74	12.5	17.7	23.2	27.7	31.7	34.1	35.7	36.9	38.1	---
					X _T	0.679	0.494	0.641	0.682	0.680	0.686	0.661	0.649	0.638	0.616	0.597	---
	33.3	1.3125	19	0.75	F _d	---	0.22	0.28	0.32	0.34	0.35	0.36	0.36	0.36	0.36	0.36	---
					C _V	16.2	5.05	9.99	14.7	20.0	24.0	25.7	26.2	27.4	28.6	29.9	0.88
					K _V	14.0	4.37	8.64	12.7	17.3	20.8	22.2	22.7	23.7	24.7	25.9	---
2	58.7	2.3125	29	1.125	X _T	0.942	0.803	0.904	0.946	0.872	0.838	0.849	0.874	0.832	0.795	0.756	---
					C _V	29.7	13.4	26.8	39.9	51.3	62.9	70.6	73.7	75.6	76.8	77.6	0.77
					K _V	25.7	11.6	23.2	34.5	44.4	54.4	61.1	63.8	65.4	66.4	67.1	---
	33.3	1.3125	19	0.75	X _T	0.773	0.605	0.695	0.737	0.761	0.703	0.658	0.641	0.635	0.626	0.623	---
					F _d	---	0.24	0.30	0.33	0.35	0.36	0.36	0.36	0.36	0.36	0.36	---
					C _V	16.7	4.80	9.58	14.9	20.2	25.7	29.3	31.2	31.2	31.2	31.2	0.87
2-1/2	73.0	2.875	38	1.5	K _V	14.4	4.15	8.29	12.9	17.5	22.2	25.3	27.0	27.0	27.0	27.0	---
					X _T	0.705	0.578	0.733	0.695	0.698	0.666	0.689	0.735	0.791	0.805	0.805	---
					C _V	33.4	20.9	39.6	58.8	74.2	84.9	97.0	103	106	108	109	0.81
	47.6	1.875	19	0.75	K _V	28.9	18.1	34.3	50.9	64.2	73.4	83.9	89.1	91.7	93.4	94.3	---
					X _T	0.635	0.601	0.684	0.738	0.767	0.744	0.689	0.669	0.658	0.660	0.652	---
					F _d	---	0.25	0.31	0.34	0.35	0.36	0.36	0.36	0.36	0.36	0.35	---
3	87.3	3.4375	38	1.5	C _V	25.3	7.83	15.2	22.8	31.0	40.0	48.3	54.9	60.3	66.4	71.2	0.86
					K _V	21.9	6.77	13.1	19.7	26.8	34.6	41.8	47.5	52.2	57.4	61.6	---
					X _T	0.642	0.498	0.618	0.627	0.636	0.640	0.669	0.725	0.758	0.737	0.710	---
	58.7	2.3125	29	1.125	C _V	43.6	27.2	52.2	77.9	99.5	124	140	149	154	158	161	0.77
					K _V	37.7	23.5	45.2	67.4	86.1	107	121	129	133	137	139	---
					X _T	0.635	0.626	0.671	0.745	0.796	0.703	0.657	0.619	0.602	0.591	0.577	---
3	58.7	2.3125	29	1.125	F _d	---	0.22	0.29	0.32	0.34	0.35	0.36	0.36	0.36	0.36	0.36	---
					C _V	35.2	15.9	31.7	47.2	60.7	74.4	83.6	87.3	89.5	91.0	91.9	0.86
					K _V	30.4	13.8	27.4	40.8	52.5	64.4	72.3	75.5	77.4	78.7	79.5	---
3	58.7	2.3125	29	1.125	X _T	0.852	0.718	0.837	0.889	0.905	0.842	0.784	0.763	0.760	0.744	0.744	---
1. When using Fisher 655-ED or 655-ET as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch).																	
2. When using self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.																	
3. At 100% travel.																	
Restricted trim.																	

1. When using Fisher 655-ED or 655-ET as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch).

2. When using self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.

3. At 100% travel.

Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR.



Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coefficient	Coeffs for 6 mm (0.25 in) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
4	111.1	4.375	51	2	C _v	45.9	37.7	75.0	125	163	193	220	238	247	251	251	0.79
					K _v	39.7	32.6	64.9	108	141	167	190	206	214	217	217	---
					X _T	0.607	0.623	0.689	0.733	0.764	0.762	0.723	0.689	0.669	0.683	0.694	---
					F _d	---	0.22	0.27	0.29	0.31	0.31	0.31	0.31	0.31	0.31	0.30	---
	73.0	2.875	38	1.5	C _v	39.8	25.0	47.2	70.1	88.5	101	116	123	127	129	130	0.89
					K _v	34.4	21.6	40.8	60.6	76.6	87.4	100	106	110	112	112	---
					X _T	0.841	0.707	0.879	0.948	0.989	0.956	0.875	0.851	0.834	0.840	0.834	---
6 ⁽⁴⁾	177.8	7	51	2	C _v	92.0	73.6	150	232	306	353	389	416	441	451	460	0.82
					K _v	79.6	63.7	130	201	265	305	336	360	381	390	398	---
					X _T	0.660	0.664	0.651	0.667	0.694	0.722	0.742	0.728	0.723	0.719	0.710	---
					F _d	---	0.17	0.22	0.25	0.26	0.27	0.28	0.28	0.28	0.28	0.28	---
	111.1	4.375	51	2	C _v	64.9	52.3	101	150	199	247	284	310	329	345	358	0.87
					K _v	56.1	45.2	87.4	130	172	214	246	268	285	298	310	---
					X _T	0.758	0.774	0.763	0.771	0.778	0.763	0.761	0.717	0.699	0.707	0.691	---
8	203.2	8	51	2	C _v	108	80.3	188	290	389	480	554	615	658	705	744	0.87
					K _v	93.4	69.5	163	251	336	415	479	532	569	610	644	---
					X _T	0.653	0.670	0.628	0.679	0.731	0.766	0.806	0.829	0.859	0.863	0.866	---
					F _d	---	0.19	0.24	0.26	0.27	0.28	0.28	0.28	0.28	0.28	0.27	---
8	203.2	8	76	3	C _v	108	135	291	434	551	639	706	759	807	841	863	0.85
					K _v	93.4	117	252	375	477	553	611	657	698	727	746	---
					X _T	0.653	0.643	0.699	0.757	0.807	0.838	0.861	0.857	0.841	0.838	0.827	---
					F _d	---	0.19	0.24	0.26	0.27	0.28	0.28	0.28	0.28	0.28	0.27	---

1. When using Fisher 655-ED or 655-ET as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch).
 2. When using self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.
 3. At 100% travel.
 4. NPS 8 EAD/EAT valves use the same C_v values for sizing as NPS 6 ED valves with 177.8 mm (7 inch) port.
 Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR.

Catalog 12

March 2012 - Page ED-3

Linear Cage

Linear																Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel ⁽²⁾		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100		
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	3.21	5.50	8.18	10.9	13.2	15.0	16.9	18.6	19.9	20.6	0.84	
					K _v	2.78	4.76	7.08	9.43	11.4	13.0	14.6	16.1	17.2	17.8	---	
					X _T	0.340	0.644	0.494	0.509	0.532	0.580	0.610	0.629	0.628	0.636	---	
1-1/2	47.6	1.875	19	0.75	C _v	4.23	7.84	11.8	15.8	20.4	25.3	30.3	34.7	37.2	39.2	0.82	
					K _v	3.66	6.78	10.2	13.7	17.6	21.9	26.2	30.0	32.2	33.9	---	
					X _T	0.656	0.709	0.758	0.799	0.738	0.729	0.708	0.686	0.683	0.656	---	
					F _d	0.30	0.37	0.41	0.44	0.44	0.41	0.38	0.35	0.34	0.34	---	
	33.3	1.3125	19	0.75	C _v	2.92	5.70	9.05	12.5	15.6	18.5	21.1	23.9	26.8	29.2	0.91	
					K _v	2.53	4.93	7.83	10.8	13.5	16.0	18.3	20.7	23.2	25.3	---	
2	58.7	2.3125	29	1.125	C _v	7.87	16.0	24.9	33.4	42.1	51.8	62.0	68.1	70.6	72.9	0.77	
					K _v	6.81	13.8	21.5	28.9	36.4	44.8	53.6	58.9	61.1	63.1	---	
					X _T	0.641	0.720	0.728	0.767	0.793	0.754	0.683	0.658	0.652	0.638	---	
					F _d	0.30	0.35	0.36	0.37	0.37	0.36	0.35	0.35	0.34	0.33	---	
	33.3	1.3125	19	0.75	C _v	3.53	6.36	9.92	13.3	16.5	19.7	22.7	25.6	29.3	33.3	0.87	
					K _v	3.05	5.50	8.58	11.5	14.3	17.0	19.6	22.1	25.3	28.8	---	
2-1/2	73.0	2.875	38	1.5	C _v	9.34	21.6	35.5	49.5	62.7	74.1	83.6	93.5	102	108	0.81	
					K _v	8.08	18.7	30.7	42.8	54.2	64.1	72.3	80.9	88.2	93.4	---	
					X _T	0.680	0.660	0.644	0.669	0.674	0.706	0.716	0.687	0.658	0.641	---	
					F _d	0.27	0.33	0.35	0.36	0.35	0.34	0.32	0.29	0.27	0.27	---	
	47.6	1.875	19	0.75	C _v	4.10	8.09	12.3	16.7	21.1	26.8	33.7	41.3	49.2	57.0	0.84	
					K _v	3.55	7.00	10.6	14.4	18.3	23.2	29.2	35.7	42.6	49.3	---	
3	87.3	3.4375	38	1.5	C _v	14.5	32.9	52.1	70.4	88.5	105	118	133	142	148	0.82	
					K _v	12.5	28.5	45.1	60.9	76.6	90.8	102	115	123	128	---	
					X _T	0.671	0.699	0.697	0.720	0.733	0.718	0.707	0.650	0.630	0.620	---	
					F _d	0.26	0.32	0.35	0.36	0.36	0.36	0.36	0.28	0.29	0.30	---	
	58.7	2.3125	29	1.125	C _v	8.06	16.9	26.7	37.5	49.0	61.4	73.8	85.3	94.7	102	0.85	
					K _v	6.97	14.6	23.1	32.4	42.4	53.1	63.8	73.8	81.9	88.2	---	
4	111.1	4.375	51	2	C _v	23.3	50.3	78.1	105	127	152	181	203	223	236	0.82	
					K _v	20.2	43.5	67.6	90.8	110	131	157	176	193	204	---	
					X _T	0.691	0.714	0.720	0.731	0.764	0.757	0.748	0.762	0.732	0.688	---	
					F _d	0.31	0.36	0.38	0.38	0.37	0.35	0.32	0.30	0.27	0.28	---	
	73.0	2.875	38	1.5	C _v	9.77	22.6	37.2	51.8	65.7	77.5	87.5	97.9	107	113	0.84	
					K _v	8.45	19.5	32.2	44.8	56.8	67.0	75.7	84.7	92.6	97.7	---	
						X _T	0.926	0.899	0.873	0.904	0.919	0.962	0.972	0.937	0.891	0.872	---

1. At 100% travel.
2. If coefficients listed above for the NPS 8 linear cage with 51 mm (2-inch) travel are not sufficient for your application, consider using the quick opening cage. The NPS 8 quick opening cage with 51 mm (2-inch) travel has approximately a linear characteristic.

Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 3 through 8 also apply to Fisher ET-C valves.



Valve Size, NPS	Port Diameter		Maximum Travel(2)		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
6 ⁽³⁾	177.8	7	51	2	C _v	46.3	107	171	228	279	327	367	402	420	433	0.84
					K _v	40.0	92.6	148	197	241	283	317	348	363	375	---
					X _T	0.656	0.727	0.744	0.781	0.803	0.800	0.784	0.758	0.755	0.740	---
					F _d	0.21	0.26	0.29	0.30	0.31	0.31	0.31	0.28	0.28	0.28	---
	111.1	4.375	51	2	C _v	16.7	38.6	65.4	93.7	123	156	194	244	290	322	0.88
					K _v	14.4	33.4	56.6	81.1	106	135	168	211	251	279	---
					X _T	0.762	0.698	0.675	0.684	0.681	0.660	0.676	0.657	0.685	0.703	---
8 ⁽²⁾	203.2	8	51	2	C _v	60.2	129	206	285	363	444	526	581	640	688	0.87
					K _v	52.1	112	178	247	314	384	455	503	554	595	---
					X _T	0.704	0.721	0.657	0.651	0.683	0.713	0.740	0.801	0.821	0.839	---
8	203.2	8	76	3	C _v	91.4	207	325	440	550	639	711	760	795	846	0.87
					K _v	79.1	179	281	381	476	553	615	657	688	732	---
					X _T	0.651	0.624	0.677	0.746	0.786	0.803	0.823	0.836	0.843	0.807	---
					F _d	0.23	0.28	0.30	0.31	0.31	0.31	0.31	0.31	0.31	0.31	---

1. At 100% travel.
 2. If coefficients listed above for the NPS 8 linear cage with 51 mm (2-inch) travel are not sufficient for your application, consider using the quick opening cage. The NPS 8 quick opening cage with 51 mm (2-inch) travel has approximately a linear characteristic.
 3. NPS 8 EAD/EAT valves use the same C_v values for sizing as NPS 6 ED valves with 177.8 mm (7 inch) port.
 Restricted trim.


Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 3 through 8 also apply to Fisher ET-C valves.

Catalog 12

March 2012 - Page ED-5

Equal Percentage Cage
Flow Down

Equal Percentage																Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	0.783	1.54	2.20	2.89	4.21	5.76	7.83	10.9	14.1	17.2	0.88
					K _v	0.677	1.33	1.90	2.50	3.64	4.98	6.77	9.43	12.2	14.9	---
					X _T	0.766	0.614	0.587	0.667	0.672	0.687	0.743	0.760	0.733	0.667	---
1-1/2	47.6	1.875	19	0.75	C _v	1.52	2.63	3.87	5.41	7.45	11.2	17.4	24.5	30.8	35.8	0.84
					K _v	1.31	2.27	3.35	4.68	6.44	9.69	15.1	21.2	26.6	31.0	---
					X _T	0.780	0.735	0.716	0.715	0.738	0.727	0.690	0.685	0.685	0.679	---
					F _d	0.64	0.63	0.63	0.64	0.46	0.45	0.30	0.31	0.35	0.38	---
	33.3	1.3125	19	0.75	C _v	1.12	1.56	2.22	3.10	4.27	6.17	9.01	13.1	18.2	23.1	0.91
					K _v	0.969	1.35	1.92	2.68	3.69	5.34	7.79	11.3	15.7	20.0	---
2	58.7	2.3125	29	1.125	C _v	1.66	2.93	4.66	6.98	10.8	16.5	25.4	37.3	50.7	59.7	0.85
					K _v	1.44	2.53	4.03	6.04	9.34	14.3	22.0	32.3	43.9	51.6	---
					X _T	0.827	0.834	0.774	0.727	0.687	0.684	0.702	0.736	0.686	0.687	---
					F _d	0.41	0.50	0.53	0.58	0.37	0.32	0.27	0.26	0.29	0.31	---
	33.3	1.3125	19	0.75	C _v	0.923	1.42	2.09	2.84	4.11	5.83	8.58	12.8	18.5	24.3	0.88
					K _v	0.798	1.23	1.81	2.46	3.56	5.04	7.42	11.1	16.0	21.0	---
2-1/2	73.0	2.875	38	1.5	C _v	3.43	7.13	10.8	15.1	22.4	33.7	49.2	71.1	89.5	99.4	0.84
					K _v	2.97	6.17	9.34	13.1	19.4	29.2	42.6	61.5	77.4	86.0	---
					X _T	0.778	0.702	0.678	0.677	0.658	0.654	0.661	0.665	0.661	0.660	---
					F _d	0.45	0.49	0.49	0.47	0.35	0.32	0.30	0.24	0.25	0.27	---
	47.6	1.875	19	0.75	C _v	1.57	2.57	3.82	5.44	7.64	11.5	18.2	26.7	35.1	43.9	0.89
					K _v	1.36	2.22	3.30	4.71	6.61	9.95	15.7	23.1	30.4	38.0	---
3	87.3	3.4375	38	1.5	C _v	4.32	7.53	10.9	17.1	27.2	43.5	66.0	97.0	120	136	0.82
					K _v	3.74	6.51	9.43	14.8	23.5	37.6	57.1	83.9	104	118	---
					X _T	0.774	0.706	0.682	0.635	0.616	0.602	0.663	0.693	0.670	0.675	---
					F _d	0.52	0.63	0.68	0.39	0.36	0.29	0.26	0.28	0.30	0.32	---
	58.7	2.3125	29	1.125	C _v	1.75	3.11	4.77	7.07	10.7	17.0	27.9	41.5	58.0	70.7	0.87
					K _v	1.51	2.69	4.13	6.12	9.26	14.7	24.1	35.9	50.2	61.2	---
4	111.1	4.375	51	2	X _T	0.944	0.840	0.803	0.757	0.735	0.642	0.531	0.613	0.629	0.702	---
					C _v	5.85	11.6	18.3	30.2	49.7	79.7	125	171	205	224	0.82
					K _v	5.06	10.0	15.8	26.1	43.0	68.9	108	148	177	194	---
					X _T	0.731	0.650	0.643	0.645	0.632	0.625	0.672	0.742	0.737	0.716	---
	73.0	2.875	38	1.5	F _d	0.45	0.42	0.40	0.33	0.30	0.28	0.23	0.24	0.26	0.28	---
					C _v	3.82	7.65	11.4	16.9	25.5	38.2	60.5	85.7	105	112	0.89
4	73.0	2.875	38	1.5	K _v	3.30	6.62	9.86	14.6	22.1	33.0	52.3	74.1	90.8	96.9	---
					X _T	0.746	0.700	0.694	0.669	0.640	0.627	0.591	0.644	0.735	0.813	---

1. At 100% travel.
 Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 3 through 8 also apply to Fisher ET-C valves.



ED CL125 - CL600

Equal Percentage Cage
Flow Down

Catalog 12
March 2012 - Page ED-6

Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
6 ⁽²⁾	177.8	7	51	2	C _v	12.9	25.8	43.3	67.4	104	162	239	316	368	394	0.85
					K _v	11.2	22.3	37.5	58.3	90.0	140	207	273	318	341	---
					X _T	0.688	0.680	0.682	0.709	0.700	0.720	0.736	0.744	0.780	0.778	---
					F _d	0.39	0.44	0.47	0.33	0.29	0.22	0.22	0.24	0.25	0.26	---
	111.1	4.375	51	2	C _v	5.40	10.1	15.8	26.7	45.2	71.2	111	169	232	274	0.88
					K _v	4.67	8.74	13.7	23.1	39.1	61.6	96.0	146	201	237	---
					X _T	0.834	0.834	0.735	0.654	0.626	0.613	0.614	0.610	0.629	0.695	---
8	203.2	8	51	2	C _v	18.5	38.0	58.4	86.7	130	189	268	371	476	567	0.85
					K _v	16.0	32.9	50.5	75.0	112	163	232	321	412	490	---
					X _T	0.727	0.623	0.600	0.588	0.580	0.587	0.599	0.611	0.671	0.724	---
8	203.2	8	76	3	C _v	27.0	58.1	105	188	307	478	605	695	761	818	0.86
					K _v	23.4	50.3	90.8	163	266	413	523	601	658	708	---
					X _T	0.644	0.654	0.636	0.611	0.643	0.615	0.725	0.809	0.804	0.807	---
					F _d	0.28	0.26	0.23	0.20	0.17	0.22	0.24	0.25	0.25	0.26	---

1. At 100% travel.
2. NPS 8 EAD/EAT valves use the same C_v values for sizing as NPS 6 ED valves with 177.8 mm (7 inch) port.
Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 3 through 8 also apply to Fisher ET-C valves.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 1988, 2012 Fisher Controls International LLC. All rights reserved



Catalog 12

July 2012 - Page ED-7

Whisper Trim™ I Cage
Flow Up

Whisper Trim I															Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel									
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	3.28	7.39	12.0	14.2	14.9	15.3	15.7	16.0	16.4	16.8
					K _v	2.84	6.39	10.4	12.3	12.9	13.2	13.6	13.8	14.2	14.5
					X _T	0.581	0.605	0.617	0.644	0.764	0.790	0.809	0.813	0.795	0.768
1-1/2	47.6	1.875	19	0.75	C _v	2.62	7.42	13.9	20.8	23.2	24.2	24.9	25.4	26.1	26.7
					K _v	2.27	6.42	12.0	18.0	20.1	20.9	21.5	22.0	22.6	23.1
					X _T	0.892	0.766	0.632	0.498	0.614	0.771	0.876	0.919	0.901	0.894
	33.3	1.3125	19	0.75	C _v	3.12	7.36	13.0	18.5	20.7	21.4	21.8	23.1	23.9	25.2
					K _v	2.70	6.37	11.2	16.0	17.9	18.5	18.9	20.0	20.7	21.8
					X _T	0.559	0.605	0.460	0.383	0.472	0.622	0.768	0.823	0.874	0.857
2	58.7	2.3125	29	1.125	C _v	7.30	19.2	34.6	42.2	45.5	47.0	47.1	47.2	47.2	48.0
					K _v	6.31	16.6	29.9	36.5	39.4	40.7	40.7	40.8	40.8	41.5
					X _T	0.604	0.467	0.318	0.387	0.526	0.689	0.843	0.899	0.940	0.938
	33.3	1.3125	19	0.75	C _v	2.86	6.79	11.7	18.4	23.6	27.9	30.9	33.5	35.3	36.7
					K _v	2.47	5.87	10.1	15.9	20.4	24.1	26.7	29.0	30.5	31.7
					X _T	0.672	0.755	0.547	0.386	0.358	0.377	0.398	0.431	0.470	0.483
2-1/2	73.0	2.875	38	1.5	C _v	12.2	32.6	49.7	54.4	55.9	59.8	64.0	67.7	71.4	74.0
					K _v	10.6	28.2	43.0	47.1	48.4	51.7	55.4	58.6	61.8	64.0
					X _T	0.748	0.428	0.414	0.589	0.792	0.877	0.857	0.792	0.712	0.719
	47.6	1.875	19	0.75	C _v	3.11	8.31	14.9	22.4	29.9	36.0	41.6	46.4	50.5	53.6
					K _v	2.69	7.19	12.9	19.4	25.9	31.1	36.0	40.1	43.7	46.4
					X _T	0.603	0.761	0.596	0.467	0.397	0.395	0.398	0.411	0.427	0.439
3	87.3	3.4375	38	1.5	C _v	16.5	40.3	70.8	88.0	92.1	90.7	90.3	92.6	95.6	99.1
					K _v	14.3	34.9	61.2	76.1	79.7	78.5	78.1	80.1	82.7	85.7
					X _T	0.685	0.471	0.331	0.378	0.532	0.753	0.929	0.983	0.968	0.923
	58.7	2.3125	29	1.125	C _v	8.15	19.1	33.2	47.6	60.8	72.1	81.8	90.1	97.4	103
					K _v	7.05	16.5	28.7	41.2	52.6	62.4	70.8	77.9	84.3	89.1
					X _T	0.720	0.660	0.500	0.439	0.406	0.412	0.437	0.472	0.504	0.510
4	111.1	4.375	51	2	C _v	33.9	76.6	117	135	137	137	141	149	157	169
					K _v	29.3	66.3	101	117	119	119	122	129	136	146
					X _T	0.607	0.385	0.352	0.467	0.682	0.887	0.977	0.958	0.921	0.811
	73.0	2.875	38	1.5	C _v	13.6	32.5	54.3	75.5	94.6	112	127	141	153	160
					K _v	11.8	28.1	47.0	65.3	81.8	96.9	110	122	132	138
					X _T	0.674	0.481	0.374	0.344	0.345	0.354	0.370	0.385	0.407	0.428
6 ⁽²⁾	177.8	7	51	2	C _v	55.8	125	196	245	270	286	297	308	323	338
					K _v	48.3	108	170	212	234	247	257	266	279	292
					X _T	0.294	0.323	0.286	0.322	0.406	0.494	0.579	0.644	0.673	0.662
8	203.2	8	76	3	C _v	100	226	337	436	502	581	641	655	659	681
					K _v	86.5	195	292	377	434	503	554	567	570	589
					X _T	0.456	0.490	0.470	0.427	0.452	0.468	0.521	0.624	0.703	0.701
			102	4	C _v	142	303	428	542	611	652	669	689	700	726
					K _v	123	262	370	469	529	564	579	596	606	628
					X _T	0.549	0.450	0.436	0.441	0.513	0.624	0.707	0.709	0.729	0.718
1. NPS 6 easy-e with restricted Whisper Trim not available. Use EW valve body where this trim is desired. 2. These values are also used to size NPS 8 EAD/EAT valves. Restricted trim.															

1. NPS 6 easy-e with restricted Whisper Trim not available. Use EW valve body where this trim is desired.

2. These values are also used to size NPS 8 EAD/EAT valves.

Restricted trim.

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 3 through 6 also apply to Fisher ET-C valves.



Whisper Trim III																	Linear Characteristic ⁽²⁾
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											X _T ⁽¹⁾
	mm	Inches	mm	Inches		Minimum	10	20	30	40	50	60	70	80	90	100	
A3 ΔP/P ₁ ≤0.6																	
6 ⁽³⁾	136.5	5.375	76	3	C _v	4.67	17.8	67.6	126	176	216	246	267	281	290	295	0.722
					K _v	4.04	15.4	58.5	109	152	187	213	231	243	251	255	---
B3 ΔP/P ₁ ≤0.75																	
6 ⁽³⁾	136.5	5.375	76	3	C _v	4.67	12.6	38.2	66.9	94.5	120	144	167	190	211	228	0.473
					K _v	4.04	10.9	33.0	57.9	81.7	104	125	144	164	183	197	---
C3 ΔP/P ₁ ≤0.85																	
6 ⁽³⁾	136.5	5.375	76	3	C _v	4.67	11	28.0	41.3	55.3	69.3	83.0	97.0	110	124	138	0.563
					K _v	4.04	9.5	24.2	35.7	47.8	59.9	71.8	83.9	95.2	107	119	---
D3 ΔP/P ₁ ≤0.99																	
6 ⁽³⁾	136.5	5.375	76	3	C _v	4.67	5.1	6.67	9.50	19.9	31.4	46.0	61.0	75.7	89.7	104	0.563
					K _v	4.04	4.4	5.77	8.22	17.2	27.2	39.8	52.8	65.5	77.6	90.0	---
1. This column lists X _T factors for Whisper Trim III cages at 100% travel. 2. Level D exhibits an equal percentage characteristic for the first 38 mm (1.5 inches) of travel, then linear characteristics. 3. These values are also used to size NPS 8 EAD/EAT valves.																	

WhisperFlo™ Level X																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches		Min	10	20	30	40	50	60	70	80	90	100
4	87.3	3.4375	76	3	C _v	6.4	12.7	27.8	41.9	55.4	68.5	81.4	91.9	101	108	114
					X _T	0.654	0.654	0.753	0.737	0.727	0.714	0.708	0.732	0.76	0.831	0.842
6 ⁽¹⁾	136.5	5.375	76	3	C _v	10.4	20.7	47.3	70.4	94.6	116	137	159	175	189	199
					X _T	0.638	0.638	0.673	0.716	0.688	0.692	0.723	0.708	0.735	0.747	0.77
8	177.8	7	152	6	C _v	30.4	60.9	120	179	237	287	331	368	397	421	441
					X _T	0.702	0.702	0.704	0.669	0.647	0.668	0.699	0.74	0.783	0.809	0.829
WhisperFlo Level Y																Linear Characteristic
4	87.3	3.4375	76	3	C _v	6	12	23	35	47	59	70	82	94	105	117
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
6 ⁽¹⁾	136.5	5.375	76	3	C _v	9	18	36	55	73	91	109	127	146	164	182
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
8	177.8	7	152	6	C _v	11	42	84	125	167	209	251	293	334	376	418
					X _T	0.51	0.51	0.543	0.547	0.536	0.46	0.496	0.496	0.514	0.547	0.609
WhisperFlo Level Z																Linear Characteristic
4	87.3	3.4375	76	3	C _v	3	6	13	19	25	32	38	44	50	57	63
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.526	0.507	0.525
6 ⁽¹⁾	136.5	5.375	76	3	C _v	5	10	20	30	40	51	61	71	81	91	101
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
8	177.8	7	152	6	C _v	7	26	52	78	104	130	156	182	208	234	260
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
1. These values are also used to size NPS 8 EAD/EAT valves.																

Notes: The coefficients shown on this page are also appropriate for Fisher EDR, ET, and ETR. The full-size port coefficients for NPS 4 through 8 also apply to Fisher ET-C valves.

Linear																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L (1)	
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90		100
12	279.4	11	102	4	SNC	C _v	40	155	300	450	610	770	940	1100	1250	1390	1500	0.88
						K _v	34.6	134	260	389	528	666	813	952	1081	1202	1298	---
						X _t	0.391	0.609	0.678	0.676	0.645	0.654	0.693	0.746	0.789	0.799	0.792	---
			140	5.5		C _v	40	206	415	630	852	1079	1295	1465	1557	1570	1570	0.88
						K _v	34.6	178	359	545	737	933	1120	1267	1347	1358	1358	---
						X _t	0.391	0.644	0.683	0.644	0.654	0.704	0.769	0.792	0.775	0.818	0.82	---
14	279.4	11	102	4	SNC	C _v	40	106	222	368	541	727	922	1109	1283	1437	1560	0.88
						K _v	34.6	92	192	319	468	629	797	959	1110	1243	1350	---
						X _t	0.391	0.837	0.811	0.749	0.703	0.703	0.722	0.748	0.769	0.774	0.777	---
			140	5.5		C _v	40	136	346	552	821	1092	1328	1516	1643	1708	1753	0.88
						K _v	34.6	118	299	477	710	944	1149	1311	1421	1477	1516	---
						X _t	0.391	0.851	0.813	0.736	0.707	0.723	0.752	0.766	0.764	0.782	0.788	---
16	279.4	11	102	4	SNC	C _v	40	73	169	314	495	698	909	1115	1305	1468	1601	0.88
						K _v	34.6	63	146	272	428	604	786	965	1128	1270	1385	---
						X _t	0.391	0.989	0.899	0.797	0.742	0.735	0.741	0.749	0.756	0.758	0.767	---
			140	5.5		C _v	40	90	300	500	800	1100	1350	1550	1700	1800	1875	0.88
						K _v	34.6	78	260	433	692	952	1168	1341	1471	1557	1622	---
						X _t	0.391	0.989	0.899	0.797	0.742	0.735	0.741	0.749	0.756	0.758	0.767	---
30	610	24	302	11.88	SN	C _v	100	906	2000	3080	4230	5290	6690	7710	8450	9260	9530	0.99
						K _v	87	784	1730	2664	3659	4576	5787	6669	7309	8010	8243	---
						X _T		0.7	0.73	0.72	0.75	0.72	0.74	0.71	0.74	0.72	0.71	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only

Equal Percentage																	Equal Percentage	
Characteristic																		
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	C _v	22	43	84	123	182	280	424	618	873	1190	1380	0.88
						K _v	19.0	37	73	106	157	242	367	535	755	1029	1194	---
						X _t	0.391	0.75	0.737	0.715	0.656	0.595	0.57	0.578	0.625	0.692	0.804	---
14	279.4	11	140	5.5	SNC	C _v	22	51	95	139	193	277	406	582	803	1079	1397	0.88
						K _v	19.0	44	82	120	167	240	351	503	695	933	1208	---
						X _t	0.391	0.894	0.891	0.883	0.855	0.788	0.711	0.674	0.696	0.728	0.780	---
16	279.4	11	140	5.5	SNC	C _v	21	58	109	158	220	317	463	664	917	1232	1595	0.88
						K _v	20.3	56.0	105	153	212	306	447	641	885	1189	1539	---
						X _t	0.391	0.99	0.994	0.995	0.987	0.916	0.805	0.738	0.743	0.752	0.764	---
30	610	24	302	11.88	SN	C _v	70	126	305	520	876	1343	2200	3599	5150	6563	7690	0.99
						K _v	61	109	264	450	758	1162	1903	3113	4455	5677	6652	---
						X _T		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.65	0.68	0.7	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Whisper Trim III - Level A1 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	C _v	25	144	295	441	576	696	803	904	991	1070	1137	0.89
						K _v		125	255	381	498	602	695	782	857	926	984	---
						X _t		0.62	0.62	0.62	0.65	0.7	0.75	0.81	0.86	0.86	0.86	---
			203	8	LNC	C _v	25	212	428	622	785	930	1052	1150	1229	1285	1315	0.89
						K _v		183	370	538	679	804	910	995	1063	1112	1137	---
						X _t		0.619	0.620	0.665	0.739	0.827	0.856	0.854	0.852	0.849	0.847	---
14	279.4	11	140	5.5	SNC	C _v	25	144	295	441	584	721	851	981	1104	1225	1318	0.89
						K _v		125	255	381	505	623	736	849	955	1059	1140	---
						X _t		0.62	0.62	0.62	0.63	0.65	0.67	0.70	0.72	0.72	0.73	---
			203	8	LNC	C _v	25	212	428	635	828	1016	1194	1332	1420	1482	1515	0.89
						K _v		183	370	549	716	879	1033	1153	1229	1282	1310	---
						X _t		0.619	0.620	0.639	0.668	0.703	0.715	0.739	0.800	0.823	0.824	---
16	279.4	11	140	5.5	SNC	C _v	25	144	295	441	589	737	883	1033	1179	1328	1439	0.89
						K _v		125	255	381	509	638	764	894	1020	1149	1245	---
						X _t		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.65	---
			203	8	LNC	C _v	25	212	428	644	857	1073	1289	1454	1548	1613	1648	0.89
						K _v		183	370	557	741	928	1115	1258	1339	1395	1425	---
						X _t		0.619	0.620	0.621	0.621	0.621	0.621	0.663	0.765	0.805	0.809	---
30	610	24	276	10.88	SN	C _v	55	684	1400	2118	2837	3555	4271	4687	5132	5519	5850	0.99
						K _v		592	1211	1832	2454	3075	3694	4054	4439	4774	5060	---
						X _T		0.6	0.6	0.6	0.6	0.57	0.54	0.58	0.59	0.61	0.63	---
			505	19.88	LN	C _v	55	1173	2370	3569	4544	5286	5873	6294	6559	6661	6661	0.99
						K _v		1015	2050	3087	3931	4572	5080	5444	5674	5762	5762	---
						X _T		0.6	0.6	0.57	0.57	0.6	0.63	0.67	0.72	0.78	0.78	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only

Catalog 12

March 2012 - Page ED-11

Whisper Trim™ III - Level A3

Whisper Trim - Level A3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	C _v	17	123	253	381	508	617	719	813	901	978	1049	0.89
						K _v		106	219	330	439	534	622	703	779	846	907	---
						X _t		0.62	0.62	0.62	0.62	0.66	0.71	0.76	0.81	0.86	0.86	---
			203	8	LNC	C _v	17	181	371	550	705	839	960	1063	1149	1219	1272	0.89
						K _v		157	321	475	610	726	831	919	994	1055	1100	---
						X _t		0.619	0.620	0.638	0.700	0.769	0.851	0.856	0.854	0.852	0.850	---
14	279.4	11	140	5.5	SNC	C _v	17	123	253	381	509	630	748	863	978	1086	1192	0.89
						K _v		106	219	330	440	545	647	747	846	939	1031	---
						X _t		0.62	0.62	0.62	0.62	0.64	0.66	0.68	0.70	0.72	0.72	---
			203	8	LNC	C _v	17	181	371	554	731	896	1059	1212	1331	1410	1467	0.89
						K _v		157	321	479	632	775	916	1048	1152	1219	1269	---
						X _t		0.62	0.62	0.63	0.65	0.68	0.71	0.72	0.74	0.79	0.82	---
16	279.4	11	140	5.5	SNC	C _v	17	123	253	381	510	638	767	897	1029	1158	1287	0.89
						K _v		106	219	330	441	552	663	776	890	1002	1113	---
						X _t		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	C _v	17	181	371	557	748	934	1125	1311	1453	1537	1597	0.89
						K _v		157	321	482	647	808	973	1134	1256	1329	1381	---
						X _t		0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.663	0.751	0.805	---
30	660	26	276	10.88	SN	C _v	50	594	1214	1833	2453	3073	3692	4312	4650	5043	5392	0.99
						K _v		514	1050	1586	2122	2658	3194	3730	4022	4362	4664	---
						X _T		0.6	0.6	0.6	0.6	0.6	0.56	0.54	0.58	0.59	0.61	---
			505	19.88	LN	C _v	50	1007	2050	3092	4215	4808	5413	5902	6270	6515	6642	0.99
						K _v		871	1773	2675	3568	4159	4682	5105	5424	5635	5745	---
						X _T		0.6	0.6	0.6	0.55	0.58	0.61	0.64	0.57	0.71	0.76	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Whisper Trim - Level B1 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	537	597	659	721	0.89
						Kv		68	136	206	269	332	401	465	516	570	624	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.64	0.66	0.68	0.71	---
			203	8	LNC	Cv	21	120	228	337	453	557	646	730	813	889	949	0.89
						Kv		104	197	291	392	482	559	631	703	769	821	---
						Xt		0.618	0.619	0.620	0.620	0.641	0.675	0.713	0.756	0.803	0.846	---
14	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	541	607	678	751	0.89
						Kv		68	136	206	269	332	401	468	525	586	650	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.64	0.66	---
			203	8	LNC	Cv	21	120	228	337	453	562	663	761	863	962	1044	0.89
						Kv		104	197	292	392	486	573	658	747	832	903	---
						Xt		0.62	0.62	0.62	0.62	0.63	0.64	0.66	0.68	0.69	0.71	---
16	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	543	614	690	771	0.89
						Kv		68	136	206	269	332	401	470	531	597	667	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	21	120	228	337	453	566	674	782	897	1011	1107	0.89
						Kv		104	197	291	392	489	583	676	776	875	958	---
						Xt		0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		

Whisper Trim - Level B3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	528	595	654	716	0.89
						Kv		67	131	199	264	330	396	457	515	566	619	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.66	0.68	0.71	---
			203	8	LNC	Cv	15	114	222	336	445	550	641	728	808	883	942	0.89
						Kv		99	192	291	385	476	554	630	699	764	815	---
						Xt		0.617	0.619	0.62	0.62	0.639	0.674	0.712	0.754	0.799	0.841	---
14	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	531	605	673	745	0.89
						Kv		67	131	199	264	330	396	459	523	582	645	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.64	0.64	0.66	---
			203	8	LNC	Cv	15	114	222	336	445	555	657	759	858	954	1045	0.89
						Kv		99	192	291	385	480	568	657	742	826	904	---
						Xt		0.62	0.62	0.62	0.62	0.63	0.64	0.66	0.67	0.69	0.71	---
16	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	533	612	685	765	0.89
						Kv		67	131	199	264	330	396	461	529	593	662	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	15	114	222	336	445	558	668	780	891	1002	1114	0.89
						Kv		98	192	291	385	483	578	675	771	867	963	---
						Xt		0.617	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		

Catalog 12

March 2012 - Page ED-13

Whisper Trim™ III - Level C1 and C3

Whisper Trim - Level C1 - Flow Up																	Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Construction	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100
12	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	497
						Kv		53	89	138	178	219	266	304	349	393	430
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	18	84	153	222	293	368	444	512	571	628	688
						Kv		73	132	192	253	318	384	443	494	543	595
						Xt		0.616	0.619	0.620	0.620	0.620	0.621	0.627	0.647	0.670	0.695
14	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	498
						Kv		53	89	138	178	219	266	304	349	393	430
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	18	84	153	222	293	368	444	514	578	642	711
						Kv		73	132	192	253	318	384	444	500	556	615
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.65
16	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	498
						Kv		53	89	138	178	219	266	304	349	393	431
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	18	84	153	222	293	368	444	515	583	652	727
						Kv		73	133	192	253	318	384	445	504	564	629
						Xt		0.616	0.619	0.620	0.620	0.620	0.621	0.621	0.621	0.621	0.621

1. At 100% travel.
2. Clearance flow only

Whisper Trim - Level C3 - Flow Up																	Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Construction	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100
12	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479
						Kv		45	86	125	165	208	250	289	329	372	414
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	14	73	143	209	281	349	418	490	548	607	651
						Kv		63	124	181	243	302	362	424	474	525	563
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.620	0.639	0.662	0.680
14	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479
						Kv		45	86	125	165	208	250	289	329	372	414
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	14	73	143	209	282	349	418	490	553	619	679
						Kv		63	124	181	244	302	362	424	478	535	587
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.64
16	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479
						Kv		45	86	125	165	208	250	289	329	372	414
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62
			203	8	LNC	Cv	14	73	143	209	282	349	418	490	556	627	697
						Kv		63	124	181	243	302	361	424	481	542	603
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621

1. At 100% travel.
2. Clearance flow only



Large ED CL125 - CL600

Whisper Trim™ III - Level D3
and WhisperFlo Trim - Level X

Catalog 12
March 2012 - Page ED-14

Whisper Trim - Level D3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	445	496	549	594	0.89
						Kv		58	114	166	224	278	332	385	429	475	514	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.636	0.658	0.685	0.710	---
14	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	449	505	566	622	
						Kv		58	114	166	224	278	332	388	437	489	538	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.65	0.66	---
16	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	451	511	577	641	0.89
						Kv		58	114	166	224	278	332	390	442	499	554	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	---
30	610	24	505	19.88	LN	Cv	35	400	792	1183	1575	1968	2362	2756	3150	3545	3939	0.99
						Kv		346	685	1023	1362	1702	2043	2384	2725	3066	3407	---
						Xt		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.57	0.55	---
1. At 100% travel. 2. Clearance flow only																		

WhisperFlo Trim - Level X - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	62.2	92	180	274	366	454	538	616	689	757	820	
						Xt	0.53	0.71	0.7	0.69	0.68	0.68	0.69	0.69	0.7	0.71	0.73	---
			203	8	LNC	Cv	62.2	128	257	382	508	633	728	820	901	978	1019	0.89
						Xt	0.886	0.886	0.777	0.799	0.737	0.688	0.727	0.776	0.734	0.721	0.758	---
14	279.4	11	140	5.5	SNC	Cv	62.2	92	180	276	370	461	549	633	714	791	863	
						Xt	0.53	0.71	0.70	0.69	0.68	0.67	0.68	0.67	0.68	0.68	0.69	---
			203	8	LNC	Cv	62.2	126	258	386	517	642	762	866	961	1049	1113	
						Xt	0.69	0.69	0.66	0.69	0.66	0.65	0.66	0.71	0.70	0.70	0.73	---
16	279.4	11	140	5.5	SNC	Cv	62.2	92	180	277	372	465	556	645	730	813	892	
						Xt	0.53	0.71	0.7	0.69	0.68	0.67	0.67	0.66	0.66	0.66	0.66	---
			203	8	LNC	Cv	62.2	124	258	388	523	648	784	896	1001	1096	1175	
						Xt	0.556	0.556	0.58	0.614	0.612	0.629	0.615	0.665	0.678	0.691	0.719	---
1. At 100% travel. 2. Clearance flow only																		

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher, Whisper Trim, and WhisperFlo are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

March 2012 - Page ED-15

WhisperFlo™ Trim - Level Y and Level Z

WhisperFlo Trim - Level Y - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	35	55	109	168	225	282	338	392	445	496	546	0.89
						Xt	0.53	0.56	0.55	0.55	0.54	0.54	0.54	0.54	0.54	0.54	0.55	---
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900	0.89
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	---
14	279.4	11	140	5.5	SNC	Cv	35	55	109	168	226	284	340	396	452	505	558	
						Xt	0.53	0.56	0.56	0.55	0.54	0.54	0.54	0.53	0.53	0.53	0.54	---
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900	
						Xt	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	---
16	279.4	11	140	5.5	SNC	Cv	35	55	109	168	227	285	342	399	456	511	566	
						Xt	0.53	0.56	0.56	0.55	0.54	0.54	0.54	0.53	0.53	0.53	0.53	---
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900	
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only

WhisperFlo Trim - Level Z - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	21	42	80	119	160	202	242	282	322	361	399	
						Xt	0.53	0.44	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	0.89
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532
14	279.4	11	140	5.5	SNC	Cv	21	42	80	119	161	202	243	284	324	364	404	
						Xt	0.53	0.44	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.42
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	
						Xt	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
16	279.4	11	140	5.5	SNC	Cv	21	42	80	119	161	202	244	285	326	366	407	
						Xt	0.53	0.44	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.42
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Cavitrol III Trim - One Stage - Flow Down																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100
12	279.4	11	203	8	LNC	Cv	40	132	302	462	607	736	849	946	1030	1100	1160	0.91
						Kv	34.6	114	261	400	525	637	734	818	891	952	1003	---
14	279.4	11	203	8	LNC	Cv	40	132	303	467	620	759	886	996	1096	1184	1262	0.91
						Kv	34.6	114	262	404	536	657	766	862	948	1024	1092	---
16	279.4	11	203	8	LNC	Cv	40	132	304	471	628	775	910	1030	1140	1240	1330	0.91
						Kv	34.6	114	263	407	543	670	787	891	986	1073	1150	---
1. At 100% travel. 2. Clearance flow only																		

The Design EDR valve has flow coefficients identical to the 1 - 4 in. sizes of the Classes 125 - 600 Design ED valve. Please refer to those coefficients. For additional Design EDR body information, refer to Bulletin 51.1:ED.

Linear - Flow Down															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
8 & 10x8	177.8	7	76	3	C _V	105	212	332	458	578	689	788	878	954	1020	0.82
					K _V	90.8	183	287	396	500	596	682	759	825	882	---
					X _T	0.591	0.676	0.661	0.653	0.633	0.620	0.624	0.622	0.614	0.592	---
12 & 14x12	254.0	10	102	4	C _V	211	390	593	804	1010	1240	1460	1660	1830	1970	0.80
					K _V	183	337	513	695	874	1073	1263	1436	1583	1704	---
					X _T	0.443	0.652	0.669	0.664	0.671	0.653	0.662	0.669	0.658	0.629	---
Equal Percentage - Flow Down															Equal Percentage Characteristic	
8 & 10x8	177.8	7	76	3	C _V	32.5	59.6	85.3	114	159	229	334	468	619	755	0.85
					K _V	28.1	51.6	73.8	98.6	138	198	289	405	535	653	---
					X _T	0.969	0.939	0.842	0.944	0.840	0.731	0.641	0.633	0.639	0.639	---
12 & 14x12	254.0	10	102	4	C _V	81.3	143	207	286	382	557	752	1000	1290	1570	0.82
					K _V	70.3	124	179	247	330	482	650	865	1116	1358	---
					X _T	0.689	0.581	0.579	0.557	0.606	0.582	0.647	0.644	0.616	0.596	---
1. At 100% travel.																

1. At 100% travel.

Notes: The coefficients in this table are also appropriate for the EHT Valve.

Modified Equal Percentage - Flow Down															Modified Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
8 & 10x8	177.8	7	89	3.5	C _v	38.3	70.2	103	145	216	324	495	684	844	912	0.85
					K _v	33.1	60.7	89.1	125	187	280	428	592	730	789	---
					X _T	0.946	0.891	0.910	0.835	0.744	0.669	0.669	0.664	0.668	0.667	---
12 & 14x12	254.0	10	114	4.5	C _v	95.9	156	229	313	487	710	988	1280	1610	1830	0.83
					K _v	83.0	135	198	271	421	614	855	1107	1393	1583	---
					X _T	0.579	0.607	0.561	0.618	0.577	0.617	0.576	0.620	0.610	0.611	---

1. At 100% travel.

Notes: The coefficients in this table are also appropriate for the EHT Valve.



Linear - Flow Down																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2 & 3 x 2	38.1	1.5	29	1.125	C _v	1.44	3.39	9.44	15.2	20.5	25.0	29.0	32.3	34.9	36.1	0.93
					K _v	1.25	2.93	8.17	13.1	17.7	21.6	25.1	27.9	30.2	31.2	---
					X _T	0.718	0.612	0.566	0.605	0.648	0.697	0.727	0.740	0.740	0.735	---
3 & 4 x 3	58.7	2.3125	38	1.5	C _v	2.77	13.2	31.0	47.4	59.7	68.7	75.5	80.6	83.9	85.9	0.95
					K _v	2.40	11.4	26.8	41.0	51.6	59.4	65.3	69.7	72.6	74.3	---
					X _T	0.685	0.574	0.612	0.668	0.714	0.731	0.735	0.718	0.701	0.706	---
4 & 6 x 4	73.0	2.875	51	2	C _v	2.99	17.4	38.1	57.8	78.8	100	119	130	136	139	0.88
					K _v	2.59	15.1	33.0	50.0	68.2	86.5	103	112	118	120	---
					X _T	0.757	0.624	0.570	0.533	0.559	0.632	0.681	0.706	0.697	0.689	---
6 & 8 x 6	111.1	4.375	76	3	C _v	17.5	38.9	86.1	141	195	241	274	293	301	309	0.89
					K _v	15.1	33.6	74.5	122	169	208	237	253	260	267	---
					X _T	0.187	0.624	0.548	0.559	0.597	0.640	0.681	0.697	0.689	0.681	---
8 & 10x8	136.5	5.375	64	2.5	C _v	75.1	140	212	289	366	435	495	547	590	621	0.82
					K _v	65.0	121	183	250	317	376	428	473	510	537	---
					X _T	0.772	0.833	0.840	0.779	0.741	0.733	0.729	0.715	0.704	0.688	---
12 & 14x12	177.8	7	76	3	C _v	104	229	369	477	587	691	804	906	981	1030	0.81
					K _v	90.0	198	319	413	508	598	695	784	849	891	---
					X _T	0.406	0.476	0.478	0.523	0.543	0.561	0.552	0.547	0.558	0.584	---
Equal Percentage - Flow Down																Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2 & 3 x 2	38.1	1.5	22	0.875	C _v	1.25	1.36	2.47	4.14	6.33	9.48	13.8	18.7	23.1	27.0	0.93
					K _v	1.08	1.18	2.14	3.58	5.48	8.20	11.9	16.2	20.0	23.4	---
					X _T	0.766	0.761	0.608	0.589	0.601	0.601	0.593	0.605	0.660	0.735	---
3 & 4 x 3	58.7	2.3125	29	1.125	C _v	1.73	2.77	5.34	9.70	15.6	23.3	33.7	46.2	56.8	65.3	0.92
					K _v	1.50	2.40	4.62	8.39	13.5	20.2	29.2	40.0	49.1	56.5	---
					X _T	0.870	0.710	0.605	0.581	0.616	0.648	0.640	0.632	0.668	0.748	---
4 & 6 x 4	73.0	2.875	38	1.5	C _v	2.57	6.53	10.0	12.5	17.3	25.1	33.8	42.8	59.6	81.1	0.84
					K _v	2.22	5.65	8.65	10.8	15.0	21.7	29.2	37.0	51.6	70.2	---
					X _T	0.783	0.585	0.589	0.597	0.566	0.533	0.518	0.526	0.526	0.537	---
6 & 8 x 6	111.1	4.375	51	2	C _v	3.07	9.29	17.8	24.5	35.6	59.7	98.7	141	188	217	0.85
					K _v	2.66	8.04	15.4	21.2	30.8	51.6	85.4	122	163	188	---
					X _T	0.922	0.723	0.620	0.660	0.640	0.555	0.529	0.578	0.559	0.640	---
8 & 10x8	136.5	5.375	64	2.5	C _v	19.8	34.4	50.3	69.2	96.8	139	210	307	399	484	0.82
					K _v	17.1	29.8	43.5	59.9	83.7	120	182	266	345	419	---
					X _T	0.584	0.686	0.697	0.609	0.629	0.745	0.702	0.653	0.663	0.683	---
12 & 14x12	177.8	7	76	3	C _v	38.4	64.8	88.0	119	168	248	360	496	654	800	0.81
					K _v	33.2	56.1	76.1	103	145	215	311	429	566	692	---
					X _T	0.727	0.701	0.736	0.664	0.709	0.582	0.552	0.556	0.556	0.553	---
1. At 100% travel.																

Notes: The coefficients on this page are also appropriate for the EHT Valve.

Modified Equal Percentage - Flow Down															Modified Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2 & 3 x 2	38.1	1.5	29	1.125	C _v	1.24	1.82	3.91	6.86	11.1	16.9	23.3	28.1	30.4	33.2	0.94
					K _v	1.07	1.57	3.38	5.93	9.60	14.6	20.2	24.3	26.3	28.7	---
					X _T	0.792	0.681	0.578	0.581	0.605	0.628	0.652	0.693	0.731	0.710	---
3 & 4 x 3	58.7	2.3125	38	1.5	C _v	1.94	4.28	9.66	18.1	29.9	45.4	60.5	68.9	74.7	80.9	0.96
					K _v	1.68	3.70	8.36	15.7	25.9	39.3	52.3	59.6	64.6	70.0	---
					X _T	0.805	0.640	0.593	0.624	0.668	0.672	0.677	0.753	0.779	0.710	---
4 & 6 x 4	73.0	2.875	51	2	C _v	2.99	9.01	12.7	19.6	30.3	44.5	65.8	96.3	114	126	0.90
					K _v	2.59	7.79	11.0	17.0	26.2	38.5	56.9	83.3	98.6	109	---
					X _T	0.681	0.578	0.593	0.559	0.526	0.518	0.544	0.597	0.693	0.693	---
6 & 8 x 6	111.1	4.375	76	3	C _v	5.82	16.2	30.6	59.8	115	185	234	254	278	293	0.88
					K _v	5.03	14.0	26.5	51.7	99.5	160	202	220	240	253	---
					X _T	0.806	0.677	0.624	0.574	0.559	0.597	0.664	0.723	0.706	0.689	---
8 & 10x8	136.5	5.375	76	3	C _v	22.9	41.9	61.9	86.4	140	225	334	451	537	584	0.85
					K _v	19.8	36.2	53.5	74.7	121	195	289	390	465	505	---
					X _T	0.563	0.698	0.726	0.739	0.734	0.691	0.666	0.682	0.734	0.740	---
12 & 14x12	177.8	7	89	3.5	C _v	42.4	73.7	104	147	223	351	523	717	899	1010	0.80
					K _v	36.7	63.8	90.0	127	193	304	452	620	778	874	---
					X _T	0.691	0.679	0.652	0.650	0.598	0.549	0.549	0.552	0.551	0.551	---

1. At 100% travel.

Notes: The coefficients on this page are also appropriate for the EHT Valve.



Linear - Flow Up															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2 & 3 x 2	38.1	1.5	29	1.125	C _v	1.40	2.77	8.42	14.3	19.3	23.9	28.0	31.4	33.4	35.2	0.90
					K _v	1.21	2.40	7.28	12.4	16.7	20.7	24.2	27.2	28.9	30.4	---
					X _T	0.718	0.815	0.624	0.628	0.685	0.706	0.701	0.685	0.677	0.656	---
3 & 4 x 3	58.7	2.3125	38	1.5	C _v	2.98	11.7	28.3	45.7	58.8	67.9	75.3	82.0	86.4	88.6	0.94
					K _v	2.58	10.1	24.5	39.5	50.9	58.7	65.1	70.9	74.7	76.6	---
					X _T	0.706	0.664	0.697	0.710	0.731	0.731	0.727	0.710	0.689	0.681	---
4 & 6 x 4	73.0	2.875	51	2	C _v	2.92	15.1	30.6	48.6	68.0	86.8	103	116	123	125	0.92
					K _v	2.53	13.1	26.5	42.0	58.8	75.1	89.1	100	106	108	---
					X _T	0.748	0.819	0.792	0.636	0.624	0.697	0.779	0.797	0.788	0.797	---
6 & 8 x 6	111.1	4.375	76	3	C _v	9.11	37.3	78.2	128	180	224	254	269	278	282	0.89
					K _v	7.88	32.3	67.6	111	156	194	220	233	240	244	---
					X _T	0.620	0.656	0.589	0.574	0.601	0.648	0.689	0.718	0.714	0.714	---
Equal Percentage - Flow Up															Equal Percentage Characteristic	
2 & 3 x 2	38.1	1.5	22	0.875	C _v	1.06	1.31	2.10	3.73	6.26	9.46	13.1	17.3	22.1	26.3	0.91
					K _v	0.917	1.13	1.82	3.23	5.41	8.18	11.3	15.0	19.1	22.7	---
					X _T	0.970	0.757	0.731	0.689	0.652	0.624	0.624	0.648	0.693	0.723	---
3 & 4 x 3	58.7	2.3125	29	1.125	C _v	1.94	2.86	5.09	9.02	14.9	22.6	32.1	43.0	53.9	64.7	0.94
					K _v	1.68	2.47	4.40	7.80	12.9	19.5	27.8	37.2	46.6	56.0	---
					X _T	0.810	0.757	0.681	0.677	0.706	0.706	0.668	0.652	0.723	0.761	---
4 & 6 x 4	73.0	2.875	38	1.5	C _v	2.35	6.15	9.08	11.3	15.4	22.0	30.3	40.0	53.9	69.6	0.80
					K _v	2.03	5.32	7.85	9.77	13.3	19.0	26.2	34.6	46.6	60.2	---
					X _T	0.856	0.681	0.620	0.656	0.644	0.597	0.555	0.555	0.578	0.632	---
6 & 8 x 6	111.1	4.375	51	2	C _v	4.10	9.98	17.9	24.7	35.3	57.3	93.0	133	174	210	0.79
					K _v	3.55	8.63	15.5	21.4	30.5	49.6	80.4	115	151	182	---
					X _T	0.697	0.677	0.605	0.578	0.597	0.608	0.574	0.555	0.616	0.605	---
Modified Equal Percentage - Flow Up															Modified Equal Percentage Characteristic	
2 & 3 x 2	38.1	1.5	29	1.125	C _v	1.10	1.71	3.37	6.56	11.2	16.5	21.6	26.4	30.8	33.1	0.91
					K _v	0.952	1.48	2.92	5.67	9.69	14.3	18.7	22.8	26.6	28.6	---
					X _T	0.898	0.748	0.689	0.640	0.636	0.656	0.693	0.723	0.727	0.677	---
3 & 4 x 3	58.7	2.3125	38	1.5	C _v	2.11	4.16	8.97	16.9	28.4	42.5	55.8	68.2	78.5	84.0	0.
					K _v	1.83	3.60	7.76	14.6	24.6	36.8	48.3	59.0	67.9	72.7	---
					X _T	0.828	0.710	0.672	0.731	0.723	0.689	0.731	0.766	0.723	0.706	---
4 & 6 x 4	73.0	2.875	51	2	C _v	2.75	8.60	11.8	16.6	26.8	42.3	59.8	78.9	106	116	0.88
					K _v	2.38	7.44	10.2	14.4	23.2	36.6	51.7	68.2	91.7	100.3	---
					X _T	---	0.608	0.636	0.640	0.570	0.537	0.578	0.664	0.693	0.779	---
6 & 8 x 6	111.1	4.375	76	3	C _v	6.81	16.5	30.5	58.0	109	175	228	256	275	281	0.88
					K _v	5.89	14.3	26.4	50.2	94.3	151	197	221	238	243	---
					X _T	0.677	0.632	0.593	0.570	0.574	0.601	0.624	0.644	0.693	0.697	---
1. At 100% travel.																

1. At 100% travel.

Catalog 12

January 2009 - Page EH-5

Micro-Form Valve Plug
Flow Up through the Port

Micro-Form - Flow Up														Equal Percentage Characteristic		
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1, 1-1/2 x 1, & 2 x 1	6.4	0.25	19	0.75	C _V	0.072	0.106	0.163	0.232	0.324	0.449	0.626	0.871	1.22	1.58	0.91
					K _V	0.062	0.092	0.141	0.201	0.280	0.388	0.541	0.753	1.06	1.37	---
					X _T	0.778	0.717	0.421	0.474	0.513	0.540	0.558	0.566	0.569	0.644	---
	12.7	0.5	19	0.75	C _V	0.220	0.360	0.532	0.746	1.04	1.50	2.15	3.06	4.15	5.37	0.92
					K _V	0.190	0.311	0.460	0.645	0.900	1.30	1.86	2.65	3.59	4.65	---
					X _T	0.893	0.803	0.748	0.636	0.633	0.637	0.644	0.642	0.661	0.718	---
			22 ⁽²⁾	0.875 ⁽²⁾	C _V	0.254	0.445	0.636	0.890	1.40	2.23	3.50	4.77	5.72	6.36	0.93
					K _V	0.220	0.385	0.550	0.770	1.21	1.93	3.03	4.13	4.95	5.50	---
					X _T	0.632	0.627	0.630	0.632	0.629	0.628	0.629	0.626	0.633	0.630	---
	19.1	0.75	19	0.75	C _V	0.441	0.681	1.04	1.59	2.36	3.43	4.81	6.43	7.84	8.91	0.88
					K _V	0.381	0.589	0.900	1.38	2.04	2.97	4.16	5.56	6.78	7.71	---
					X _T	0.782	0.725	0.652	0.548	0.519	0.506	0.514	0.641	0.651	0.648	---
			22 ⁽²⁾	0.875 ⁽²⁾	C _V	0.550	0.721	1.24	1.85	2.78	4.43	6.70	8.45	9.27	10.3	0.84
					K _V	0.476	0.624	1.07	1.60	2.40	3.83	5.80	7.31	8.02	8.91	---
					X _T	0.516	0.693	0.581	0.587	0.586	0.589	0.585	0.583	0.587	0.585	---
2 & 3 x 2	25.4	22	0.875	C _V	0.653	1.19	1.89	2.89	4.50	7.08	10.9	15.9	20.0	21.5	0.95	
				K _V	0.565	1.03	1.63	2.50	3.89	6.12	9.43	13.8	17.3	18.6	---	
				X _T	0.809	0.812	0.814	0.809	0.810	0.811	0.817	0.806	0.810	0.810	---	
		29 ⁽²⁾	1.125 ⁽²⁾	C _V	0.884	1.67	2.86	4.96	9.08	15.6	20.9	23.0	23.9	24.2	0.92	
				K _V	0.765	1.44	2.47	4.29	7.85	13.5	18.1	19.9	20.7	20.9	---	
				X _T	0.696	0.700	0.698	0.700	0.696	0.700	0.697	0.745	0.714	0.700	--	
1. At 100% travel. 2. Travels identified with this superscript are modified equal percentage characteristic. All other travels are equal percentage.																

1. At 100% travel.

2. Travels identified with this superscript are modified equal percentage characteristic. All other travels are equal percentage.



EHS and EHT⁽¹⁾ CL2500

Cavitrol III™ Cage
Flow Down through the Port

Catalog 12
January 2011 - Page EH-6

EHS and EHT, Cavitrol - Flow Down																	Linear Characteristic	
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Min. Throttling $C_v^{(2)}$	Valve Opening—Percent of Total Travel										$F_L^{(3)}$
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
Two Stage	1, 1-1/2 x 1, & 2 x 1 ⁽¹⁾	15.9	0.625	32	1.25	C_v	0.210	0.170	0.480	1.00	1.60	2.20	2.70	3.20	3.70	4.10	4.30	0.98
						K_v	0.182	0.147	0.415	0.865	1.38	1.90	2.34	2.77	3.20	3.55	3.72	---
	2 & 3 x 2	31.8	1.25	51	2	C_v	0.410	0.460	1.60	2.90	4.10	5.30	6.50	7.70	8.80	9.70	10.1	0.98
						K_v	0.355	0.398	1.38	2.51	3.55	4.58	5.62	6.66	7.61	8.39	8.74	---
	3 & 4 x 3	47.6	1.875	64	2.5	C_v	0.610	0.990	3.80	6.60	9.40	12.1	14.9	17.6	20.1	22.7	24.1	0.98
						K_v	0.528	0.856	3.29	5.71	8.13	10.5	12.9	15.2	17.4	19.6	20.8	---
	4 & 6 x 4	73.0	2.875	70	2.75	C_v	0.910	2.10	7.10	12.2	17.2	22.3	27.2	32.2	37.3	42.1	43.9	0.98
						K_v	0.787	1.82	6.14	10.6	14.9	19.3	23.5	27.9	32.3	36.4	38.0	---
	6 & 8 x 6	111.1	4.375	95	3.75	C_v	1.50	4.60	12.8	20.8	29.0	37.0	44.9	52.9	60.9	69.3	75.8	0.98
						K_v	1.30	3.98	11.1	18.0	25.1	32.0	38.8	45.8	52.7	59.9	65.6	---
Three Stage	1, 1-1/2 x 1, & 2 x 1	---	---	---	---	C_v	---	---	---	---	---	---	---	---	---	---	---	---
						K_v	---	---	---	---	---	---	---	---	---	---	---	---
	2 & 3 x 2	15.9	0.625	51	2	C_v	0.420	0.280	0.740	1.20	1.60	2.00	2.50	2.90	3.30	3.60	3.70	0.99
						K_v	0.363	0.242	0.640	1.04	1.38	1.73	2.16	2.51	2.85	3.11	3.20	--
	3 & 4 x 3	33.3	1.3125	64	2.5	C_v	0.730	1.44	2.67	4.06	5.37	6.67	7.93	9.26	10.5	11.8	13.1	0.99
						K_v	0.631	1.25	2.31	3.51	4.65	5.77	6.86	8.01	9.08	10.2	11.3	---
	4 & 6 x 4	58.7	2.3125	70	2.75	C_v	1.00	1.00	3.90	6.50	8.90	11.7	14.4	16.9	19.0	20.3	20.8	0.99
						K_v	0.865	0.865	3.37	5.62	7.70	10.1	12.5	14.6	16.4	17.6	18.0	---
	6 & 8 x 6	111.1	4.375	95	3.75	C_v	2.80	4.4	11.2	16.3	21.5	28.3	35	38.5	45.2	51.9	55.2	0.99
						K_v	2.42	3.8	9.7	14.1	18.6	24.5	30.3	33.3	39.1	44.9	47.7	---
1. Cavitrol III trim in the CL2500, NPS 1, two-stage and in the CL2500, NPS 2, three-stage valve body sizes uses unbalanced valve plugs. These sizes and constructions are Fisher® EHS valves; all other valves in this table are EHT valves.																		
2. Valves should not be required to throttle at a C_v less than the specified minimum of C_v for an extended period. Erosion damage to the valve seats might result.																		
3. At 100 percent travel.																		

EHT, CL2500, Cavitrol III, Protected Inside Seat Design, Flow Down																	Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling C_v	Valve Opening – Percent of Total Travel									
		mm	Inch	mm	Inch			10	20	30	40	50	60	70	80	90	100
Two Stage	3, 4 X 3	32.6	1.284	64	2.5	C_v	0.61	0.3	3.1	5.7	8.3	10.7	12.9	14.9	16.6	18.2	19.5
						K_v	0.528	0.26	2.7	4.9	7.2	9.3	11.2	12.1	14.4	15.7	16.8
	4, 6 X 4	58	2.284	70	2.75	C_v	0.91	1.1	6.2	11.2	16.1	20.9	25.5	30	34.2	38.3	41.1
						K_v	0.787	0.95	5.4	9.7	13.9	18.1	22.1	25.9	29.6	33.1	35.6
	6, 8 X 6	96.1	3.784	95	3.75	C_v	1.5	4.3	13.8	23	31.7	39.6	46.9	53.3	59	64	68.1
						K_v	1.3	3.7	11.9	19.9	27.4	34.3	40.6	46.1	51	55.4	58.9
Three Stage	3, 4 X 3	18.3	0.722	64	2.5	C_v	0.73	1	2.1	3	3.9	5.3	5.9	6.3	6.8	7.4	7.4
						K_v	0.631	0.865	1.8	2.6	3.4	4.6	5.1	5.4	5.9	6.4	6.4
	4, 6 X 4	43.7	1.722	70	2.75	C_v	1.0	2.0	4.0	5.8	7.7	11	12.8	14.5	16.3	18.2	19.2
						K_v	0.865	0.78	1.72	5	6.6	9.5	11.1	12.5	14.1	15.7	16.6
	6, 8 X 6	96.1	3.784	95	3.75	C_v	2.8	4.3	11.1	16.2	21.4	28.2	34.8	38.3	44.9	51.7	54.7
						K_v	2.42	3.7	9.6	14	18.5	24.4	30.1	33.1	38.8	44.7	47.3

Notes:

1. All other EHT flow coefficients are identical to EHD coefficients. Refer to EHD information using all flange ratings and cage styles. In applications where pressure drop decreases with travel, consider using characterized Cavitrol III cages. Contact your Emerson Process Management sales office for assistance.

Fisher and Cavitrol are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 1988, 2011; All Rights Reserved



EHS, CL3273 Cavitrol III 3–Stage Micro–Flat - Flow Down																Linear Characteristic	
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min	10	20	30	40	50	60	70	80	90	100	
2 ⁽³⁾	25.4	1	38.1	1.5	C _v	0.05	0.01	0.06	0.09	0.16	0.34	0.46	0.62	0.89	1.06	1.18	0.97
					K _v	0.04	0.01	0.05	0.08	0.14	0.29	0.40	0.54	0.77	0.92	1.02	
2 ⁽⁴⁾	25.4	1	63.5	2.5	C _v	0.06	0.01	0.14	0.37	0.72	1.20	1.86	2.75	3.74	4.53	5.54	0.97
					K _v	0.05	0.01	0.12	0.32	0.62	1.04	1.61	2.38	3.24	3.92	4.79	
1. At 100% travel 2. Cavitrol III Micro–Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 3. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 5.065 cm2 / 0.785 ln2, 3/4" stem 4. Flowing port: 19.1 mm / 0.75 Inch, Unbalanced Area: 5.065 cm2 / 0.785 ln2, 3/4" stem																	



This page is intentionally left blank.

Catalog 12

March 2012 - Page ES-1

Quick Opening Cage

Quick Opening - Flow Up																Quick Opening Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽³⁾
	mm	Inches	mm ⁽¹⁾	Inches ⁽¹⁾		Coeffs. for 6 mm (0.25 in.) Travel ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
1/2	33.3	1.3125	19	0.75	C _V	6.27	4.00	5.63	6.22	6.35	6.44	6.48	6.52	6.53	6.53	6.53	0.88
					K _V	5.42	3.46	4.87	5.38	5.49	5.57	5.61	5.64	5.65	5.65	5.65	---
					X _T	0.665	0.681	0.711	0.653	0.651	0.640	0.632	0.624	0.622	0.622	0.622	---
3/4	33.3	1.3125	19	0.75	C _V	12.3	4.94	8.80	11.8	13.1	13.8	14.1	14.2	14.2	14.2	14.2	0.83
					K _V	10.6	4.27	7.61	10.2	11.3	11.9	12.2	12.3	12.3	12.3	12.3	---
					X _T	0.593	0.576	0.688	0.605	0.571	0.552	0.539	0.534	0.534	0.534	0.534	---
1 & 1-1/4	33.3	1.3125	19	0.75	C _V	16.3	5.24	10.0	15.0	18.4	20.3	21.0	21.1	21.3	21.4	21.4	0.89
					K _V	14.1	4.53	8.65	13.0	15.9	17.6	18.2	18.3	18.4	18.5	18.5	---
					X _T	0.661	0.540	0.664	0.656	0.660	0.641	0.650	0.663	0.654	0.648	0.650	---
1-1/2	47.6	1.875	19	0.75	C _V	24.4	7.60	15.1	22.3	28.2	33.4	37.0	38.0	38.0	38.0	38.0	0.94
					K _V	21.1	6.57	13.1	19.3	24.4	28.9	32.0	32.9	32.9	32.9	32.9	---
					X _T	0.645	0.577	0.613	0.639	0.684	0.703	0.713	0.743	0.777	0.789	0.789	---
	33.3	1.3125	19	0.75	C _V	18.0	4.83	10.4	16.2	21.4	25.6	28.2	29.8	30.2	30.3	30.4	0.94
					K _V	15.6	4.18	9.00	14.0	18.5	22.1	24.4	25.8	26.1	26.2	26.3	---
					X _T	0.605	0.611	0.607	0.588	0.598	0.610	0.651	0.666	0.699	0.708	0.717	---
2	58.7	2.3125	29	1.125	C _V	35.3	14.3	31.1	48.6	59.3	65.2	67.2	67.2	67.2	67.2	67.2	0.93
					K _V	30.5	12.4	26.9	42.0	51.3	56.4	58.1	58.1	58.1	58.1	58.1	---
					X _T	0.607	0.633	0.627	0.619	0.732	0.758	0.771	0.797	0.810	0.810	0.810	---
	33.3	1.3125	19	0.75	C _V	18.6	5.12	10.5	16.7	22.2	26.9	30.9	33.9	36.3	38.1	39.4	0.91
					K _V	16.1	4.43	9.08	14.4	19.2	23.3	26.7	29.3	31.4	33.0	34.1	---
					X _T	0.560	0.588	0.617	0.565	0.571	0.640	0.722	0.796	0.826	0.785	0.734	---
2-1/2	73.0	2.875	38	1.5	C _V	35.3	21.8	42.0	66.6	83.8	91.1	93.1	93.1	93.1	93.1	93.1	0.91
					K _V	30.5	18.9	36.3	57.6	72.5	78.8	80.5	80.5	80.5	80.5	80.5	---
					X _T	0.675	0.659	0.684	0.720	0.790	0.795	0.827	0.848	0.868	0.868	0.868	---
	47.6	1.875	19	0.75	C _V	26.1	7.40	15.5	23.3	31.4	39.8	48.4	56.1	61.7	62.3	69.2	0.95
					K _V	22.6	6.40	13.4	20.2	27.2	34.4	41.9	48.5	53.4	53.9	59.9	---
					X _T	0.609	0.636	0.599	0.612	0.619	0.692	0.747	0.824	0.859	0.842	---	---
3	87.3	3.4375	38	1.5	C _V	37.4	23.3	45.5	78.3	106	120	130	136	143	146	150	0.87
					K _V	32.4	20.2	39.4	67.7	91.7	104	112	118	124	126	130	---
					X _T	0.590	0.585	0.592	0.602	0.685	0.740	0.726	0.737	0.731	0.733	0.720	---
	58.7	2.3125	29	1.125	C _V	36.3	14.7	32.4	51.2	68.8	83.1	94.3	103	108	112	115	0.91
					K _V	31.4	12.7	28.0	44.3	59.5	71.9	81.6	89.1	93.4	96.9	99.5	---
					X _T	0.564	0.609	0.565	0.565	0.593	0.679	0.729	0.751	0.774	0.785	0.752	---

1. When using Fisher 655-EC as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch).

2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.

3. At 100% travel.

Restricted trim.



Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽³⁾
	mm	Inches	mm ⁽¹⁾	Inches ⁽¹⁾		Coeffs. for 6 mm (0.25 in.) Travel ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
4	111.1	4.375	51	2	C _V	46.3	39.0	77.3	132	174	198	215	225	230	234	235	0.89
					K _V	40.0	33.7	66.9	114	151	171	186	195	199	202	203	---
					X _T	0.647	0.642	0.691	0.714	0.763	0.768	0.763	0.769	0.775	0.783	0.780	---
	73.0	2.875	38	1.5	C _V	41.2	26.9	47.2	76.4	108	135	156	169	178	181	183	0.88
					K _V	35.6	23.3	40.8	66.1	93.4	117	135	146	154	157	158	---
					X _T	0.613	0.524	0.683	0.669	0.664	0.688	0.741	0.783	0.763	0.752	0.736	---
6	177.8	7	51	2	C _V	102	89.9	162	255	322	365	395	418	436	455	469	0.82
					K _V	88.2	77.8	140	221	279	316	342	362	377	394	406	---
					X _T	0.642	0.572	0.612	0.601	0.652	0.664	0.677	0.681	0.701	0.698	0.700	---
	111.1	4.375	51	2	C _V	66.1	49.8	108	164	217	255	274	282	290	291	302	0.90
					K _V	57.2	43.1	93.4	142	188	221	237	244	251	252	261	---
					X _T	0.667	0.711	0.630	0.619	0.650	0.724	0.814	0.883	0.883	0.909	0.860	---
8	203.2	8	51	2	C _V	122	94.4	205	323	441	539	622	677	720	759	787	0.85
					K _V	106	81.7	177	279	381	466	538	586	623	657	681	---
					X _T	0.616	0.683	0.607	0.575	0.603	0.682	0.726	0.772	0.809	0.814	0.814	---
8	203.2	8	76	3	C _V	122	156	337	490	612	700	759	796	827	844	875	0.85
					K _V	106	135	292	424	529	606	657	689	715	730	757	---
					X _T	0.616	0.520	0.561	0.654	0.757	0.804	0.814	0.818	0.801	0.810	0.774	---

1. When using Fisher 655-EC as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch).
 2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.
 3. At 100% travel.
 Restricted trim.

Catalog 12

March 2012 - Page ES-3

Linear Cage

Linear - Flow Up																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L (1)
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	2.27	4.12	6.23	8.54	11.0	13.4	15.8	17.8	19.3	20.1	0.89
					K _v	1.96	3.56	5.39	7.39	9.52	11.6	13.7	15.4	16.7	17.4	---
					X _T	0.691	0.691	0.690	0.696	0.696	0.708	0.709	0.705	0.702	0.690	---
1-1/2	47.6	1.875	19	0.75	C _v	3.56	7.01	11.1	15.1	19.0	22.9	26.7	30.0	33.1	34.9	0.92
					K _v	3.08	6.06	9.60	13.1	16.4	19.8	23.1	25.9	28.6	30.2	---
					X _T	0.628	0.582	0.604	0.647	0.683	0.699	0.715	0.737	0.741	0.764	---
	33.3	1.3125	19	0.75	C _v	2.42	4.30	6.40	8.77	11.5	14.6	17.8	21.1	24.3	26.9	0.95
					K _v	2.09	3.72	5.54	7.59	9.95	12.6	15.4	18.3	21.0	23.3	---
					X _T	0.648	0.682	0.712	0.693	0.664	0.678	0.701	0.732	0.756	0.799	---
2	58.7	2.3125	29	1.125	C _v	8.49	17.1	25.9	35.3	44.4	52.9	59.2	62.0	63.9	65.3	0.91
					K _v	7.34	14.8	22.4	30.5	38.4	45.8	51.2	53.6	55.3	56.5	---
					X _T	0.618	0.635	0.689	0.710	0.723	0.732	0.742	0.759	0.761	0.762	---
	33.3	1.3125	19	0.75	C _v	2.22	4.11	6.06	8.25	11.0	14.3	18.0	21.8	26.0	30.9	0.91
					K _v	1.92	3.56	5.24	7.14	9.52	12.4	15.6	18.9	22.5	26.7	---
					X _T	0.725	0.694	0.729	0.746	0.688	0.675	0.667	0.686	0.711	0.722	---
2-1/2	73.0	2.875	38	1.5	C _v	10.4	22.2	34.9	47.1	58.2	66.6	73.7	79.3	84.4	86.5	0.93
					K _v	9.00	19.2	30.2	40.7	50.3	57.6	63.8	68.6	73.0	74.8	---
					X _T	0.672	0.727	0.739	0.776	0.783	0.832	0.858	0.877	0.854	0.866	---
	47.6	1.875	19	0.75	C _v	3.50	6.85	10.8	14.8	18.9	23.3	28.2	34.1	41.1	48.6	0.93
					K _v	3.03	5.93	9.34	12.8	16.3	20.2	24.4	29.5	35.6	42.0	---
					X _T	0.617	0.627	0.679	0.716	0.740	0.752	0.783	0.774	0.778	0.783	---
3	87.3	3.4375	38	1.5	C _v	15.3	34.3	52.8	71.4	87.8	101	112	121	129	135	0.89
					K _v	13.2	29.7	45.7	61.8	75.9	87.4	96.9	105	112	117	---
					X _T	0.607	0.631	0.663	0.694	0.720	0.742	0.762	0.786	0.771	0.751	---
	58.7	2.3125	29	1.125	C _v	6.39	13.0	20.7	29.1	38.2	47.9	58.0	68.4	79.3	88.8	0.91
					K _v	5.53	11.2	17.9	25.2	33.0	41.4	50.2	59.2	68.6	76.8	---
					X _T	0.662	0.677	0.704	0.677	0.648	0.646	0.643	0.658	0.714	0.742	---
1. At 100% travel. 2. If coefficients listed above for the NPS 8 linear cage with 51 mm (2 inch) travel are not sufficient for your application, consider using the quick opening cage. The NPS 8 quick opening cage with 51 mm (2 inch) travel has approximately a linear characteristic. Restricted trim.																




Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
4	111.1	4.375	51	2	C _v	23.7	46.4	72.9	98.2	122	145	165	183	199	212	0.89
					K _v	20.5	40.1	63.1	84.9	106	125	143	158	172	183	---
					X _T	0.553	0.619	0.644	0.680	0.713	0.737	0.743	0.823	0.816	0.791	---
	73.0	2.875	38	1.5	C _v	10.6	22.5	35.0	47.5	60.2	73.1	88.0	103	120	139	0.93
					K _v	9.17	19.5	30.3	41.1	52.1	63.2	76.1	89.1	104	120	---
					X _T	0.613	0.671	0.698	0.718	0.718	0.731	0.722	0.751	0.769	0.780	---
6	177.8	7	51	2	C _v	55.0	118	180	235	280	312	341	368	390	417	0.81
					K _v	47.6	102	156	203	242	270	295	318	337	361	---
					X _T	0.597	0.683	0.701	0.687	0.767	0.791	0.787	0.792	0.794	0.745	---
6	111.1	4.375	51	2	C _v	15.7	35.8	60.2	86.2	115	146	179	215	247	271	0.89
					K _v	13.6	31.0	52.1	74.6	99.5	126	180	186	214	234	---
					X _T	0.678	0.668	0.676	0.683	0.668	0.645	0.668	0.695	0.759	0.817	---
8 ⁽²⁾	203.2	8	51	2	C _v	66.6	147	221	292	375	450	522	592	652	701	0.84
					K _v	57.6	127	191	253	324	389	452	512	564	606	---
					X _T	0.758	0.588	0.597	0.637	0.640	0.676	0.702	0.720	0.738	0.757	---
8	203.2	8	76	3	C _v	100	213	330	451	553	648	719	773	809	836	0.85
					K _v	86.5	184	285	390	478	561	622	669	700	723	---
					X _T	0.616	0.624	0.669	0.691	0.738	0.747	0.762	0.780	0.787	0.799	---
1. At 100% travel. 2. If coefficients listed above for the NPS 8 linear cage with 51 mm (2 inch) travel are not sufficient for your application, consider using the quick opening cage. The NPS 8 quick opening cage with 51 mm (2 inch) travel has approximately a linear characteristic. Restricted trim.																

Catalog 12

March 2012 - Page ES-5

Equal Percentage Cage


Equal Percentage - Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	0.783	1.29	1.86	2.71	4.18	6.44	9.54	13.1	15.7	17.4	0.95
					K _v	0.677	1.12	1.61	2.34	3.62	5.57	8.25	11.3	13.6	15.1	---
					X _T	0.754	0.794	0.763	0.670	0.652	0.621	0.630	0.677	0.718	0.721	---
1-1/2	47.6	1.875	19	0.75	C _v	1.54	2.52	3.57	4.94	7.41	11.6	17.2	23.5	28.7	33.4	0.94
					K _v	1.33	2.18	3.09	4.27	6.41	10.0	14.9	20.3	24.8	28.9	---
					X _T	0.674	0.670	0.694	0.731	0.706	0.681	0.698	0.692	0.789	0.793	---
	33.3	1.3125	19	0.75	C _v	0.882	1.35	1.89	2.52	3.68	5.52	8.13	12.0	16.6	21.0	0.96
					K _v	0.763	1.17	1.63	2.18	3.18	4.77	7.03	10.4	14.4	18.2	---
					X _T	0.858	0.845	0.867	0.810	0.833	0.755	0.776	0.766	0.766	0.766	---
2	58.7	2.3125	29	1.125	C _v	1.74	3.15	4.72	6.91	10.6	16.3	25.0	36.7	47.8	56.2	0.92
					K _v	1.51	2.72	4.08	5.98	9.17	14.1	21.6	31.7	41.3	48.6	---
					X _T	0.863	0.848	0.849	0.805	0.782	0.778	0.792	0.772	0.847	0.848	---
	33.3	1.3125	19	0.75	C _v	0.849	1.34	1.83	2.39	3.43	5.12	7.49	11.2	15.8	20.8	0.91
					K _v	0.734	1.16	1.58	2.07	2.97	4.43	6.48	9.69	13.7	18.0	---
					X _T	0.844	0.778	0.803	0.767	0.791	0.764	0.764	0.764	0.755	0.728	---
2-1/2	73.0	2.875	38	1.5	C _v	4.05	7.19	10.6	14.5	21.2	31.6	45.5	64.2	77.7	82.7	0.93
					K _v	3.50	6.22	9.17	12.5	18.3	27.3	39.4	55.5	67.2	71.5	---
					X _T	0.747	0.768	0.745	0.779	0.764	0.744	0.783	0.802	0.841	0.878	---
	47.6	1.875	19	0.75	C _v	1.43	2.37	3.34	4.76	7.25	11.3	17.3	24.2	31.8	40.3	0.95
					K _v	1.24	2.05	2.89	4.12	6.27	9.77	15.0	20.9	27.5	34.9	---
					X _T	0.664	0.721	0.741	0.765	0.679	0.681	0.678	0.681	0.748	0.744	---
3	87.3	3.4375	38	1.5	C _v	4.05	6.84	10.0	15.0	23.8	37.8	59.0	87.1	110	121	0.89
					K _v	3.50	5.92	8.65	13.0	20.6	32.7	51.0	75.3	95.2	105	---
					X _T	0.768	0.757	0.761	0.757	0.758	0.571	0.754	0.756	0.758	0.757	---
	58.7	2.3125	29	1.125	C _v	2.74	3.44	4.86	6.95	10.6	16.5	25.0	37.7	52.7	67.5	0.94
					K _v	2.37	2.98	4.20	6.01	9.17	14.3	21.6	32.6	45.6	58.4	---
					X _T	0.753	0.748	0.756	0.783	0.786	0.741	0.736	0.732	0.737	0.738	---
4	111.1	4.375	51	2	C _v	6.56	11.4	17.3	27.0	42.2	66.4	103	146	184	203	0.91
					K _v	5.67	9.86	15.0	23.4	36.5	57.4	89.1	126	159	176	---
					X _T	0.722	0.717	0.739	0.772	0.738	0.718	0.718	0.736	0.792	0.822	---
	73.0	2.875	38	1.5	C _v	3.96	7.14	10.6	14.5	21.1	31.7	48.0	69.7	95.6	121	0.94
					K _v	3.43	6.18	9.17	12.5	18.3	27.4	41.5	60.3	82.7	105	---
					X _T	0.792	0.803	0.770	0.767	0.760	0.725	0.703	0.717	0.763	0.764	---

1. At 100% travel.
 Restricted trim.



Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
6	177.8	7	51	2	C _v	13.2	24.6	41.1	62.5	97.1	155	223	286	326	357	0.86
					K _v	11.4	21.3	35.6	54.1	84.0	134	193	247	282	309	---
					X _T	0.723	0.737	0.767	0.846	0.803	0.781	0.808	0.826	0.847	0.816	---
	111.1	4.375	51	2	C _v	4.96	9.02	14.0	24.2	39.4	60.8	94.6	144	199	233	0.91
					K _v	4.29	7.80	12.1	20.9	34.1	52.6	81.8	125	172	202	---
					X _T	0.842	0.792	0.778	0.709	0.723	0.739	0.729	0.706	0.719	0.806	---
8	203.2	8	51	2	C _v	18.8	33.6	53.6	79.8	114	168	242	345	467	570	0.85
					K _v	16.3	29.1	46.4	69.0	98.6	145	209	298	404	493	---
					X _T	0.874	0.865	0.769	0.748	0.731	0.697	0.712	0.707	0.697	0.694	---
8	203.2	8	76	3	C _v	25.9	53.3	97.8	178	299	461	618	727	768	808	0.85
					K _v	22.4	46.1	84.6	154	259	399	535	629	664	699	---
					X _T	0.825	0.728	0.681	0.616	0.678	0.716	0.735	0.793	0.825	0.827	---
1. At 100% travel. Restricted trim.																

Whisper Trim I															Linear Characteristic
Valve Size, ⁽¹⁾ NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel									
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100
1 & 1-1/4	33.3	1.3125	19	0.75	C _v	3.16	6.97	11.8	15.1	16.5	17.2	17.3	17.4	17.4	18.4
					K _v	2.73	6.03	10.2	13.1	14.3	14.9	15.0	15.1	15.1	15.9
					X _T	0.828	0.747	0.553	0.570	0.645	0.667	0.686	0.694	0.709	0.678
1-1/2	47.6	1.875	19	0.75	C _v	3.42	8.78	14.6	22.2	27.7	31.6	34.0	35.1	36.0	37.2
					K _v	2.96	7.59	12.6	19.2	24.0	27.3	29.4	30.4	31.1	32.2
					X _T	0.635	0.649	0.594	0.455	0.457	0.504	0.563	0.625	0.648	0.640
	33.3	1.3125	19	0.75	C _v	2.84	6.74	11.3	17.4	22.1	25.6	27.7	28.7	29.1	29.3
					K _v	2.46	5.83	9.77	15.1	19.1	22.1	24.0	24.8	25.2	25.3
					X _T	0.669	0.709	0.563	0.424	0.401	0.428	0.487	0.569	0.661	0.711
2	58.7	2.3125	29	1.125	C _v	8.27	21.8	35.3	47.3	55.1	60.2	63.2	65.3	66.8	67.8
					K _v	7.15	18.9	30.5	40.9	47.7	52.1	54.7	56.5	57.8	58.6
					X _T	0.647	0.411	0.347	0.352	0.409	0.499	0.577	0.622	0.647	0.656
	33.3	1.3125	19	0.75	C _v	3.62	7.07	12.2	18.4	23.3	27.6	31.1	34.0	35.8	37.0
					K _v	3.13	6.12	10.6	15.9	20.2	23.9	26.9	29.4	31.0	32.0
					X _T	0.620	0.769	0.559	0.420	0.390	0.396	0.408	0.440	0.475	0.494
2-1/2	73.0	2.875	38	1.5	C _v	12.8	33.9	55.0	70.6	80.0	85.4	88.5	90.3	91.1	91.7
					K _v	11.1	29.3	47.6	61.1	69.2	73.9	76.6	78.1	78.8	79.3
					X _T	0.766	0.476	0.377	0.388	0.460	0.540	0.590	0.631	0.660	0.669
	47.6	1.875	19	0.75	C _v	3.07	8.65	15.3	23.4	31.2	36.8	43.4	48.3	52.1	55.8
					K _v	2.66	7.48	13.2	20.2	27.0	31.8	37.5	41.8	45.1	48.3
					X _T	0.766	0.766	0.613	0.450	0.384	0.389	0.380	0.399	0.420	0.428
3	87.3	3.4375	38	1.5	C _v	11.1	36.0	60.3	81.9	99.6	111	119	124	128	131
					K _v	9.60	31.1	52.2	70.8	86.2	96.0	103	107	111	113
					X _T	0.766	0.649	0.451	0.415	0.416	0.469	0.522	0.566	0.595	0.603
	58.7	2.3125	29	1.125	C _v	6.63	18.1	30.8	43.4	56.1	67.1	77.8	87.2	95.9	102
					K _v	5.73	15.7	26.6	37.5	48.5	58.0	67.3	75.4	83.0	88.2
					X _T	0.766	0.662	0.483	0.424	0.395	0.387	0.385	0.387	0.395	0.397
4	111.1	4.375	51	2	C _v	25.1	56.5	85.6	111	128	139	147	151	208	211
					K _v	21.7	48.9	74.0	96.0	111	120	127	131	180	183
					X _T	1.222	0.807	0.683	0.680	0.786	0.909	1.017	1.109	0.635	0.645
	73.0	2.875	38	1.5	C _v	12.8	33.9	56.6	76.4	96.3	114	130	143	156	164
					K _v	11.1	29.3	49.0	66.1	83.3	98.6	112	124	135	142
					X _T	0.766	0.471	0.350	0.332	0.317	0.325	0.331	0.349	0.361	0.377
6	177.8	7	51	2	C _v	54.1	114	174	231	281	319	349	369	387	401
					K _v	46.8	98.6	151	200	243	276	302	319	335	347
					X _T	0.407	0.453	0.409	0.367	0.383	0.419	0.450	0.487	0.514	0.532
8	203.2	8	76	3	C _v	84.6	229	360	462	531	607	660	695	712	735
					K _v	73.2	198	311	400	459	525	571	601	616	636
					X _T	0.729	0.409	0.346	0.354	0.410	0.451	0.507	0.560	0.602	0.633
			29	4	C _v	132	318	464	566	641	693	724	742	760	773
					K _v	114	275	401	490	554	599	626	642	657	669
					X _T	0.499	0.358	0.371	0.422	0.482	0.542	0.604	0.659	0.682	0.675
1. NPS 6 easy-e™ with restricted Whisper Trim not available. Use EW valve body where this trim is desired. Restricted trim.															

1. NPS 6 easy-e™ with restricted Whisper Trim not available. Use EW valve body where this trim is desired.
 Restricted trim.



Whisper Trim III																Linear Characteristic ⁽¹⁾	
Valve Size, ⁽²⁾ NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient		Valve Opening—Percent of Total Travel										X _T ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
A3 ΔP/P ₁ ≤0.6																	
6	136.5	5.375	76	3	C _V		4.67 ⁽⁴⁾	74.0	111	147	183	219	254	288	322	353	0.563
					K _V		4.04	64.0	96.0	127	158	189	220	249	279	305	---
B3 ΔP/P ₁ ≤0.75																	
6	136.5	5.375	76	3	C _V		4.67 ⁽⁴⁾	41.3	61.7	82.3	103	123	144	164	184	203	0.563
					K _V		4.04	35.7	53.4	71.2	89.1	106	125	142	159	176	---
C3 ΔP/P ₁ ≤0.85																	
6	136.5	5.375	76	3	C _V		4.67 ⁽⁴⁾	28.0	41.3	55.3	69.3	83.0	97.0	110	124	138	0.563
					K _V		4.04	24.2	35.7	47.8	59.9	71.8	83.9	95.2	107	119	---
D3 ΔP/P ₁ ≤0.99																	
6	136.5	5.375	76	3	C _V		4.67 ⁽⁴⁾	6.67	9.50	19.9	31.4	46.0	61.0	75.7	89.7	104	0.563
					K _V		4.04	5.77	8.22	17.2	27.2	39.8	52.8	65.5	77.6	90.0	---

1. Level D exhibits an equal percentage characteristic for the first 38 mm (1.5 inches) of travel, then linear characteristic.

2. NPS 6 easy-e with restricted Whisper Trim not available. Use EW valve body where this trim is desired.

3. This column lists XT factors for Whisper Trim III cages at 100% travel.

4. This coefficient is minimum rather than 10% open. Valves should not be required to throttle at less than the specified minimum coefficient for an extended period of time. Erosion damage to the valve may result.

Catalog 12

March 2012 - Page ES-9

Cavitrol™ III 2-Stage Micro-Flat
Flow Down

Cavitrol - Flow Down																	Linear Characteristic
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min	10	20	30	40	50	60	70	80	90	100	
1 ⁽³⁾	22.2	0.875	19	0.75	C _v	0.04	0.02	0.04	0.05	0.07	0.09	0.12	0.16	0.21	0.26	0.30	0.97
					K _v	0.03	0.02	0.03	0.04	0.06	0.08	0.10	0.14	0.18	0.22	0.26	
1 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.04	0.00	0.07	0.12	0.21	0.30	0.41	0.53	0.68	0.84	1.02	0.97
					K _v	0.03	0.00	0.06	0.10	0.18	0.26	0.35	0.46	0.59	0.73	0.88	
1 ⁽⁵⁾	25.4	1	28.5	1.125	C _v	0.05	0.00	0.02	0.17	0.32	0.48	0.65	0.80	1.04	1.36	1.66	0.97
					K _v	0.04	0.00	0.02	0.15	0.28	0.42	0.56	0.69	0.90	1.18	1.44	
1 ⁽⁵⁾	25.4	1	25.4	1	C _v	0.05	0.00	0.06	0.16	0.39	0.60	0.94	1.28	1.63	1.98	2.30	0.97
					K _v	0.04	0.00	0.05	0.14	0.34	0.52	0.81	1.11	1.41	1.71	1.99	
1-1/2 ⁽³⁾	22.2	0.875	19	0.75	C _v	0.04	0.02	0.04	0.05	0.07	0.09	0.12	0.16	0.21	0.26	0.30	0.97
					K _v	0.03	0.02	0.03	0.04	0.06	0.08	0.10	0.14	0.18	0.22	0.26	
1-1/2 ⁽⁵⁾	25.4	1	28.5	1.125	C _v	0.05	0.00	0.02	0.17	0.32	0.48	0.65	0.80	1.04	1.36	1.66	0.97
					K _v	0.04	0.00	0.02	0.15	0.28	0.42	0.56	0.69	0.90	1.18	1.44	
1-1/2 ⁽⁵⁾	25.4	1	25.4	1	C _v	0.05	0.00	0.06	0.16	0.39	0.60	0.94	1.28	1.63	1.98	2.30	0.97
					K _v	0.04	0.00	0.05	0.14	0.34	0.52	0.81	1.11	1.41	1.71	1.99	
1-1/2 ⁽⁵⁾	25.4	1	38.1	1.5	C _v	0.05	0.02	0.08	0.27	0.62	1.02	1.40	1.90	2.30	2.70	3.10	0.97
					K _v	0.04	0.02	0.07	0.23	0.54	0.88	1.21	1.64	1.99	2.34	2.68	
2 ⁽⁶⁾	22.2	0.875	19	0.75	C _v	0.04	0.02	0.04	0.05	0.07	0.09	0.12	0.16	0.21	0.26	0.30	0.97
					K _v	0.03	0.02	0.03	0.04	0.06	0.08	0.10	0.14	0.18	0.22	0.26	
2 ⁽⁵⁾	25.4	1	38.1	1.5	C _v	0.05	0.02	0.16	0.45	0.95	1.47	2.00	2.50	3.10	3.70	4.10	0.97
					K _v	0.04	0.02	0.14	0.39	0.82	1.27	1.73	2.16	2.68	3.20	3.55	
1. At 100% travel 2. Cavitrol III Micro-Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 3. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 3.869 cm ² / 0.601 In ² , 3/8" stem (optional 1/2" stem) 4. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 5.065 cm ² / 0.785 In ² , 1/2" stem 5. Flowing port: 19 mm / 0.75 Inch, Unbalanced Area: 5.065 cm ² / 0.785 In ² , 1/2" stem 6. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 3.869 cm ² / 0.601 In ² , 3/4" stem																	



ES Flow Down

Micro-Flat Anti-Cavitation Plug and Seat
Flow Down through the Port

Catalog 12
May 2013 - Page ES-10

CL150, 300, 600, Micro-Flat Anti-Cavitation Plug & Seat, with Flash Basket ⁽¹⁾ , Flow Down														Linear Characteristic		
Valve Size	Port Diameter ⁽²⁾		Travel		Flow Coefficient	Percent of Total Travel										FL ⁽⁴⁾
NPS	mm	inch	mm	inch		10 ⁽³⁾	20	30	40	50	60	70	80	90	100	
1, 1-1/2, 2	6.4	1/4	19	3/4	Cv	0.001	0.001	0.003	0.007	0.012	0.017	0.023	0.03	0.037	0.044	0.775
					Kv	0.0009	0.0009	0.0026	0.0060	0.0103	0.0146	0.0198	0.0258	0.0318	0.0378	
					Cv	0.001	0.002	0.013	0.029	0.049	0.072	0.097	0.124	0.154	0.18	0.775
					Kv	0.0009	0.0017	0.0112	0.0249	0.0421	0.0619	0.0834	0.1066	0.1324	0.1548	
					Cv	0.001	0.004	0.028	0.063	0.105	0.154	0.207	0.265	0.326	0.38	0.775
					Kv	0.0009	0.0034	0.0241	0.0542	0.0903	0.1324	0.1780	0.2279	0.2804	0.3268	
	9.5	3/8	19	3/4	Cv	0.001	0.005	0.03	0.068	0.115	0.169	0.229	0.294	0.364	0.437	0.775
					Kv	0.0009	0.0043	0.0258	0.0585	0.0989	0.1453	0.1969	0.2528	0.3130	0.3758	
					Cv	0.001	0.006	0.042	0.095	0.16	0.235	0.318	0.407	0.503	0.603	0.775
					Kv	0.0009	0.0052	0.0361	0.0817	0.1376	0.2021	0.2735	0.3500	0.4326	0.5186	
					Cv	0.001	0.008	0.06	0.136	0.23	0.337	0.457	0.587	0.726	0.873	0.775
					Kv	0.0009	0.0069	0.0516	0.1170	0.1978	0.2898	0.3930	0.5048	0.6244	0.7508	
	19.1	3/4	19	3/4	Cv	0.002	0.016	0.115	0.263	0.445	0.654	0.886	1.138	1.407	1.69	0.775
					Kv	0.0017	0.0138	0.0989	0.2262	0.3827	0.5624	0.7620	0.9787	1.2100	1.4534	
					Cv	0.002	0.03	0.229	0.524	0.887	1.306	1.77	2.274	2.813	3.383	0.775
					Kv	0.0017	0.0258	0.1969	0.4506	0.7628	1.1232	1.5222	1.9556	2.4192	2.9094	
1. For additional capacities, contact GIS. 2. Micro-flat Cavitation trims use a shutoff port diameter which is 0.125 inch larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 3. Clearance flow only 4. At 100% travel																

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Cavitrol are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2011, 2013 Fisher Controls International LLC. All rights reserved



Catalog 12

March 2012 - Page ET-1

Cavitrol™ III Cage

CL600 - Flow Down																	Linear Characteristic
Valve Size, NPS	Port Diameter		Total Travel		Minimum Throttling $C_v^{(1)}$	Flow Coefficient	Valve Opening—Percent of Total Travel										$F_L^{(3)}$
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
One Stage																	
1	33.3	1-5/16	25.4	1	1.9	C_v	0.25	0.48	2.36	5.04	7.36	9.47	11.2	13.1	14.6	15.5	0.90
						K_v	0.216	0.415	2.04	4.36	6.37	8.19	9.69	11.3	12.6	13.4	---
1-1/2	47.6	1-7/8	22.2	7/8	2.5	C_v	0.59	0.72	2.54	6.03	9.32	12.8	15.6	18.2	20.8	22.5	0.93
						K_v	0.510	0.623	2.20	5.22	8.06	11.1	13.5	15.7	18.0	19.5	---
2	58.7	2-5/16	28.6	1-1/8	3.9	C_v	0.84	1.49	6.68	12.3	17.3	22.1	26.7	30.9	34.4	36.1	0.93
						K_v	0.727	1.29	5.78	10.6	15.0	19.1	23.1	26.7	29.8	31.2	---
2-1/2	73.0	2-7/8	38.1 ⁽²⁾	1-1/2	4.2	C_v	0.84	6.83	16.2	25.0	33.0	41.2	48.8	55.5	61.7	64.4	0.91
						K_v	0.727	5.91	14.0	21.6	28.5	35.6	42.2	48.0	53.4	55.7	---
3	87.3	3-7/16	41.3 ⁽²⁾	1-5/8	4.6	C_v	1.65	10.8	22.3	34.3	45.3	55.5	64.7	72.7	80.0	86.7	0.89
						K_v	1.43	9.34	19.3	29.7	39.2	48.0	56.0	62.9	69.2	75.0	---
4	111.1	4-3/8	54.0 ⁽²⁾	2-1/8	5.2	C_v	3.47	22.7	43.3	63.4	81.8	100	116	131	144	151	0.90
						K_v	3.00	19.6	37.5	54.8	70.8	86.5	100	113	125	131	---
6 ⁽⁴⁾	177.8	7	57.2	2-1/4	10	C_v	4.6	30.0	65.3	99.7	134	165	195	219	241	259	0.91
						K_v	4.0	25.9	56.5	86.2	116	143	169	189	208	224	---
8	203.2	8	85.7	3-3/8	15	C_v	16.2	70.2	124	176	227	276	324	370	412	439	0.94
						K_v	14.0	60.7	107	152	196	239	280	320	356	380	---
Two Stage																	
1	25.4	1	25	1	0.28	C_v	0.11	0.41	1.08	1.75	2.43	3.10	3.78	4.45	5.12	5.80	0.98
						K_v	0.095	0.355	0.934	1.51	2.10	2.68	3.27	3.85	4.43	5.02	---
1-1/2	33.3	1-5/16	38	1-1/2	0.44	C_v	0.22	1.20	2.23	3.26	4.29	5.31	6.355	7.37	8.40	9.40	0.98
						K_v	0.19	1.04	1.93	2.82	3.71	4.59	5.50	6.38	7.27	8.13	---
2	47.6	1-7/8	51	2	0.92	C_v	0.80	3.05	5.29	7.56	9.83	12.1	14.3	16.5	18.8	21.0	0.98
						K_v	0.692	2.64	4.58	6.54	8.50	10.5	12.4	14.3	16.3	18.2	---
2-1/2	58.7	2-5/16	64	2-1/2	1.10	C_v	1.75	5.25	8.71	12.2	15.6	19.1	22.6	26.1	29.6	33.0	0.98
						K_v	1.51	4.54	7.53	10.6	13.5	16.5	19.5	22.6	25.6	28.5	---
3	73.0	2-7/8	76	3	1.20	C_v	3.14	8.23	13.3	18.5	23.5	28.7	33.8	38.9	44.0	49.0	0.98
						K_v	2.72	7.12	11.5	16.0	20.3	24.8	29.2	33.6	38.1	42.4	---
4	73.0	2-7/8	102	4	1.90	C_v	2.83	11.2	19.4	27.4	35.5	43.2	50.5	57.1	63.2	69.0	0.98
						K_v	2.45	9.69	16.8	23.7	30.7	37.4	43.7	49.4	54.7	59.7	---
6 ⁽⁴⁾	136.5	5-3/8	102	4	3.00	C_v	6.05	22.5	38.0	53.7	69.4	85.2	100	115	130	144	0.98
						K_v	5.23	19.5	32.9	46.5	60.0	73.7	86.5	99.5	112	125	---
8	177.8	7	152	6	7.00	C_v	19.8	47.5	74.5	101	129	156	184	211	238	265	0.98
						K_v	17.1	41.1	64.4	87.4	112	135	159	183	206	229	---
1. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period of time. Erosion damage to the valve seats may result. 2. Less than fully available travel. 3. At 100% travel. 4. These values are also used to size NPS 8 EAT valves.																	

FISHER®


EMERSON
 Process Management

This page is intentionally left blank.

Linear																	Linear	
																	Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L (1)	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100
12	279.4	11	102	4	SNC	C _v	40	155	300	450	610	770	940	1100	1250	1390	1500	0.88
						K _v	34.6	134	260	389	528	666	813	952	1081	1202	1298	---
						X _t	0.391	0.609	0.678	0.676	0.645	0.654	0.693	0.746	0.789	0.799	0.792	---
			140	5.5		C _v	40	206	415	630	852	1079	1295	1465	1557	1570	1570	0.88
						K _v	34.6	178	359	545	737	933	1120	1267	1347	1358	1358	---
						X _t	0.391	0.644	0.683	0.644	0.654	0.704	0.769	0.792	0.775	0.818	0.82	---
14	279.4	11	102	4	SNC	C _v	40	106	222	368	541	727	922	1109	1283	1437	1560	0.88
						K _v	34.6	92	192	319	468	629	797	959	1110	1243	1350	---
						X _t	0.391	0.837	0.811	0.749	0.703	0.703	0.722	0.748	0.769	0.774	0.777	---
			140	5.5		C _v	40	136	346	552	821	1092	1328	1516	1643	1708	1753	0.88
						K _v	34.6	118	299	477	710	944	1149	1311	1421	1477	1516	---
						X _t	0.391	0.851	0.813	0.736	0.707	0.723	0.752	0.766	0.764	0.782	0.788	---
16	279.4	11	102	4	SNC	C _v	40	73	169	314	495	698	909	1115	1305	1468	1601	0.88
						K _v	34.6	63	146	272	428	604	786	965	1128	1270	1385	---
						X _t	0.391	0.989	0.899	0.797	0.742	0.735	0.741	0.749	0.756	0.758	0.767	---
			140	5.5		C _v	40	90	300	500	800	1100	1350	1550	1700	1800	1875	0.88
						K _v	34.6	78	260	433	692	952	1168	1341	1471	1557	1622	---
						X _t	0.391	0.989	0.899	0.797	0.742	0.735	0.741	0.749	0.756	0.758	0.767	---
30	610	24	302	11.88	SN	C _v	100	906	2000	3080	4230	5290	6690	7710	8450	9260	9530	0.99
						K _v	87	784	1730	2664	3659	4576	5787	6669	7309	8010	8243	---
						X _T		0.7	0.73	0.72	0.75	0.72	0.74	0.71	0.74	0.72	0.71	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only

Equal Percentage																	Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100
12	279.4	11	140	5.5	SNC	C _v	22	43	84	123	182	280	424	618	873	1190	1380	0.88
						K _v	19.0	37	73	106	157	242	367	535	755	1029	1194	---
						X _t	0.391	0.75	0.737	0.715	0.656	0.595	0.57	0.578	0.625	0.692	0.804	---
14	279.4	11	140	5.5	SNC	C _v	22	51	95	139	193	277	406	582	803	1079	1397	0.88
						K _v	19.0	44	82	120	167	240	351	503	695	933	1208	---
						X _t	0.391	0.894	0.891	0.883	0.855	0.788	0.711	0.674	0.696	0.728	0.780	---
16	279.4	11	140	5.5	SNC	C _v	21	58	109	158	220	317	463	664	917	1232	1595	0.88
						K _v	20.3	56.0	105	153	212	306	447	641	885	1189	1539	---
						X _t	0.391	0.99	0.994	0.995	0.987	0.916	0.805	0.738	0.743	0.752	0.764	---
30	610	24	276	10.88	SN	C _v	70	126	305	520	876	1343	2200	3599	5150	6563	7690	0.99
						K _v	61	109	264	450	758	1162	1903	3113	4455	5677	6652	---
						X _T		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.65	0.68	0.7	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Whisper Trim III - Level A1 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100
12	279.4	11	140	5.5	SNC	C _v	25	144	295	441	576	696	803	904	991	1070	1137	0.89
						K _v		125	255	381	498	602	695	782	857	926	984	---
						X _t		0.62	0.62	0.62	0.65	0.7	0.75	0.81	0.86	0.86	0.86	---
			203	8	LNC	C _v	25	212	428	622	785	930	1052	1150	1229	1285	1315	0.89
						K _v		183	370	538	679	804	910	995	1063	1112	1137	---
						X _t		0.619	0.620	0.665	0.739	0.827	0.856	0.854	0.852	0.849	0.847	---
14	279.4	11	140	5.5	SNC	C _v	25	144	295	441	584	721	851	981	1104	1225	1318	0.89
						K _v		125	255	381	505	623	736	849	955	1059	1140	---
						X _t		0.62	0.62	0.62	0.63	0.65	0.67	0.70	0.72	0.72	0.73	---
			203	8	LNC	C _v	25	212	428	635	828	1016	1194	1332	1420	1482	1515	0.89
						K _v		183	370	549	716	879	1033	1153	1229	1282	1310	---
						X _t		0.619	0.620	0.639	0.668	0.703	0.715	0.739	0.800	0.823	0.824	---
16	279.4	11	140	5.5	SNC	C _v	25	144	295	441	589	737	883	1033	1179	1328	1439	0.89
						K _v		125	255	381	509	638	764	894	1020	1149	1245	---
						X _t		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.65	---
			203	8	LNC	C _v	25	212	428	644	857	1073	1289	1454	1548	1613	1648	0.89
						K _v		183	370	557	741	928	1115	1258	1339	1395	1425	---
						X _t		0.619	0.620	0.621	0.621	0.621	0.621	0.663	0.765	0.805	0.809	---
30	660	26	276	10.88	SN	C _v	60	728	1490	2254	3018	3782	4543	5123	5638	6099	6505	0.99
						K _v		630	1289	1950	2611	3271	3930	4431	4877	5276	5627	---
						X _T		0.6	0.6	0.6	0.6	0.6	0.56	0.57	0.58	0.6	0.61	---
			505	19.88	LN	C _v	60	1380	2720	4040	5200	6040	6700	7040	7210	7440	7670	0.99
						K _v	52	1194	2353	3495	4498	5225	5796	6090	6237	6436	6635	---
						X _T		0.32	0.36	0.4	0.42	0.49	0.51	0.56	0.61	0.65	0.72	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only

Catalog 12

March 2012 - Page ET-5

Whisper Trim™ III - Level A3

Whisper Trim - Level A3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Construction	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	C _v	17	123	253	381	508	617	719	813	901	978	1049	0.89
						K _v		106	219	330	439	534	622	703	779	846	907	---
						X _t		0.62	0.62	0.62	0.62	0.66	0.71	0.76	0.81	0.86	0.86	---
			203	8	LNC	C _v	17	181	371	550	705	839	960	1063	1149	1219	1272	0.89
						K _v		157	321	475	610	726	831	919	994	1055	1100	---
						X _t		0.619	0.620	0.638	0.700	0.769	0.851	0.856	0.854	0.852	0.850	---
14	279.4	11	140	5.5	SNC	C _v	17	123	253	381	509	630	748	863	978	1086	1192	0.89
						K _v		106	219	330	440	545	647	747	846	939	1031	---
						X _t		0.62	0.62	0.62	0.62	0.64	0.66	0.68	0.70	0.72	0.72	---
			203	8	LNC	C _v	17	181	371	554	731	896	1059	1212	1331	1410	1467	0.89
						K _v		157	321	479	632	775	916	1048	1152	1219	1269	---
						X _t		0.62	0.62	0.63	0.65	0.68	0.71	0.72	0.74	0.79	0.82	---
16	279.4	11	140	5.5	SNC	C _v	17	123	253	381	510	638	767	897	1029	1158	1287	0.89
						K _v		106	219	330	441	552	663	776	890	1002	1113	---
						X _t		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	C _v	17	181	371	557	748	934	1125	1311	1453	1537	1597	0.89
						K _v		157	321	482	647	808	973	1134	1256	1329	1381	---
						X _t		0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.663	0.751	0.805	---
30	660	26	276	10.88	SN	C _v	50	644	1316	1988	2660	3331	4003	4675	5153	5608	6021	0.99
						K _v	43	557	1138	1720	2301	2881	3463	4044	4457	4851	5208	---
						X _T		0.6	0.6	0.6	0.6	0.6	0.58	0.55	0.57	0.58	0.59	---
			505	19.88	LN	C _v	50	1092	2222	3352	4472	5335	6045	6639	7113	7462	7695	0.99
						K _v	43	945	1922	2899	3868	4615	5229	5743	6153	6455	6656	---
						X _T		0.6	0.6	0.6	0.56	0.57	0.59	0.62	0.65	0.68	0.72	---
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Whisper Trim - Level B1 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	537	597	659	721	0.89
						Kv		68	136	206	269	332	401	465	516	570	624	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.64	0.66	0.68	0.71	---
			203	8	LNC	Cv	21	120	228	337	453	557	646	730	813	889	949	0.89
						Kv		104	197	291	392	482	559	631	703	769	821	---
						Xt		0.618	0.619	0.620	0.620	0.641	0.675	0.713	0.756	0.803	0.846	---
14	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	541	607	678	751	0.89
						Kv		68	136	206	269	332	401	468	525	586	650	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.64	0.66	---
			203	8	LNC	Cv	21	120	228	337	453	562	663	761	863	962	1044	0.89
						Kv		104	197	292	392	486	573	658	747	832	903	---
						Xt		0.62	0.62	0.62	0.62	0.63	0.64	0.66	0.68	0.69	0.71	---
16	279.4	11	140	5.5	SNC	Cv	21	79	157	238	311	384	464	543	614	690	771	0.89
						Kv		68	136	206	269	332	401	470	531	597	667	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	21	120	228	337	453	566	674	782	897	1011	1107	0.89
						Kv		104	197	291	392	489	583	676	776	875	958	---
						Xt		0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		

Whisper Trim - Level B3 - Flow Up																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100
12	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	528	595	654	716	0.89
						Kv		67	131	199	264	330	396	457	515	566	619	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.66	0.68	0.71	---
			203	8	LNC	Cv	15	114	222	336	445	550	641	728	808	883	942	0.89
						Kv		99	192	291	385	476	554	630	699	764	815	---
						Xt		0.617	0.619	0.62	0.62	0.639	0.674	0.712	0.754	0.799	0.841	---
14	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	531	605	673	745	0.89
						Kv		67	131	199	264	330	396	459	523	582	645	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.64	0.64	0.66	---
			203	8	LNC	Cv	15	114	222	336	445	555	657	759	858	954	1045	0.89
						Kv		99	192	291	385	480	568	657	742	826	904	---
						Xt		0.62	0.62	0.62	0.62	0.63	0.64	0.66	0.67	0.69	0.71	---
16	279.4	11	140	5.5	SNC	Cv	15	78	152	230	305	381	458	533	612	685	765	0.89
						Kv		67	131	199	264	330	396	461	529	593	662	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	15	114	222	336	445	558	668	780	891	1002	1114	0.89
						Kv		98	192	291	385	483	578	675	771	867	963	---
						Xt		0.617	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		

Catalog 12

March 2012 - Page ET-7

Whisper Trim™ III - Level C1 and C3

Whisper Trim - Level C1 - Flow Up																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L (1)	
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90		100
12	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	497	0.89
						Kv		53	89	138	178	219	266	304	349	393	430	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	18	84	153	222	293	368	444	512	571	628	688	0.89
						Kv		73	132	192	253	318	384	443	494	543	595	---
						Xt		0.616	0.619	0.620	0.620	0.620	0.621	0.627	0.647	0.670	0.695	---
14	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	498	0.89
						Kv		53	89	138	178	219	266	304	349	393	430	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	18	84	153	222	293	368	444	514	578	642	711	0.89
						Kv		73	132	192	253	318	384	444	500	556	615	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.65	---
16	279.4	11	140	5.5	SNC	Cv	18	61	103	159	206	253	308	351	404	454	498	0.89
						Kv		53	89	138	178	219	266	304	349	393	431	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	18	84	153	222	293	368	444	515	583	652	727	0.89
						Kv		73	133	192	253	318	384	445	504	564	629	---
						Xt		0.616	0.619	0.620	0.620	0.620	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		

Whisper Trim - Level C3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479	0.89
						Kv		45	86	125	165	208	250	289	329	372	414	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	14	73	143	209	281	349	418	490	548	607	651	0.89
						Kv		63	124	181	243	302	362	424	474	525	563	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.620	0.639	0.662	0.680	---
14	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479	0.89
						Kv		45	86	125	165	208	250	289	329	372	414	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	14	73	143	209	282	349	418	490	553	619	679	0.89
						Kv		63	124	181	244	302	362	424	478	535	587	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.64	---
16	279.4	11	140	5.5	SNC	Cv	14	52	99	144	191	241	289	334	380	430	479	0.89
						Kv		45	86	125	165	208	250	289	329	372	414	---
						Xt		0.61	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	0.62	---
			203	8	LNC	Cv	14	73	143	209	282	349	418	490	556	627	697	0.89
						Kv		63	124	181	243	302	361	424	481	542	603	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	---
1. At 100% travel. 2. Clearance flow only																		



Large ET CL125 - CL600

Whisper Trim™ III - Level D3
and WhisperFlo Trim - Level X

Catalog 12
March 2012 - Page ET-8

Whisper Trim - Level D3 - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	445	496	549	594	0.89
						Kv		58	114	166	224	278	332	385	429	475	514	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.636	0.658	0.685	0.710	---
14	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	449	505	566	622	
						Kv		58	114	166	224	278	332	388	437	489	538	---
						Xt		0.62	0.62	0.62	0.62	0.62	0.62	0.63	0.64	0.65	0.66	---
16	254	10	203	8	LNC	Cv	12	67	132	192	259	321	384	451	511	577	641	0.89
						Kv		58	114	166	224	278	332	390	442	499	554	---
						Xt		0.615	0.618	0.619	0.620	0.620	0.621	0.621	0.621	0.621	0.621	---
30	610	24	505	19.88	LN	Cv	35	400	792	1183	1575	1968	2362	2756	3150	3545	3939	0.99
						Kv		346	685	1023	1362	1702	2043	2384	2725	3066	3407	---
						Xt		0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.57	0.55	---
1. At 100% travel. 2. Clearance flow only																		

WhisperFlo Trim - Level X - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L (1)
	mm	Inches	mm	Inches			Min(2)	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	62.2	92	180	274	366	454	538	616	689	757	820	
						Xt	0.53	0.71	0.7	0.69	0.68	0.68	0.69	0.69	0.7	0.71	0.73	---
			203	8	LNC	Cv	62.2	128	257	382	508	633	728	820	901	978	1019	0.89
						Xt	0.886	0.886	0.777	0.799	0.737	0.688	0.727	0.776	0.734	0.721	0.758	---
14	279.4	11	140	5.5	SNC	Cv	62.2	92	180	276	370	461	549	633	714	791	863	
						Xt	0.53	0.71	0.70	0.69	0.68	0.67	0.68	0.67	0.68	0.68	0.69	---
			203	8	LNC	Cv	62.2	126	258	386	517	642	762	866	961	1049	1113	
						Xt	0.69	0.69	0.66	0.69	0.66	0.65	0.66	0.71	0.70	0.70	0.73	---
16	279.4	11	140	5.5	SNC	Cv	62.2	92	180	277	372	465	556	645	730	813	892	
						Xt	0.53	0.71	0.7	0.69	0.68	0.67	0.67	0.66	0.66	0.66	0.66	---
			203	8	LNC	Cv	62.2	124	258	388	523	648	784	896	1001	1096	1175	
						Xt	0.556	0.556	0.58	0.614	0.612	0.629	0.615	0.665	0.678	0.691	0.719	---
1. At 100% travel. 2. Clearance flow only																		

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher, Whisper Trim, and WhisperFlo are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

March 2012 - Page ET-9

WhisperFlo™ Trim - Level Y and Level Z

WhisperFlo Trim - Level Y - Flow Up																		Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Construction	Flow Coefficient	Valve Opening—Percent of Total Travel												F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100		
12	279.4	11	140	5.5	SNC	Cv	35	55	109	168	225	282	338	392	445	496	546	0.89	
						Xt	0.53	0.56	0.55	0.55	0.54	0.54	0.54	0.54	0.54	0.54	0.55	---	
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900	0.89	
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	---	
14	279.4	11	140	5.5	SNC	Cv	35	55	109	168	226	284	340	396	452	505	558		
						Xt	0.53	0.56	0.56	0.55	0.54	0.54	0.54	0.53	0.53	0.53	0.54	---	
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900		
						Xt	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	---	
16	279.4	11	140	5.5	SNC	Cv	35	55	109	168	227	285	342	399	456	511	566		
						Xt	0.53	0.56	0.56	0.55	0.54	0.54	0.54	0.53	0.53	0.53	0.53	---	
			203	8	LNC	Cv	35	90	180	270	360	450	540	630	720	810	900		
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	---	
1. At 100% travel. 2. Clearance flow only																			

1. At 100% travel.
2. Clearance flow only

WhisperFlo Trim - Level Z - Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Construction	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	140	5.5	SNC	Cv	21	42	80	119	160	202	242	282	322	361	399	
						Xt	0.53	0.44	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	0.89
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532
14	279.4	11	140	5.5	SNC	Cv	21	42	80	119	161	202	243	284	324	364	404	
						Xt	0.53	0.44	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.42
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	
						Xt	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
16	279.4	11	140	5.5	SNC	Cv	21	42	80	119	161	202	244	285	326	366	407	
						Xt	0.53	0.44	0.44	0.43	0.43	0.43	0.43	0.42	0.42	0.42	0.42	0.42
			203	8	LNC	Cv	21	55	110	165	220	275	330	385	440	495	550	
						Xt	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532	0.532
1. At 100% travel. 2. Clearance flow only																		

1. At 100% travel.
2. Clearance flow only



Cavitrol III Trim - One Stage - Flow Down																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Constr uction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
12	279.4	11	203	8	LNC	Cv	40	132	302	462	607	736	849	946	1030	1100	1160	0.91
						Kv	34.6	114	261	400	525	637	734	818	891	952	1003	---
14	279.4	11	203	8	LNC	Cv	40	132	303	467	620	759	886	996	1096	1184	1262	0.91
						Kv	34.6	114	262	404	536	657	766	862	948	1024	1092	---
16	279.4	11	203	8	LNC	Cv	40	132	304	471	628	775	910	1030	1140	1240	1330	0.91
						Kv	34.6	114	263	407	543	670	787	891	986	1073	1150	---
1. At 100% travel. 2. Clearance flow only																		

Notes: All other Fisher ET flow coefficients are identical to the Fisher ED. Refer to the ED information using all flange ratings and cage styles. For additional ET valve body information refer to Bulletin 51.1:ET.

Catalog 12March 2012 - Page ET-11

The Fisher ET-C valve has flow coefficients identical to the NPS 3 through 8 Fisher ED valve with full-sized port. Please refer to those coefficients. For additional ET-C valve information, refer to Bulletin 51.1:easy-e™ Cryogenic.



The Fisher ETR valve has flow coefficients identical to the NPS 1 to 4, CL125-600 ED valve. Please refer to those coefficients. For additional ETR valve body information, refer to Bulletin 51.1:ET.

Linear																		Linear Characteristic			
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L		
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100			
EUT-2, EUD, EUT	16	374.7	14.75	102	4.00	SNC	C _V	46	270	520	790	1080	1380	1690	1980	2240	2450	2630	0.88		
							K _V	39.8	234	450	683	934	1194	1462	1713	1938	2119	2275	---		
							X _T	0.391	0.643	0.684	0.667	0.645	0.650	0.664	0.694	0.721	0.749	0.755	---		
		374.7	14.75	127	5.00	SNC	C _V	46	335	650	1000	1380	1770	2120	2410	2630	2780	2860	0.88		
							K _V	39.8	290	562	865	1194	1531	1834	2085	2275	2405	2474	---		
							X _T	0.391	0.650	0.677	0.652	0.650	0.666	0.709	0.745	0.755	0.739	0.763	---		
EUD, EUT	20	436.6	18.25	203	8.00	SND	C _V	56	315	625	920	1230	1570	1920	2260	2530	2800	3010	0.89		
							K _V	48.4	272	541	796	1064	1358	1661	1955	2188	2422	2604	---		
							X _T	0.391	0.655	0.653	0.673	0.671	0.649	0.650	0.650	0.663	0.667	0.684	---		
		463.6	18.25	276	10.88	SND	C _V	56	255	670	1030	1460	1930	2370	2780	3100	3390	3650	0.89		
							K _V	48.4	221	580	891	1263	1669	2050	2405	2682	2932	3157	---		
							X _T	0.391	0.648	0.656	0.681	0.656	0.649	0.653	0.667	0.690	0.719	0.733	---		
		463.6	18.25	378	14.88	LND	C _V	56	375	865	1370	1940	2460	2910	3330	3614	3811	3920	0.89		
							K _V	48.4	324	748	1185	1678	2128	2517	2880	3126	3296	3391	---		
							X _T	0.391	0.651	0.674	0.668	0.651	0.661	0.676	0.707	0.736	0.755	0.748	---		
		EUT-2	20	501.7	19.75	203	8.00	SND	C _V	60	340	675	990	1340	1710	2110	2420	2720	2960	3180	0.89
									K _V	51.9	294	584	856	1159	1479	1825	2093	2353	2560	2751	---
									X _T	0.391	0.654	0.664	0.682	0.668	0.656	0.647	0.659	0.665	0.681	0.694	---
501.7	19.75			276	10.88	SND	C _V	60	465	905	1370	1880	2360	2760	3080	3350	3610	3830	0.89		
							K _V	51.9	402	783	1185	1626	2041	2387	2664	2898	3123	3313	---		
							X _T	0.391	0.650	0.673	0.665	0.654	0.657	0.669	0.685	0.711	0.726	0.742	---		
501.7	19.75			378	14.88	LND	C _V	60	410	935	1500	2130	2650	3070	3510	3870	4150	4340	0.89		
							K _V	51.9	355	809	1298	1842	2292	2656	3036	3348	3590	3754	---		
							X _T	0.391	0.648	0.678	0.659	0.648	0.661	0.690	0.718	0.749	0.753	0.737	---		



EUT-2, EUD, and EUT CL150, 300, and 600

Equal Percentage Cages
Flow Down through the Port

Catalog 12
March 2012 - Page EU-2

Equal Percentage																	Equal Percentage Characteristic				
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L			
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90		100		
EUT-2, EUD, EUT	16	374.7	14.75	102	4.00	SNC	C _V	23	49.0	87.0	130	188	274	426	640	915	1250	1630	0.78		
							K _V	19.9	42.4	75.3	112	163	237	368	554	791	1081	1410	---		
							X _T	0.391	0.625	0.634	0.668	0.673	0.643	0.591	0.574	0.577	0.593	0.621	---		
		374.7	14.75	127	5.00	SNC	C _V	23	58.1	106	166	274	464	758	1150	1630	2210	2540	0.78		
							K _V	19.9	50.3	91.7	144	237	401	656	995	1410	1912	2197	---		
							X _T	0.391	0.613	0.647	0.689	0.643	0.585	0.565	0.589	0.621	0.623	0.685	---		
EUD, EUT	20	463.6	18.25	203	8.00	SND	C _V	25	67.5	113	174	282	439	726	1170	1700	2200	2680	0.80		
							K _V	21.6	58.4	97.7	151	244	380	628	1012	1471	1903	2318	---		
							X _T	0.391	0.677	0.624	0.647	0.681	0.645	0.584	0.566	0.585	0.602	0.621	---		
		463.6	18.25	276	10.88	SND	C _V	25	76.8	132	204	333	535	880	1390	2000	2570	3250	0.80		
							K _V	21.6	66.4	114	176	288	463	761	1202	1730	2223	2811	---		
							X _T	0.391	0.657	0.633	0.666	0.670	0.616	0.580	0.573	0.597	0.622	0.628	---		
		463.6	18.25	378	14.88	LND	C _V	25	86.4	154	241	396	658	1080	1660	2360	3140	3760	0.80		
							K _V	21.6	74.7	133	208	343	569	934	1436	2041	2716	3252	---		
							X _T	0.391	0.629	0.643	0.678	0.653	0.595	0.566	0.581	0.613	0.624	0.658	---		
		EUT-2	20	501.7	19.75	203	8.00	SND	C _V	30	69.8	117	180	293	460	759	1220	1760	2280	2800	0.80
									K _V	25.9	60.4	101	156	253	398	657	1055	1522	1972	2422	---
									X _T	0.391	0.673	0.628	0.656	0.681	0.638	0.584	0.566	0.591	0.608	0.623	---
501.7	19.75			276	10.88	SND	C _V	30	79.3	137	213	348	562	924	1450	2080	2700	3410	0.80		
							K _V	25.9	68.6	119	184	301	486	799	1254	1799	2336	2950	---		
							X _T	0.391	0.651	0.636	0.665	0.659	0.613	0.578	0.576	0.603	0.621	0.627	---		
501.7	19.75			378	14.88	LND	C _V	30	88.6	160	250	412	693	1130	1730	2460	3300	3860	0.80		
							K _V	25.9	76.6	138	216	356	599	977	1496	2128	2855	3339	---		
							X _T	0.391	0.620	0.645	0.686	0.651	0.590	0.569	0.587	0.616	0.621	0.677	---		
1. Construction—SNC = short neck, cast windows; SND = short neck, drilled windows; LND = long neck, drilled windows. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																					

1. Construction—SNC = short neck, cast windows; SND = short neck, drilled windows; LND = long neck, drilled windows.
2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.

EUT-2, EUD, and EUT Whisper Trim III Trim—Level A1 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _v	38	335	677	1019	1298	1529	1721	1871	1985	2059	2095	0.89
							K _v		290	585	882	1123	1322	1488	1618	1717	1781	1812	---
							X _T		0.436	0.433	0.432	0.471	0.533	0.589	0.616	0.647	0.686	0.732	---
		374.7	14.75	226	8.88	LN	C _v	38	361	734	1115	1395	1629	1819	1957	2050	2095	2099	0.89
							K _v		312	635	964	1207	1409	1573	1693	1773	1812	1816	---
							X _T		0.435	0.433	0.437	0.497	0.572	0.606	0.640	0.681	0.731	0.789	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _v	42	353	732	1104	1389	1628	1817	1960	2057	2106	2113	0.89
							K _v		305	633	955	1201	1408	1572	1695	1779	1822	1828	---
							X _T		0.436	0.433	0.432	0.490	0.563	0.603	0.635	0.674	0.722	0.780	---
		412.8	16.25	226	8.88	LN	C _v	42	398	810	1205	1500	1737	1918	2039	2104	2115	2115	0.89
							K _v		344	701	1042	1298	1503	1659	1764	1820	1829	1829	---
							X _T		0.435	0.433	0.450	0.520	0.590	0.623	0.664	0.715	0.779	0.825	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _v	38	402	824	1212	1506	1743	1919	2036	2093	2100	2100	0.89
							K _v		348	713	1048	1303	1508	1660	1761	1810	1817	1817	---
							X _T		0.435	0.433	0.456	0.529	0.594	0.628	0.671	0.725	0.790	0.834	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _v	42	444	909	1310	1614	1847	2008	2096	2116	2116	2116	0.89
							K _v		384	786	1133	1396	1598	1737	1813	1830	1830	1830	---
							X _T		0.435	0.433	0.472	0.557	0.608	0.650	0.703	0.773	0.827	0.851	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _v	47	547	1123	1699	2128	2489	2776	2992	3135	3205	3214	0.89
							K _v		473	972	1470	1841	2153	2402	2588	2711	2773	2780	---
							X _T		0.434	0.433	0.432	0.494	0.567	0.604	0.637	0.677	0.726	0.784	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _v	50	593	1217	1841	2351	2767	3111	3382	3580	3706	3760	0.89
							K _v		513	1053	1593	2034	2394	2691	2925	3097	3206	3252	---
							X _T		0.434	0.433	0.432	0.475	0.538	0.592	0.619	0.652	0.692	0.741	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _v	47	709	1441	2058	2523	2866	3096	3205	3217	3217	3217	0.89
							K _v		614	1247	1780	2182	2479	2678	2773	2782	2782	2782	---
							X _T		0.434	0.432	0.482	0.575	0.616	0.662	0.722	0.795	0.840	0.852	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _v	50	707	1451	2143	2664	3087	3409	3626	3743	3765	3765	0.89
							K _v		612	1255	1853	2304	2670	2948	3137	3238	3257	3257	---
							X _T		0.434	0.432	0.450	0.520	0.590	0.623	0.663	0.714	0.777	0.826	---

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.



EUT-2, EUD, and EUT CL150, 300, and 600

Whisper Trim™ III--Level A3
Flow Up through the Port

Catalog 12
March 2012 - Page EU-4

EUT-2, EUD, and EUT Whisper Trim III Trim—Level A3 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _V	25	290	593	892	1178	1396	1590	1749	1880	1980	2049	0.89
							K _V		251	513	772	1019	1208	1375	1513	1626	1713	1772	---
							X _T		0.436	0.433	0.433	0.447	0.495	0.554	0.594	0.618	0.646	0.679	---
		374.7	14.75	226	8.88	LN	C _V	25	326	658	991	1280	1507	1698	1854	1971	2049	2091	0.89
							K _V		282	569	857	1107	1304	1469	1604	1705	1772	1809	---
							X _T		0.436	0.433	0.432	0.467	0.526	0.586	0.612	0.643	0.678	0.723	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _V	28	317	652	979	1270	1497	1693	1849	1970	2054	2100	0.89
							K _V		274	564	847	1099	1295	1464	1599	1704	1777	1817	---
							X _T		0.436	0.433	0.433	0.463	0.520	0.584	0.609	0.638	0.673	0.714	---
		412.8	16.25	226	8.88	LN	C _V	28	356	721	1088	1376	1609	1799	1947	2046	2101	2113	0.89
							K _V		308	624	941	1190	1392	1556	1684	1770	1817	1828	---
							X _T		0.436	0.433	0.432	0.487	0.556	0.600	0.631	0.668	0.714	0.771	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _V	25	359	732	1106	1387	1622	1809	1950	2044	2092	2099	0.89
							K _V		310	634	957	1200	1403	1565	1687	1768	1810	1816	---
							X _T		0.435	0.433	0.432	0.492	0.565	0.604	0.636	0.675	0.723	0.781	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _V	28	393	803	1192	1486	1724	1905	2030	2099	2115	2115	0.89
							K _V		340	695	1031	1285	1491	1648	1756	1816	1829	1829	---
							X _T		0.435	0.433	0.448	0.516	0.588	0.620	0.660	0.709	0.771	0.821	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _V	31	470	976	1471	1912	2259	2555	2795	2980	3112	3189	0.89
							K _V		407	844	1272	1654	1954	2210	2418	2578	2692	2758	---
							X _T		0.435	0.433	0.432	0.461	0.517	0.583	0.607	0.635	0.669	0.710	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _V	33	509	1056	1592	2103	2498	2843	3132	3365	3547	3671	0.89
							K _V		440	914	1377	1819	2161	2459	2709	2911	3068	3175	---
							X _T		0.435	0.433	0.432	0.446	0.495	0.553	0.594	0.618	0.646	0.678	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _V	31	612	1248	1843	2293	2655	2926	3108	3201	3215	3215	0.89
							K _V		529	1079	1594	1984	2297	2531	2688	2769	2781	2781	---
							X _T		0.434	0.433	0.452	0.523	0.591	0.625	0.667	0.719	0.783	0.830	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _V	33	609	1253	1896	2398	2820	3159	3426	3615	3726	3763	0.89
							K _V		527	1083	1640	2075	2439	2732	2963	3127	3223	3255	---
							X _T		0.434	0.433	0.432	0.481	0.548	0.596	0.625	0.661	0.703	0.757	---
1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																			

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2008, 2012 Fisher Controls International LLC. All rights reserved



EUT-2, EUD, and EUT Whisper Trim III Trim—Level B1 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _V	32	197	374	554	746	933	1111	1248	1385	1509	1603	0.89
							K _V		170	324	479	645	807	961	1080	1198	1305	1387	---
							X _T		0.438	0.435	0.433	0.433	0.432	0.432	0.461	0.493	0.528	0.56	---
		374.7	14.75	226	8.88	LN	C _V	32	207	416	627	824	1025	1207	1359	1488	1614	1726	0.89
							K _V		179	360	542	713	887	1044	1176	1287	1396	1493	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.453	0.486	0.521	0.564	0.591	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _V	35	215	408	605	814	1018	1190	1337	1477	1604	1699	0.89
							K _V		186	353	523	704	881	1029	1157	1278	1387	1470	---
							X _T		0.438	0.435	0.433	0.433	0.432	0.448	0.479	0.515	0.556	0.586	---
		412.8	16.25	226	8.88	LN	C _V	35	226	454	683	899	1118	1294	1451	1583	1709	1802	0.89
							K _V		195	393	591	778	967	1119	1255	1369	1478	1559	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.469	0.507	0.548	0.587	0.601	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _V	32	242	467	691	915	1132	1305	1464	1606	1728	1818	0.89
							K _V		209	404	598	791	979	1129	1266	1389	1495	1573	---
							X _T		0.437	0.434	0.433	0.432	0.438	0.473	0.514	0.56	0.591	0.606	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _V	35	264	510	754	999	1215	1396	1559	1701	1821	1907	0.89
							K _V		228	441	652	864	1051	1208	1349	1471	1575	1650	---
							X _T		0.437	0.434	0.433	0.432	0.452	0.493	0.54	0.586	0.604	0.622	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _V	39	314	632	928	1247	1542	1824	2043	2260	2440	2614	0.89
							K _V		292	587	862	1159	1432	1724	1937	2151	2331	2508	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.450	0.481	0.518	0.556	0.588	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _V	42	337	679	996	1340	1656	1993	2239	2487	2695	2899	0.89
							K _V		292	587	862	1159	1432	1724	1937	2151	2331	2508	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.435	0.462	0.494	0.526	0.565	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _V	39	396	793	1194	1583	1905	2189	2438	2646	2821	2968	0.89
							K _V		343	686	1033	1370	1648	1893	2109	2289	2440	2567	---
							X _T		0.436	0.433	0.432	0.432	0.460	0.504	0.555	0.591	0.611	0.634	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _V	42	405	786	1190	1579	1960	2276	2551	2793	3019	3209	0.89
							K _V		350	680	1029	1366	1696	1968	2206	2416	2612	2776	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.466	0.503	0.543	0.585	0.601	---
1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																			

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

EUT-2, EUD, and EUT CL150, 300, and 600

Whisper Trim™ III--Level B3
Flow Up through the Port

Catalog 12
March 2012 - Page EU-6

EUT-2, EUD, and EUT Whisper Trim III Trim—Level B3 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _V	21	178	349	528	700	878	1052	1201	1331	1451	1555	0.89
							K _V		154	302	457	606	759	910	1039	1151	1255	1345	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.452	0.48	0.511	0.543	---
		374.7	14.75	226	8.88	LN	C _V	21	197	388	584	780	971	1156	1300	1439	1559	1660	0.89
							K _V		170	336	505	675	840	1000	1125	1245	1349	1436	---
							X _T		0.438	0.435	0.433	0.432	0.432	0.443	0.473	0.507	0.544	0.582	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _V	24	195	382	578	767	962	1143	1291	1426	1549	1654	0.89
							K _V		169	330	500	663	832	989	1117	1233	1340	1431	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.439	0.469	0.501	0.537	0.575	---
		412.8	16.25	226	8.88	LN	C _V	24	215	425	639	854	1063	1244	1395	1538	1659	1759	0.89
							K _V		186	368	553	739	919	1076	1207	1330	1435	1522	---
							X _T		0.439	0.435	0.433	0.432	0.432	0.458	0.493	0.533	0.577	0.594	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _V	21	215	436	651	865	1082	1258	1412	1549	1672	1772	0.89
							K _V		186	377	563	748	936	1088	1221	1340	1446	1533	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.463	0.5	0.54	0.583	0.598	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _V	24	236	478	713	947	1170	1351	1510	1648	1770	1867	0.89
							K _V		204	413	617	819	1012	1169	1306	1426	1531	1615	---
							X _T		0.438	0.434	0.433	0.432	0.444	0.482	0.524	0.572	0.596	0.613	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _V	26	292	588	884	1181	1478	1756	1982	2190	2378	2547	0.89
							K _V		252	508	765	1021	1278	1519	1715	1894	2057	2203	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.441	0.471	0.505	0.542	0.582	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _V	28	314	633	952	1271	1591	1911	2175	2411	2628	2825	0.89
							K _V		272	548	823	1100	1377	1653	1882	2086	2273	2444	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.454	0.483	0.515	0.550	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _V	26	380	753	1136	1510	1847	2121	2367	2580	2762	2914	0.89
							K _V		329	651	983	1306	1598	1835	2048	2232	2390	2521	---
							X _T		0.436	0.433	0.432	0.432	0.453	0.493	0.539	0.585	0.603	0.624	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _V	28	379	755	1129	1512	1888	2199	2477	2724	2943	3140	0.89
							K _V		328	653	977	1308	1633	1902	2143	2356	2545	2716	---
							X _T		0.436	0.433	0.433	0.432	0.432	0.457	0.492	0.531	0.574	0.595	---
1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																			

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2008, 2012 Fisher Controls International LLC. All rights reserved



EUT-2, EUD, and EUT Whisper Trim III Trim—Level C1 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _v	27	131	244	351	460	577	696	811	919	1026	1132	0.89
							K _v		113	211	304	398	499	602	702	795	887	979	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.431	0.439	---
		374.7	14.75	226	8.88	LN	C _v	27	132	264	396	518	637	763	897	1024	1133	1226	0.89
							K _v		114	228	343	448	551	660	776	886	980	1060	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.439	0.457	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _v	30	146	272	392	513	645	778	906	1027	1138	1238	0.89
							K _v		126	235	339	444	558	673	784	888	984	1071	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.438	0.458	---
		412.8	16.25	226	8.88	LN	C _v	30	148	294	442	579	712	853	1002	1136	1240	1337	0.89
							K _v		128	254	382	501	616	738	867	983	1073	1157	---
							X _T		0.442	0.436	0.434	0.433	0.432	0.432	0.432	0.438	0.458	0.480	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _v	27	159	291	429	578	714	847	995	1129	1231	1336	0.89
							K _v		138	252	371	500	618	733	861	977	1065	1156	---
							X _T		0.440	0.436	0.434	0.433	0.432	0.432	0.432	0.438	0.458	0.481	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _v	30	178	325	479	646	798	946	1112	1236	1343	1453	0.89
							K _v		154	281	414	559	690	818	962	1069	1162	1257	---
							X _T		0.440	0.436	0.434	0.433	0.432	0.432	0.432	0.457	0.481	0.509	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _v	33	199	393	591	787	972	1156	1344	1541	1726	1875	0.89
							K _v		172	340	511	680	841	1000	1162	1333	1493	1622	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.438	0.457	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _v	36	218	430	647	861	1065	1266	1472	1688	1904	2082	0.89
							K _v		188	372	560	745	921	1095	1273	1460	1647	1801	---
							X _T		0.440	0.435	0.433	0.433	0.432	0.432	0.432	0.432	0.431	0.444	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _v	33	265	495	752	989	1232	1485	1707	1906	2081	2242	0.89
							K _v		229	428	651	856	1066	1285	1477	1649	1800	1939	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.436	0.461	0.487	0.515	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _v	36	258	504	757	1010	1263	1510	1752	1988	2179	2365	0.89
							K _v		223	436	654	874	1092	1306	1516	1719	1885	2045	---
							X _T		0.438	0.435	0.433	0.432	0.432	0.432	0.432	0.434	0.455	0.477	---

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.



EUT-2, EUD, and EUT CL150, 300, and 600

Whisper Trim™ III--Level C3
Flow Up through the Port

Catalog 12
March 2012 - Page EU-8

EUT-2, EUD, and EUT Whisper Trim III Trim—Level C3 Flow Up																			Linear Characteristic
Valve Type	Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
EUD, EUT	16	374.7	14.75	203	8.00	LN	C _V	20	116	226	339	456	564	681	794	904	1023	1120	0.89
							K _V		100	195	293	394	488	589	687	782	885	969	---
							X _T		0.444	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.437	---
		374.7	14.75	226	8.88	LN	C _V	20	129	250	379	503	629	756	879	1009	1122	1225	0.89
							K _V		112	216	328	435	544	654	760	873	971	1060	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.437	0.457	---
EUT-2	16	412.8	16.25	203	8.00	LN	C _V	22	127	246	369	497	614	741	864	983	1113	1200	0.89
							K _V		109	213	319	430	531	641	747	851	963	1038	---
							X _T		0.444	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.450	---
		412.8	16.25	226	8.88	LN	C _V	22	141	272	413	548	685	823	958	1098	1203	1311	0.89
							K _V		122	236	357	474	593	712	828	950	1041	1134	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.451	0.473	---
EUD, EUT	16	374.7	14.75	251	9.88	LN-S	C _V	20	146	284	429	563	707	846	984	1122	1227	1326	0.89
							K _V		126	246	371	487	612	732	851	971	1061	1147	---
							X _T		0.441	0.436	0.434	0.433	0.432	0.432	0.432	0.437	0.457	0.479	---
EUT-2	16	412.8	16.25	251	9.88	LN-S	C _V	22	156	305	457	613	760	918	1067	1196	1312	1414	0.89
							K _V		135	264	396	530	657	794	923	1035	1135	1223	---
							X _T		0.441	0.436	0.434	0.433	0.432	0.432	0.432	0.449	0.473	0.498	---
EUD, EUT	20	463.6	18.25	276	10.88	SN	C _V	24	194	375	568	752	935	1127	1309	1495	1686	1826	0.89
							K _V		168	325	491	650	809	975	1132	1293	1458	1579	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.450	---
EUT-2	20	501.7	19.75	276	10.88	SN	C _V	26	213	412	623	825	1026	1237	1436	1641	1850	2030	0.89
							K _V		184	356	539	713	888	1070	1242	1419	1601	1756	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.439	---
EUD, EUT	20	463.6	18.25	353	13.88	LN	C _V	24	248	483	717	957	1199	1437	1671	1858	2037	2203	0.89
							K _V		215	418	620	828	1037	1243	1445	1607	1762	1905	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.454	0.480	0.508	---
EUT-2	20	501.7	19.75	327	12.88	LN	C _V	26	253	490	731	979	1221	1458	1701	1949	2141	2319	0.89
							K _V		219	424	632	846	1056	1261	1471	1686	1852	2006	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.451	0.472	---
1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																			

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2008, 2012 Fisher Controls International LLC. All rights reserved



EUT-2, EUD, and EUT Whisper Trim III Trim—Level D1 Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
	mm	Inches	mm	Inches			Min. ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
16	356	14.00	203	8.00	LN	C _v	26	119	220	322	431	543	653	754	855	963	1056	0.89
						K _v		103	190	279	373	470	565	652	740	833	913	---
						X _T		0.443	0.443	0.437	0.433	0.433	0.432	0.432	0.432	0.431	0.446	---
	356	14.00	226	8.88	LN	C _v	26	124	239	364	487	600	712	834	959	1057	1142	0.89
						K _v		107	207	315	421	519	616	721	830	914	988	---
						X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.447	0.466	---
	356	14.00	251	9.88	LN-S	C _v	26	141	265	404	540	663	796	936	1046	1144	1244	0.89
						K _v		122	229	349	467	573	689	810	905	990	1076	---
						X _T		0.441	0.436	0.434	0.433	0.432	0.432	0.432	0.444	0.466	0.492	---
20	432	17.00	276	10.88	LN	C _v	31	189	374	562	749	926	1101	1280	1462	1610	1745	0.89
						K _v		164	323	486	648	801	953	1107	1265	1393	1509	---
						X _T		0.440	0.435	0.433	0.433	0.432	0.432	0.432	0.435	0.456	0.478	---
	432	17.00	378	14.88	LN	C _v	31	260	506	755	1006	1258	1498	1691	1868	2028	2170	0.89
						K _v		225	438	653	870	1088	1295	1463	1616	1754	1877	---
						X _T		0.437	0.434	0.433	0.432	0.432	0.439	0.469	0.501	0.537	0.577	---
1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																		



EUT-2, EUD, and EUT CL150, 300, and 600

Whisper Trim™ III--Level D3
Flow Up through the Port

Catalog 12
March 2012 - Page EU-10

EUT-2, EUD, and EUT Whisper Trim III Trim—Level D3 Flow Up																		Linear Characteristic
Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
	mm	Inches	mm	Inches			Min. ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
16	356	14.00	203	8.00	LN	C _V	19	108	209	319	425	529	641	743	850	959	1034	0.89
						K _V		93	181	276	368	458	554	643	735	830	894	---
						X _T		0.444	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.442	---
	356	14.00	226	8.88	LN	C _V	19	117	236	352	474	588	711	824	948	1046	1139	0.89
						K _V		101	204	304	410	509	615	713	820	905	985	---
						X _T		0.443	0.436	0.434	0.433	0.433	0.432	0.432	0.432	0.444	0.465	---
	356	14.00	251	9.88	LN-S	C _V	19	130	264	391	528	656	789	922	1037	1143	1234	0.89
						K _V		112	228	338	457	567	682	798	897	989	1067	---
						X _T		0.442	0.436	0.434	0.433	0.432	0.432	0.432	0.442	0.466	0.490	---
20	432	17.00	276	10.88	LN	C _V	22	185	357	540	715	889	1072	1245	1422	1570	1699	0.89
						K _V		160	309	467	618	769	928	1077	1230	1358	1470	---
						X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.450	0.470	---
	432	17.00	378	14.88	LN	C _V	22	252	493	733	973	1218	1464	1652	1825	1982	2126	0.89
						K _V		218	427	634	842	1054	1266	1429	1578	1715	1839	---
						X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.462	0.493	0.526	0.563

1. Construction—LN = long-neck valve; LN-S = long neck valve with bonnet spacer; SN = short-neck valve.

2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2008, 2012 Fisher Controls International LLC. All rights reserved



EUT-2																			Linear Characteristic
Cavitrol III Trim—One Stage Flow Down																			
Valve Size, NPS	Port Diameter		Total Travel		Con- struc- tion ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L	
	mm	Inches	mm	Inches			Min ⁽²⁾	10	20	30	40	50	60	70	80	90	100		
16	374.7	14.75	203	8.00	SND	C _v	46	177	408	632	844	1040	1230	1390	1540	1670	1790	0.91	
						K _v	39.8	153	353	547	730	900	1064	1202	1332	1445	1548	---	
	374.7	14.75	276	10.88	LND	C _v	46	261	571	862	1130	1360	1560	1740	1890	2010	2120	0.91	
						K _v	39.8	226	494	746	977	1176	1349	1505	1635	1739	1834	--	
20	436.6	18.25	276	10.88	SND	C _v	56	323	710	1080	1430	1750	2030	2290	2520	2720	2890	0.91	
						K _v	48.4	279	614	934	1237	1514	1756	1981	2180	2353	2500	---	
	436.6	18.25	378	14.88	LND	C _v	56	467	985	1460	1890	2260	2570	2830	3040	3220	3370	0.91	
						K _v	48.4	404	852	1263	1635	1955	2223	2448	2630	2785	2915	---	
1. Construction—SND = short-neck valve, drilled windows; LND = long-neck valve, drilled windows. 2. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.																			



EUD, EUT, and EUT-2 CL150, 300, and 600

WhisperFlo™ Trim

Catalog 12
August 2012 - Page EU-12

WhisperFlo Level X																	Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Con-struction	Flow Coeffi-cient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches			Min	10	20	30	40	50	60	70	80	90	100
16	374.7	14.75	203	8	SN	C _v	60.2	170	358	541	720	890	1052	1205	1348	1481	1604
						X _T	0.534	0.711	0.697	0.688	0.684	0.684	0.687	0.694	0.703	0.715	0.729
20	463.6	18.25	203	8	SN	C _v	86.5	207	431	655	834	1087	1294	1493	1683	1865	2036
						X _T	0.534	0.713	0.701	0.692	0.686	0.683	0.682	0.683	0.687	0.693	0.700
20	463.6	18.25	276	10.875	SN	C _v	86.5	286	592	891	1179	1453	1712	1954	2179	2386	2576
						X _T	0.534	0.708	0.694	0.685	0.682	0.683	0.688	0.696	0.708	0.722	0.738
20	463.6	18.25	378	14.875	LN	C _v	86.5	399	813	1208	1577	1917	2223	2497	2740	2954	3141
						X _T	0.534	0.702	0.687	0.682	0.685	0.695	0.711	0.731	0.755	0.781	0.809
WhisperFlo Level Y																	Linear Characteristic
16	374.7	14.75	203	8	SN	C _v	53.4	124.3	258	392	525	654	779	901	1018	1130	1238
						X _T	0.534	0.616	0.607	0.600	0.596	0.594	0.593	0.594	0.598	0.602	0.608
20	463.6	18.25	203	8	SN	C _v	77.3	148	294	448	601	751	899	1045	1188	1267	1462
						X _T	0.534	0.578	0.572	0.567	0.563	0.560	0.558	0.557	0.557	0.558	0.560
20	463.6	18.25	276	10.875	SN	C _v	77.3	198	405	612	816	1016	1210	1397	1577	1750	1915
						X _T	0.534	0.576	0.568	0.562	0.559	0.557	0.557	0.559	0.562	0.567	0.574
20	463.6	18.25	378	14.875	LN	C _v	77.3	272	558	837	1108	1367	1614	1849	2063	2265	2452
						X _T	0.534	0.573	0.564	0.558	0.557	0.559	0.563	0.571	0.581	0.593	0.607
WhisperFlo Level Z																	Linear Characteristic
16	374.7	14.75	203	8	SN	C _v	48.1	91	179	273	366	458	548	638	725	811	895
						X _T	0.534	0.466	0.462	0.459	0.456	0.454	0.453	0.453	0.453	0.454	0.456
20	463.6	18.25	203	8	SN	C _v	71.8	113	214	323	434	544	653	761	868	974	1078
						X _T	0.534	0.454	0.450	0.448	0.445	0.443	0.442	0.441	0.440	0.440	0.441
20	463.6	18.25	276	10.875	SN	C _v	71.8	148	288	437	585	731	875	1016	1155	1290	1422
						X _T	0.534	0.453	0.448	0.445	0.443	0.441	0.440	0.440	0.441	0.442	0.445
20	463.6	18.25	378	14.875	LN	C _v	71.8	200	403	607	808	1005	1196	1381	1560	1730	1894
						X _T	0.534	0.451	0.446	0.446	0.441	0.440	0.441	0.444	0.448	0.453	0.459

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher, Cavitrol, and WhisperFlo are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2009, 2012 Fisher Controls International LLC. All rights reserved



Catalog 12March 2012 - Page EU-13

The EUT-C has flow coefficients identical to the NPS 12 through 20 CL150 - 600 EUD. Please refer to those coefficients. For additional EUT-C valve information, please refer to PS Sheet 51.1:Cryogenic (A).



This page intentionally left blank

Quick Opening																Quick Opening Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Coeffs. for 6 mm (0.25 in.) Travel ⁽²⁾	Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches		mm	Inches		10	20	30	40	50	60	70	80	90	100	
4 x 2	58.7	2.3125	29.8	29	1.125	C _V	13.8	26.5	42.7	61.8	78.1	93.3	105	114	119	124	0.82
						K _V	11.9	22.9	36.9	53.5	67.6	80.7	90.8	98.6	103	107	---
						X _T	0.571	0.651	0.662	0.648	0.687	0.708	0.714	0.709	0.713	0.693	---
6 x 4	111.1	4.375	49.3	51	2	C _V	40.8	85.3	140	196	242	277	306	326	340	340	0.88
						K _V	35.3	73.8	121	170	209	240	265	282	294	294	---
						X _T	0.577	0.594	0.612	0.656	0.732	0.779	0.793	0.791	0.804	0.818	---
8 x 4	111.1	4.375	52.7	51	2	C _V	43.2	88.7	147	202	252	294	328	354	371	379	0.89
						K _V	37.4	76.7	127	175	218	254	284	306	321	328	---
						X _T	0.629	0.650	0.631	0.677	0.726	0.797	0.809	0.817	0.815	0.817	---
8 x 6 10 x 6 ⁽⁴⁾	177.8	7	96.2	51	2	C _V	79.0	158	247	338	413	471	531	569	610	637	0.89
						K _V	68.3	137	214	292	357	407	459	492	528	551	---
						X _T	0.544	0.574	0.578	0.626	0.678	0.758	0.759	0.749	0.727	0.705	---
12 x 6	177.8	7	98.0	51	2	C _V	80.1	156	250	348	449	539	621	683	743	817	0.82
						K _V	69.3	135	216	301	388	466	537	591	643	707	---
						X _T	0.515	0.627	0.613	0.624	0.642	0.689	0.715	0.765	0.789	0.782	---
10 x 8	203.2	8	---	76	3	C _V	138	306	468	607	725	824	903	960	998	1040	0.88
						K _V	119	265	405	525	627	713	781	830	863	900	---
						X _T	0.665	0.632	0.651	0.685	0.708	0.722	0.741	0.761	0.791	0.787	---
12 x 8	203.2	8	---	76	3	C _V	149	315	481	640	780	898	1000	1100	1180	1260	0.79
						K _V	129	272	416	554	675	777	865	952	1021	1090	---
						X _T	0.687	0.735	0.727	0.745	0.754	0.784	0.744	0.754	0.711	0.636	---
Linear																Linear Characteristic	
4 x 2	58.7	2.3125	---	29	1.125	C _V	6.80	14.6	23.0	32.7	43.9	56.6	70.8	85.0	97.2	107	0.79
						K _V	5.88	12.6	19.9	28.3	38.0	49.0	61.2	73.5	84.1	92.6	---
						X _T	0.625	0.659	0.691	0.682	0.645	0.604	0.582	0.603	0.632	0.654	---
6 x 4	111.1	4.375	---	51	2	C _V	21.4	49.0	78.7	109	137	166	201	245	286	320	0.86
						K _V	18.5	42.4	68.1	94.3	119	144	174	212	247	277	---
						X _T	0.686	0.717	0.651	0.648	0.654	0.661	0.672	0.670	0.695	0.725	---
8 x 4	111.1	4.375	---	51	2	C _V	23.2	51.0	80.6	111	141	173	211	254	299	340	0.82
						K _V	20.1	44.1	69.7	96.0	122	150	183	220	259	294	---
						X _T	0.694	0.711	0.691	0.661	0.668	0.669	0.676	0.688	0.727	0.753	---
8 x 6 10 x 6 ⁽⁴⁾	177.8	7	---	51	2	C _V	44.0	108	170	234	293	354	405	474	552	617	0.88
						K _V	38.1	93.4	147.1	202	253	306	350	410	477	534	---
						X _T	0.796	0.726	0.758	0.742	0.772	0.767	0.801	0.748	0.702	0.656	---
12 x 6	177.8	7	---	51	2	C _V	51.7	111	176	249	319	391	458	540	632	729	0.81
						K _V	44.7	96.0	152	215	276	338	396	467	547	631	---
						X _T	0.716	0.710	0.691	0.656	0.639	0.639	0.661	0.649	0.639	0.633	---
10 x 8	203.2	8	---	76	3	C _V	95.9	212	336	459	586	696	798	876	928	975	0.91
						K _V	83.0	183	291	397	507	602	690	758	803	843	---
						X _T	0.683	0.617	0.610	0.641	0.657	0.694	0.715	0.748	0.795	0.843	---
12 x 8	203.2	8	---	76	3	C _V	104	223	348	490	638	781	907	999	1080	1160	0.80
						K _V	90.0	193	301	424	552	676	785	864	934	1003	---
						X _T	0.700	0.694	0.647	0.692	0.697	0.693	0.711	0.741	0.738	0.696	---
1. The first number indicates both body inlet and outlet sizes. The second number indicates effective trim size. 2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel. 3. At 100% travel. 4. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																	

1. The first number indicates both body inlet and outlet sizes. The second number indicates effective trim size.
2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.
3. At 100% travel.
4. NPS 10x6 has a valve outlet area identical to the NPS 8x6.

Notes: The coefficients shown on this page are also appropriate for the EWT.
The linear trim coefficients shown on this page for NPS 6 x 4 through 10 x 8 apply to EWT-C valves.



EWD

CL150, 300, and 600

Equal Percentage Cages
Flow Down through the Port

Catalog 12
June 2012 - Page EW-2

Equal Percentage (Flow Down)																Equal Percentage Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
4 x 2	58.7	2.3125	29	1.125	C _V	2.53	4.52	6.66	9.29	13.6	19.9	29.4	45.2	65.8	82.2	0.82
					K _V	2.19	3.91	5.76	8.04	11.8	17.2	25.4	39.1	56.9	71.1	---
					X _T	0.626	0.652	0.664	0.683	0.657	0.66	0.646	0.591	0.560	0.587	---
6 x 4	111.1	4.375	51	2	C _V	7.34	13.1	19.8	30.6	46.6	69.1	108	168	225	271	0.87
					K _V	6.35	11.3	17.1	26.5	40.3	59.8	93.4	145	195	234	---
					X _T	0.996	0.808	0.711	0.640	0.605	0.605	0.630	0.613	0.662	0.712	---
8 x 4	111.1	4.375	51	2	C _V	8.01	14.1	21.1	31.7	47.2	73.5	118	180	240	286	0.85
					K _V	6.93	12.2	18.3	27.4	40.8	63.6	102	156	208	247	---
					X _T	0.684	0.671	0.643	0.617	0.566	0.591	0.566	0.573	0.645	0.675	---
8 x 6 10 x 6 ⁽¹⁾	177.8	7	51	2	C _V	13.2	26.4	45.4	71.1	112	178	256	342	431	508	0.91
					K _V	11.4	22.8	39.3	61.5	96.9	154	221	296	373	439	---
					X _T	0.837	0.837	0.719	0.683	0.596	0.573	0.626	0.682	0.688	0.684	---
12 x 6	177.8	7	51	2	C _V	23.6	36.2	52.8	76.3	110	164	248	348	453	565	0.79
					K _V	20.4	31.3	45.7	66.0	95.2	142	215	301	392	489	---
					X _T	0.628	0.664	0.694	0.714	0.703	0.739	0.695	0.683	0.658	0.627	---
10 x 8	203.2	8	76	3	C _V	32.3	65.7	111	184	303	462	635	778	876	924	0.89
					K _V	27.9	56.8	96.0	159	262	400	549	673	758	799	---
					X _T	0.725	0.720	0.687	0.634	0.585	0.582	0.595	0.615	0.652	0.802	---
12 x 8	203.2	8	76	3	C _V	28.4	61.0	112	196	311	481	687	839	992	1090	0.81
					K _V	24.6	52.8	96.9	170	269	416	594	726	858	943	---
					X _T	0.666	0.665	0.667	0.664	0.659	0.667	0.664	0.662	0.663	0.663	---

1. NPS 10x6 has a valve outlet area identical to the NPS 8x6.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 1988, 2012 Fisher Controls International LLC. All rights reserved



Whisper Trim I (Flow Up)															Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
4 x 2	58.7	2.3125	29	1.125	C _v	14.8	28.9	40.8	52.9	65.1	77.2	89.0	100	111	118	---
					K _v	12.8	25.0	35.3	45.8	56.3	66.8	77.0	86.5	96.0	102	---
					X _T	0.320	0.323	0.323	0.322	0.323	0.321	0.322	0.325	0.324	0.322	---
6 x 4	111.1	4.375	51	2	C _v	30.9	69.9	110	149	187	223	253	281	307	325	---
					K _v	26.7	60.5	95.2	129	162	193	219	243	266	281	---
					X _T	0.668	0.476	0.382	0.351	0.349	0.358	0.367	0.382	0.401	0.416	---
8 x 4	111.1	4.375	51	2	C _v	36.2	77.6	116	155	193	231	266	298	326	345	---
					K _v	31.3	67.1	100	134	167	200	230	258	282	298	---
					X _T	0.447	0.403	0.356	0.333	0.331	0.329	0.334	0.341	0.350	0.368	---
8 x 6 10 x 6 ⁽⁴⁾	177.8	7	51	2	C _v	42.8	99.7	164	224	290	352	422	473	523	545	---
					K _v	37.0	86.2	142	194	251	304	365	409	452	471	---
					X _T	0.550	0.409	0.364	0.350	0.334	0.326	0.310	0.326	0.329	0.350	---
			102	4 ⁽³⁾	C _v	113	266	355	475	522	522	522	522	519	522	---
					K _v	97.7	230	307	411	452	452	452	452	449	452	---
					X _T	0.412	0.285	0.357	0.354	0.469	0.632	0.777	0.854	0.919	0.917	---
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
12 x 6	177.8	7	51	2	C _v	49.0	126	196	269	340	406	476	540	598	641	---
					K _v	42.4	109	170	233	294	351	412	467	517	554	---
					X _T	0.547	0.300	0.286	0.270	0.264	0.267	0.263	0.264	0.273	0.273	---
			102	4 ⁽³⁾	C _v	113	258	343	469	572	641	755	828	884	953	---
					K _v	97.7	223	297	406	495	554	653	716	765	824	---
					X _T	0.432	0.320	0.393	0.363	0.380	0.424	0.408	0.437	0.468	0.476	---
10 x 8	203.2	8	76	3	C _v	99.2	229	339	430	515	605	691	763	806	826	---
					K _v	85.8	198	293	372	515	523	598	660	697	714	---
					X _T	0.791	0.490	0.439	0.447	0.462	0.465	0.463	0.478	0.518	0.591	---
			102	4	C _v	146	300	433	551	664	755	824	857	866	903	---
					K _v	126	260	375	477	574	653	713	741	749	781	---
					X _T	0.596	0.465	0.441	0.451	0.459	0.488	0.535	0.616	0.720	0.761	---
12 x 8	203.2	8	76	3	C _v	147	268	358	445	537	624	702	772	842	900	---
					K _v	127	232	310	385	465	540	607	668	728	779	---
					X _T	0.256	0.272	0.390	0.422	0.406	0.411	0.439	0.473	0.480	0.508	---
			102	4	C _v	181	329	449	563	674	778	866	931	972	1000	---
					K _v	157	285	388	487	583	673	749	805	841	865	---
					X _T	0.329	0.350	0.408	0.425	0.431	0.452	0.494	0.540	0.583	0.644	---
1. The first number indicates both body inlet and outlet size. The second number indicates effective trim size. 2. At 100% travel. 3. Travel limited to 3.5 inches when optional multiple piston ring is used. Reduce printed capacities accordingly. 4. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																

Notes: The coefficients shown on this page are also appropriate for the EWT.

The coefficients shown on this page for NPS 6 x 4 through 10 x 8 also apply to EWT-C valves.



Whisper Trim III - Flow Up																Linear Characteristic ⁽¹⁾
Valve Size, NPS ⁽²⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										X _T ⁽⁴⁾
	mm	Inches	mm	Inches		Minimum ⁽³⁾	20	30	40	50	60	70	80	90	100	
A3 ΔP/P ₁ ≤ 0.6																
8 x 6 10 x 6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.00	97.6	159	215	270	326	383	427	457	460	0.710
					K _v	3.46	84	138	186	234	282	331	369	395	398	---
12 x 6	136.5	5.375	165	6.5	C _v	4.00	151	238	324	407	492	573	651	697	698	0.589
					K _v	3.46	131	206	280	352	426	496	563	603	604	---
B3 ΔP/P ₁ ≤ 0.75																
8 x 6 10 x 6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	72.3	108	143	178	213	248	280	314	347	0.563
					K _v	4.04	62.5	93.4	124	154	184	215	242	272	300	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	94.0	141	187	233	278	324	370	413	457	0.563
					K _v	4.04	81.3	122	162	202	240	280	320	357	395	---
C3 ΔP/P ₁ ≤ 0.85																
8 x 6 10 x 6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	50.0	74.7	99.3	124	149	173	197	221	245	0.563
					K _v	4.04	43.3	64.6	85.9	107	129	150	170	191	212	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	64.0	96.0	127	160	191	222	254	284	315	0.563
					K _v	4.04	55.4	83.0	110	138	165	192	220	246	272	---
D3 ΔP/P ₁ ≤ 0.99																
8 x 6 10 x 6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	12.7	31.4	55.0	79.7	104	128	152	177	201	0.563
					K _v	4.04	11.0	27.2	47.6	68.9	90.0	111	131	153	174	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	23.8	53.3	85.0	116	148	180	211	243	273	0.563
					K _v	4.04	20.6	46.1	73.5	100	128	156	183	210	236	---
1. Level D exhibits an equal percentage characteristic for the first 38 mm (1.5 inch) of travel, then linear characteristic. 2. The first number indicates the body inlet and outlet size. The second number indicates effective trim size. 3. Valves should not be required to throttle at less than the specified minimum coefficient for and extended period of time. Erosion damage to the valve seats may result. 4. This column lists X _T factors for cages at 100 % travel. 5. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																

Quick Opening - Flow Down															Quick Opening Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
8 x 6	177.8	7	51	2	C _V	83	166	259	355	434	495	558	597	641	670	0.89
					K _V	71.8	144	224	307	375	428	483	516	554	580	---
					X _T	0.501	0.569	0.607	0.633	0.688	0.772	0.787	0.811	0.798	0.809	---
12 x 8	203.2	8	76	3	C _V	149	315	481	640	780	898	1000	1100	1180	1260	0.79
					K _V	129	272	416	554	675	777	865	952	1021	1090	---
					X _T	0.687	0.735	0.727	0.745	0.754	0.784	0.744	0.754	0.711	0.636	---
Linear - Flow Down															Linear Characteristic	
8 x 6	177.8	7	51	2	C _V	46	112	177	243	305	368	421	493	574	644	0.89
					K _V	39.8	96.9	153	210	264	318	364	426	497	557	---
					X _T	0.884	0.746	0.747	0.743	0.755	0.756	0.783	0.788	0.759	0.729	---
12 x 8	203.2	8	76	3	C _V	104	223	348	490	638	781	907	999	1080	1160	0.80
					K _V	90.0	193	301	424	552	676	785	864	934	1003	---
					X _T	0.700	0.694	0.647	0.692	0.697	0.693	0.711	0.741	0.738	0.696	---
Equal Percentage - Flow Down															Equal Percentage Characteristic	
8 x 6	177.8	7	51	2	C _V	12.2	24.4	42.4	67.1	105	167	241	321	405	477	0.92
					K _V	10.6	21.1	36.7	58.0	90.8	144	208	278	350	413	---
					X _T	0.715	0.614	0.526	0.506	0.507	0.529	0.609	0.669	0.704	0.757	---
12 x 8	203.2	8	76	3	C _V	28.4	61.0	112	196	311	481	687	839	992	1090	0.81
					K _V	24.6	52.8	96.9	170	269	416	594	726	858	943	---
					X _T	0.666	0.665	0.667	0.664	0.659	0.666	0.664	0.662	0.663	0.663	---
Whisper Trim I - Flow Up															Linear Characteristic	
8 x 6	177.8	7	51	2	C _V	44.8	104	171	233	302	366	439	492	544	568	---
					K _V	38.8	90.0	148	202	261	317	380	426	471	491	---
					X _T	0.516	0.384	0.342	0.330	0.315	0.308	0.292	0.307	0.309	0.327	---
1. The first number indicates both body inlet and outlet size. The second number indicates effective trim size. 2. At 100% travel.																

Notes: The coefficients shown on this page are also appropriate for the EWT and EWT-1. EWD-1 and EWT-1 are available only in NPS 12 x 8 body size.



Whisper Trim III - Flow Up																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel											X _T at Max Travel
	mm	Inches	mm	Inches		Minimum ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
A1 & A3 ΔP/P ₁ ≤ 0.6																	
12 x 8	196.8	7.75	146	5.75	C _v	25	84	168	253	337	422	506	590	675	759	843	0.563
					K _v	22	73	145	219	292	365	438	511	584	657	729	---
B1 & B3 ΔP/P ₁ ≤ 0.75																	
12 x 8	196.8	7.75	146	5.75	C _v	21	55	111	177	227	277	326	422	443	498	554	0.563
					K _v	18	48	96	153	196	240	282	365	383	431	479	---
C1 & C3 ΔP/P ₁ ≤ 0.85																	
12 x 8	196.8	7.75	146	5.75	C _v	18	39	78	117	156	195	235	273	312	352	391	0.563
					K _v	16	34	68	101	135	169	203	236	270	304	338	---
D1 & D3 ΔP/P ₁ ≤ 0.99																	
12 x 8	171.5	6.75	146	5.75	C _v	16	33	67	100	133	167	201	233	266	301	332	0.563
					K _v	14	29	58	86	115	144	173	201	230	260	287	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Valve should not be required to throttle at less than the specified minimum coefficient for an extended period of time or erosion damage to the valve seat may result.																	

Notes: The coefficients shown on this page are also appropriate for the EWT-1.

Linear Cast-Window Cage																	Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con-Struc-tion ⁽²⁾	Flow Coeffi-cient	Valve Opening—Percent of Total Travel											F _L
	mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
20 x 16	374.7	14.75	102	4.00	SNC	C _V	46	269	524	814	1100	1390	1730	2070	2380	2670	2960	0.88
						K _V	39.8	233	453	704	952	1202	1496	1791	2059	2310	2560	---
						X _T	0.391	0.989	0.901	0.804	0.750	0.742	0.742	0.748	0.755	0.759	0.767	---
20 x 16	374.7	14.75	127	5.00	SNC	C _V	46	321	670	1030	1390	1810	2230	2590	2960	3300	3580	0.88
						K _V	39.8	278	580	891	1202	1566	1929	2240	2560	2855	3097	---
						X _T	0.391	0.994	0.843	0.759	0.742	0.738	0.751	0.761	0.772	0.759	0.750	---
24 x 16	374.7	14.75	102	4.00	SNC	C _V	46	351	604	590	1183	1470	1770	2090	2450	2820	3190	0.88
						K _V	39.8	304	522	510	1023	1272	1531	1808	2119	2439	2759	---
						X _T	0.391	0.994	0.914	0.808	0.751	0.738	0.742	0.744	0.758	0.766	0.757	---
24 x 16	374.7	14.75	140	5.50	SNC	C _V	46	418	817	1220	1600	2040	2540	3050	3530	3850	4060	0.88
						K _V	39.8	362	707	1055	1384	1765	2197	2638	3053	3330	3512	---
						X _T	0.391	0.986	0.820	0.744	0.739	0.744	0.759	0.769	0.759	0.746	0.765	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SNC = short-neck, cast windows. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																		



Linear Drilled-Window Cage																		Linear Characteristic	
Valve Type	Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con-Struc-tion ⁽²⁾	Flow Coeffi-cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
EWD, EWT	20 x 16	374.7	14.75	276	10.88	LND	C _V	46	262	550	874	1200	1560	1850	2190	2470	2760	3040	0.89
							K _V	39.8	227	476	756	1038	1349	1600	1894	2137	2387	2630	---
							X _T	0.391	0.985	0.894	0.791	0.740	0.738	0.743	0.745	0.758	0.762	0.760	---
	20 x 16	374.7	14.75	378	14.88	LN-SD	C _V	46	330	742	1160	1570	1970	2370	2740	3110	3430	3660	0.89
							K _V	39.8	285	642	1003	1358	1704	2050	2370	2690	2967	3166	---
							X _T	0.391	0.985	0.815	0.739	0.739	0.740	0.754	0.764	0.768	0.752	0.753	---
EWT-2	20 x 16	412.8	16.25	276	10.88	LND	C _V	52	322	679	1080	1480	1880	2210	2570	2880	3180	3480	0.89
							K _V	45.0	279	587	934	1280	1626	1912	2223	2491	2751	3010	---
							X _T	0.391	0.988	0.888	0.786	0.742	0.738	0.759	0.744	0.754	0.762	0.768	---
	20 x 16	412.8	16.25	378	14.88	LN-SD	C _V	52	390	868	1350	1850	2340	2810	3240	3670	4060	4370	0.89
							K _V	45.0	337	751	1168	1600	2024	2431	2803	3175	3512	3780	---
							X _T	0.391	0.990	0.823	0.751	0.736	0.742	0.754	0.760	0.760	0.754	0.746	---
EWD, EWT	24 x 16	374.7	14.75	378	14.88	LND	C _V	46	328	701	1140	1610	2060	2480	2860	3140	3340	3490	0.89
							K _V	39.8	284	606	986	1393	1782	2145	2474	2716	2889	3019	---
							X _T	0.391	0.997	0.934	0.828	0.767	0.745	0.734	0.743	0.753	0.767	0.764	---
	24 x 16	374.7	14.75	429	16.88	LN-SD	C _V	46	356	764	1240	1750	2210	2620	3030	3300	3500	3670	0.89
							K _V	39.8	308	661	1073	1514	1912	2266	2621	2855	3028	3175	---
							X _T	0.391	0.994	0.919	0.816	0.757	0.743	0.741	0.751	0.759	0.759	0.748	---
EWT-2	24 x 16	412.8	16.25	378	14.88	LND	C _V	52	363	765	1240	1750	2280	2740	3260	3670	3960	4150	0.89
							K _V	45.0	314	662	1073	1514	1972	2370	2820	3175	3425	3590	---
							X _T	0.391	0.997	0.955	0.853	0.787	0.745	0.739	0.738	0.748	0.759	0.763	---
	24 x 16	412.8	16.25	429	16.88	LN-SD	C _V	52	393	832	1350	1900	2440	2940	3480	3850	4110	4310	0.89
							K _V	45.0	340	720	1168	1644	2111	2543	3010	3330	3555	3728	---
							X _T	0.391	0.997	0.942	0.834	0.775	0.746	0.738	0.743	0.757	0.767	0.757	---
EWD, EWT	24 x 20	463.6	18.25	378	14.88	LND	C _V	56	457	995	1560	2130	2640	3310	3451	3650	3885	4115	0.89
							K _V	48.4	395	861	1349	1842	2284	2863	2985	3157	3361	3559	---
							X _T	0.391	0.991	.0850	0.763	0.738	0.739	0.743	0.753	0.757	0.769	0.766	---
	24 x 20	463.6	18.25	429	16.88	LN-SD	C _V	56	490	1080	1680	2300	2920	3420	3637	3903	4160	4357	0.89
							K _V	48.4	424	934	1453	1990	2526	2958	3146	3376	3598	3769	---
							X _T	0.391	0.990	0.832	0.753	0.735	0.733	0.748	0.755	0.767	0.766	0.754	---
EWT-2	24 x 20	501.7	19.75	378	14.88	LND	C _V	60	490	1163	1898	2561	3152	3672	4119	4494	4797	5028	0.89
							K _V	51.9	434	1006	1642	2216	2727	3176	3563	3887	4149	4349	---
							X _T	0.391	0.992	0.873	0.775	0.743	0.736	0.735	0.747	0.758	0.760	0.768	---
	24 x 20	501.7	19.75	429	16.88	LN-SD	C _V	60	591	1320	2050	2790	3470	4250	4530	4810	5010	5210	0.89
							K _V	51.9	511	1142	1773	2413	3002	3676	3918	4161	4334	4507	---
							X _T	0.391	0.988	0.816	0.741	0.735	0.747	0.748	0.765	0.770	0.758	0.749	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—LND - long neck, drilled windows; LN-SD = long neck with bonnet spacer, drilled windows. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

Equal Percentage Cast-Window Cage																	Equal Percentage Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel										FL	
	mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90		100
20 x 16	374.7	14.75	102	4.00	SNC	C _V	23	29.8	61.3	99.1	152	233	355	544	818	1180	1630	0.88
						K _V	19.9	25.8	53.0	85.7	131	202	307	471	708	1021	1410	---
						X _T	0.391	0.997	0.990	0.993	0.990	0.987	0.986	0.896	0.802	0.744	0.735	---
20 x 16	374.7	14.75	127	5.00	SNC	C _V	23	37.2	77.4	132	233	388	652	1070	1630	2080	2460	0.88
						K _V	19.9	32.2	67.0	114	202	336	564	926	1410	1799	2128	---
						X _T	0.391	0.989	0.990	0.989	0.987	0.959	0.847	0.751	0.735	0.747	0.755	---
20 x 16	374.7	14.75	140	5.50	SNC	C _V	23	41.2	88.2	162	293	517	900	1470	2000	2420	2830	0.88
						K _V	19.9	35.6	76.3	140	253	447	779	1272	1730	2093	2448	---
						X _T	0.391	0.990	0.990	0.991	0.987	0.907	0.785	0.741	0.742	0.757	0.762	---
24 x 16	374.7	14.75	102	4.00	SNC	C _V	23	38.9	79.8	128	195	296	444	646	922	1290	1700	0.88
						K _V	19.9	33.6	69.0	111	169	256	384	559	798	1116	1471	---
						X _T	0.391	0.992	0.992	0.996	0.995	0.993	0.982	0.899	0.801	0.744	0.735	---
24 x 16	374.7	14.75	127	5.00	SNC	C _V	23	48.6	100	170	296	480	753	1180	1700	2130	2580	0.88
						K _V	19.9	42.0	86.5	147	256	415	651	1021	1471	1842	2232	---
						X _T	0.391	0.986	0.990	0.991	0.993	0.969	0.852	0.751	0.735	0.742	0.757	---
24 x 16	374.7	14.75	140	5.50	SNC	C _V	23	53.8	114	208	371	619	1010	1560	2030	2530	3040	0.88
						K _V	19.9	46.5	98.6	180	321	535	874	1349	1756	2188	2630	---
						X _T	0.391	0.989	0.990	0.993	0.995	0.908	0.781	0.732	0.745	0.758	0.774	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SNC = short-neck, cast windows. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																		



EWT-2, EWD, and EWT NPS 16 and Larger Sizes CL150, 300, and 600

Equal Percentage Drilled-Window Cage
Flow Down through the Port

Catalog 12

March 2012 - Page EW-10

Equal Percentage Drilled-Window Cage																	Equal Percentage Characteristic		
Valve Type	Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L	
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90		100
EWD, EWT	20 x 16	374.7	14.75	276	10.88	LND	C _V	23	42.8	93.5	170	278	445	750	1220	1810	2290	2700	0.89
							K _V	19.9	37.0	80.9	147	240	385	649	1055	1566	1981	2336	---
							X _T	0.391	0.986	0.995	0.991	0.996	0.934	0.816	0.741	0.743	0.751	0.764	---
	20 x 16	374.7	14.75	378	14.88	LN-SD	C _V	23	55.7	123	213	340	584	974	1580	2210	2750	3260	0.89
							K _V	19.9	48.2	106	184	294	505	843	1367	1912	2379	2820	---
							X _T	0.391	0.993	0.995	0.995	0.985	0.879	0.771	0.735	0.751	0.762	0.764	---
EWT-2	20 x 16	412.8	16.25	276	10.88	LND	C _V	25	48.1	105	189	318	500	841	1370	2070	2640	3100	0.89
							K _V	21.6	41.6	90.8	163	275	433	727	1185	1791	2284	2682	---
							X _T	0.391	0.996	0.990	0.995	0.997	0.951	0.833	0.748	0.739	0.744	0.759	---
	20 x 16	412.8	16.25	378	14.88	LN-SD	C _V	25	65.9	146	253	403	691	1150	1880	2640	3280	3890	0.89
							K _V	21.6	57.0	126	219	349	598	995	1626	2284	2837	3365	---
							X _T	0.391	0.995	0.990	0.996	0.985	0.885	0.783	0.736	0.746	0.737	0.754	---
EWD, EWT	24 x 16	374.7	14.75	378	14.88	LND	C _V	23	42.4	88.1	150	265	438	732	1250	2000	2650	3110	0.89
							K _V	19.9	36.7	76.2	130	229	379	633	1081	1730	2292	2690	---
							X _T	0.391	0.993	0.998	0.997	0.995	0.998	0.928	0.814	0.746	0.755	0.764	---
	24 x 16	374.7	14.75	429	16.88	LN-SD	C _V	23	46.8	97.4	166	293	484	820	1400	2210	2860	3270	0.89
							K _V	19.9	40.5	84.3	144	253	419	709	1211	1912	2474	2829	---
							X _T	0.391	0.998	0.992	0.991	0.997	0.994	0.905	0.797	0.739	0.743	0.760	---
EWT-2	24 x 16	412.8	16.25	378	14.88	LND	C _V	25	49.6	103	176	311	513	853	1460	2350	3120	3700	0.89
							K _V	21.6	42.9	89.1	152	269	444	738	1263	2033	2699	3201	---
							X _T	0.391	0.996	0.995	0.991	0.994	0.988	0.935	0.814	0.743	0.735	0.748	---
	24 x 16	412.8	16.25	429	16.88	LN-SD	C _V	25	53.1	110	188	332	549	921	1580	2510	3290	3830	0.89
							K _V	21.6	45.9	95.2	163	287	475	797	1367	2171	2846	3313	---
							X _T	0.391	0.996	0.995	0.995	0.988	0.995	0.918	0.802	0.742	0.737	0.754	---
EWD, EWT	24 x 20	463.6	18.25	378	14.88	LND	C _V	28	200	485	863	1505	2293	2900	3371	3610	3834	3839	0.89
							K _V	24.2	173	420	746	1302	1983	2509	2916	3123	3316	3321	---
							X _T	0.391	0.992	0.987	0.996	0.991	0.918	0.801	0.739	0.742	0.759	0.765	---
	24 x 20	463.6	18.25	429	16.88	LN-SD	C _V	28	227	550	979	1707	2601	3290	3824	4095	4349	4355	0.89
							K _V	24.2	196	476	847	1477	2280	2846	3308	3543	3762	3767	---
							X _T	0.391	0.994	0.994	0.984	0.986	0.889	0.776	0.735	0.742	0.761	0.762	---
EWT-2	24 x 20	501.7	19.75	378	14.88	LND	C _V	30	285	415	750	1523	2530	3174	3708	3963	4251	4608	0.89
							K _V	25.9	247	359	649	1317	2188	2746	3207	3428	3677	3986	---
							X _T	0.391	0.991	0.997	0.987	0.996	0.939	0.824	0.743	0.738	0.757	0.759	---
	24 x 20	501.7	19.75	429	16.88	LN-SD	C _V	30	310	500	924	1860	2780	3501	3948	4276	4684	5034	0.89
							K _V	25.9	268	433	799	1609	2405	3028	3415	3699	4052	4354	---
							X _T	0.391	0.992	0.991	0.997	0.985	0.882	0.776	0.735	0.748	0.758	0.763	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—LND - long neck, drilled windows; LN-SD = long neck with bonnet spacer, drilled windows. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

2. Construction—LND = long neck, drilled windows; LN-SD = long neck with bonnet spacer, drilled windows.

3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 1994, 2012 Fisher Controls International LLC. All rights reserved



Catalog 12

March 2012 - Page EW-11

EWT-2, EWD, and EWT Whisper Trim III—Level A1																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel									F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	38	320	663	1001	1341	1685	1977	2211	2417	0.89
							K _v		277	574	865	1160	1457	1710	1912	2090	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.451	0.493	0.541	---
		374.7	14.75	276	10.88	LN	C _v	38	443	907	1372	1836	2171	2449	2675	2846	0.89
							K _v		383	785	1186	1588	1878	2119	2314	2462	---
							X _T		0.434	0.433	0.432	0.432	0.484	0.549	0.580	0.607	---
		374.7	14.75	378	14.88	LN-S	C _v	38	617	1247	1876	2309	2642	2878	3011	3046	0.89
							K _v		534	1078	1622	1997	2286	2489	2605	2635	---
							X _T		0.434	0.432	0.436	0.513	0.576	0.613	0.660	0.722	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	41	353	732	1104	1480	1859	2231	2508	2757	0.89
							K _v		305	633	955	1280	1608	1930	2170	2385	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.466	0.506	0.550	---
		412.8	16.25	276	10.88	LN	C _v	41	489	1001	1514	2026	2460	2797	3080	3309	0.89
							K _v		423	866	1309	1752	2128	2420	2664	2863	---
							X _T		0.434	0.433	0.432	0.432	0.459	0.513	0.565	0.587	---
		412.8	16.25	378	14.88	LN-S	C _v	41	681	1376	2079	2626	3038	3353	3564	3678	0.89
							K _v		589	1190	1798	2272	2628	2900	3083	3181	---
							X _T		0.434	0.432	0.432	0.483	0.561	0.592	0.629	0.676	---
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	38	335	676	1019	1356	1698	1982	2219	2433	0.89
							K _v		290	585	881	1173	1469	1714	1919	2105	---
							X _T		0.435	0.433	0.432	0.432	0.432	0.457	0.495	0.539	---
		374.7	14.75	276	10.88	LN	C _v	38	461	924	1387	1838	2176	2466	2707	2901	0.89
							K _v		399	799	1200	1590	1882	2133	2342	2509	---
							X _T		0.434	0.433	0.432	0.438	0.487	0.546	0.571	0.592	---
		374.7	14.75	378	14.88	LN	C _v	38	628	1264	1877	2319	2676	2938	3110	3191	0.89
							K _v		543	1093	1624	2006	2315	2541	2690	2760	---
							X _T		0.433	0.432	0.442	0.513	0.568	0.597	0.633	0.679	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	41	353	732	1104	1480	1859	2218	2501	2759	0.89
							K _v		305	633	955	1280	1608	1919	2163	2387	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.436	0.469	0.505	---
		412.8	16.25	276	10.88	LN	C _v	41	489	1001	1513	2025	2450	2799	3099	3350	0.89
							K _v		423	866	1309	1752	2119	2421	2681	2898	---
							X _T		0.434	0.433	0.432	0.432	0.462	0.511	0.558	0.576	---
		412.8	16.25	403	15.88	LN	C _v	41	726	1474	2208	2746	3181	3512	3737	3858	0.89
							K _v		628	1275	1910	2375	2752	3038	3233	3337	---
							X _T		0.433	0.432	0.435	0.503	0.563	0.590	0.624	0.665	---



EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600
Whisper Trim™ III--Level A1
Flow Up through the Port

Catalog 12
March 2012 - Page EW-12

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel												F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100		
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _V	43	671	1358	2028	2614	3059	3369	3552	3708	3915	4187	0.89	
							K _V		580	1174	1754	2261	2646	2914	3073	3207	3386	3622	---	
							X _T		0.529	0.528	0.528	0.528	0.552	0.615	0.689	0.736	0.766	0.801	---	
		436.6	18.25	429	16.88	LN-S	C _V	43	761	1544	2278	2873	3275	3513	3688	3917	4224	4385	0.89	
							K _V		658	1335	1970	2485	2833	3039	3190	3388	3654	3793	---	
							X _T		0.529	0.528	0.528	0.528	0.593	0.674	0.735	0.769	0.809	0.858	---	
	EWT-2	501.7	19.75	378	14.88	LN	C _V	46	727	1478	2197	2879	3404	3841	4020	4245	4416	4657	0.89	
							K _V		629	1278	1900	2490	2944	3322	3477	3672	3820	4028	---	
							X _T		0.529	0.528	0.528	0.528	0.531	0.586	0.649	0.721	0.746	0.775	---	
		501.7	19.75	429	16.88	LN-S	C _V	46	825	1675	2488	3180	3687	4008	4213	4417	4706	5038	0.89	
							K _V		714	1449	2152	2751	3190	3467	3645	3821	4071	4358	---	
							X _T		0.529	0.528	0.528	0.528	0.567	0.636	0.719	0.748	0.781	0.821	---	
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																				

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

**EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600**

Whisper Trim™ III -- Level A3
Flow Up through the Port

Catalog 12

March 2012 - Page EW-13

EWT-2, EWD, and EWT Whisper Trim III—Level A3																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel									F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	25	290	593	892	1198	1495	1800	2032	2236	0.89
							K _v		251	513	772	1036	1293	1557	1758	1934	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.432	0.460	0.498	---
		374.7	14.75	276	10.88	LN	C _v	25	400	807	1223	1629	1994	2267	2503	2694	0.89
							K _v		346	698	1058	1409	1725	1961	2165	2330	---
							X _T		0.435	0.433	0.432	0.432	0.454	0.504	0.562	0.582	---
		374.7	14.75	378	14.88	LN-S	C _v	25	549	1114	1677	2128	2469	2732	2915	3018	0.89
							K _v		475	964	1451	1840	2135	2363	2521	2611	---
							X _T		0.434	0.432	0.432	0.476	0.554	0.587	0.622	0.666	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	28	317	651	979	1315	1642	1978	2291	2531	0.89
							K _v		274	563	847	1138	1420	1711	1981	2189	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.432	0.438	0.469	---
		412.8	16.25	276	10.88	LN	C _v	28	438	886	1343	1790	2245	2569	2857	3099	0.89
							K _v		379	767	1161	1548	1942	2222	2472	2680	---
							X _T		0.435	0.433	0.432	0.432	0.432	0.475	0.525	0.566	---
		412.8	16.25	378	14.88	LN-S	C _v	28	601	1223	1843	2403	2814	3148	3402	3576	0.89
							K _v		520	1058	1594	2079	2434	2723	2943	3093	---
							X _T		0.434	0.432	0.432	0.451	0.516	0.570	0.599	0.632	---
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	18	163	451	735	1025	1307	1597	1861	2075	0.89
							K _v		141	390	636	887	1131	1381	1610	1795	---
							X _T		0.440	0.434	0.433	0.432	0.432	0.432	0.441	0.471	---
		374.7	14.75	276	10.88	LN	C _v	19	281	688	1103	1509	1895	2188	2449	2666	0.89
							K _v		243	595	954	1305	1639	1893	2118	2306	---
							X _T		0.437	0.433	0.432	0.432	0.445	0.489	0.542	0.567	---
		374.7	14.75	378	14.88	LN	C _v	19	430	994	1558	2038	2410	2711	2939	3095	0.89
							K _v		372	860	1348	1763	2085	2345	2542	2677	---
							X _T		0.435	0.433	0.432	0.465	0.533	0.571	0.597	0.628	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	28	304	635	970	1297	1634	1961	2269	2515	0.89
							K _v		263	549	839	1122	1413	1696	1963	2175	---
							X _T		0.436	0.433	0.433	0.432	0.432	0.432	0.442	0.471	---
		412.8	16.25	276	10.88	LN	C _v	28	421	877	1324	1781	2216	2557	2852	3114	0.89
							K _v		364	759	1145	1541	1917	2212	2467	2694	---
							X _T		0.435	0.433	0.432	0.432	0.436	0.476	0.520	0.559	---
		412.8	16.25	403	15.88	LN	C _v	28	620	1274	1924	2476	2908	3261	3533	3727	0.89
							K _v		536	1102	1664	2142	2515	2821	3056	3224	---
							X _T		0.434	0.432	0.432	0.465	0.530	0.569	0.593	0.622	---



EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600
Whisper Trim™ III--Level A3
Flow Up through the Port

Catalog 12
March 2012 - Page EW-14

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _V	29	579	1177	1772	2323	2785	3135	3376	3537	3670	3830	0.89
							K _V		501	1018	1532	2010	2409	2711	2920	3060	3175	3313	---
							X _T		0.529	0.528	0.528	0.528	0.528	0.564	0.621	0.686	0.732	0.756	---
		436.6	18.25	429	16.88	LN-S	C _V	29	662	1343	2000	2581	3032	3337	3528	3681	3873	4134	0.89
							K _V		573	1162	1730	2233	2623	2886	3052	3184	3350	3576	---
							X _T		0.529	0.528	0.528	0.528	0.548	0.609	0.682	0.733	0.762	0.796	---
	EWT-2	501.7	19.75	378	14.88	LN	C _V	31	628	1275	1923	2537	3072	3502	3820	4037	4192	4338	0.89
							K _V		543	1103	1663	2194	2658	3029	3304	3492	3626	3753	---
							X _T		0.529	0.528	0.528	0.528	0.528	0.541	0.590	0.646	0.709	0.737	---
		501.7	19.75	429	16.88	LN-S	C _V	31	718	1455	2175	2833	3373	3767	4026	4203	4374	4604	0.89
							K _V		621	1258	1881	2450	2918	3258	3482	3636	3784	3982	---
							X _T		0.529	0.528	0.528	0.528	0.528	0.580	0.642	0.714	0.742	0.770	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

**EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600**

Whisper Trim™ III -- Level B1
Flow Up through the Port

Catalog 12

March 2012 - Page EW-15

EWT-2, EWD, and EWT Whisper Trim III—Level B1																			Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L	
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100		
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	31	196	374	554	746	933	1111	1290	1480	1669	1827	0.89	
							K _V		170	324	479	645	807	961	1116	1280	1444	1581	---	
							X _T		0.438	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---	
		374.7	14.75	276	10.88	LN	C _V	31	256	515	756	1016	1256	1517	1757	1974	2141	2307	0.89	
							K _V		221	445	654	879	1087	1313	1520	1707	1852	1995	---	
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.451	0.480	0.514	---	
		374.7	14.75	378	14.88	LN-S	C _V	31	357	698	1037	1377	1718	2009	2243	2446	2617	2758	0.89	
							K _V		309	603	897	1191	1486	1738	1941	2116	2263	2386	---	
							X _T		0.435	0.433	0.432	0.432	0.432	0.456	0.500	0.549	0.573	0.592	---	
	EWT-2	412.8	16.25	203	8.00	SN	C _V	34	214	408	605	814	1018	1212	1407	1614	1821	1993	0.89	
							K _V		185	353	523	704	880	1049	1217	1396	1575	1724	---	
							X _T		0.438	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---	
		412.8	16.25	276	10.88	LN	C _V	34	279	562	825	1109	1370	1655	1916	2201	2405	2603	0.89	
							K _V		241	486	713	959	1185	1432	1658	1904	2081	2251	---	
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.452	0.480	---	
		412.8	16.25	378	14.88	LN-S	C _V	34	390	761	1131	1502	1874	2249	2527	2772	2986	3170	0.89	
							K _V		337	658	979	1299	1621	1946	2186	2398	2583	2742	---	
							X _T		0.435	0.433	0.432	0.432	0.432	0.433	0.469	0.509	0.553	0.573	---	
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	31	196	374	554	746	933	1111	1290	1480	1669	1818	0.89	
							K _V		170	324	479	645	807	961	1116	1280	1444	1573	---	
							X _T		0.438	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.436	---	
		374.7	14.75	276	10.88	LN	C _V	31	255	515	755	1016	1255	1516	1756	1964	2137	2290	0.89	
							K _V		221	445	653	879	1086	1311	1519	1699	1849	1981	---	
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.455	0.481	0.509	---	
		374.7	14.75	378	14.88	LN	C _V	31	357	697	1036	1376	1718	2001	2243	2456	2639	2789	0.89	
							K _V		309	603	896	1190	1486	1731	1940	2124	2283	2412	---	
							X _T		0.435	0.433	0.432	0.432	0.432	0.460	0.500	0.544	0.565	0.579	---	
	EWT-2	412.8	16.25	203	8.00	SN	C _V	34	214	408	605	814	1018	1212	1407	1614	1821	1993	0.89	
							K _V		185	353	523	704	881	1048	1217	1396	1575	1724	---	
							X _T		0.438	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---	
		412.8	16.25	276	10.88	LN	C _V	34	279	561	824	1108	1369	1654	1915	2193	2394	2576	0.89	
							K _V		241	485	713	958	1184	1431	1656	1897	2071	2228	---	
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.434	0.456	0.479	---	
		412.8	16.25	403	15.88	LN	C _V	34	404	814	1201	1612	2000	2355	2638	2896	3123	3311	0.89	
							K _V		349	704	1039	1394	1730	2037	2282	2505	2701	2864	---	
							X _T		0.435	0.433	0.432	0.432	0.432	0.451	0.487	0.528	0.560	0.573	---	



EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600
Whisper Trim™ III--Level B1
Flow Up through the Port

Catalog 12
March 2012 - Page EW-16

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel												F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100		
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _v	36	385	754	1121	1486	1844	2191	2508	2783	3011	3196	0.89	
							K _v		333	652	969	1285	1595	1895	2169	2407	2605	2765	---	
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.545	0.576	---	
		436.6	18.25	429	16.88	LN-S	C _v	36	431	851	1269	1682	2078	2441	2759	3022	3229	3384	0.89	
							K _v		373	736	1098	1455	1797	2112	2387	2614	2793	2927	---	
							X _T		0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.546	0.583	0.623	---	
	EWT-2	501.7	19.75	378	14.88	LN	C _v	38	414	811	1205	1598	1988	2371	2730	3051	3330	3565	0.89	
							K _v		358	702	1042	1382	1720	2051	2361	2639	2880	3084	---	
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.549	---	
		501.7	19.75	429	16.88	LN-S	C _v	38	464	915	1365	1811	2245	2654	3023	3344	3608	3817	0.89	
							K _v		401	792	1181	1567	1942	2295	2615	2892	3121	3302	---	
							X _T		0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.555	0.590	---	

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer.

3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

**EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600**

Whisper Trim™ III -- Level B3
Flow Up through the Port

Catalog 12

March 2012 - Page EW-17

EWT-2, EWD, and EWT Whisper Trim III—Level B3																		Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	21	178	349	528	701	878	1052	1228	1404	1578	1756	0.89
							K _V		154	302	457	606	760	910	1062	1215	1365	1519	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---
		374.7	14.75	276	10.88	LN	C _V	21	236	475	714	954	1194	1434	1674	1896	2070	2229	0.89
							K _V		204	411	618	825	1032	1240	1448	1640	1791	1928	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.439	0.467	0.497	---
		374.7	14.75	378	14.88	LN-S	C _V	21	326	657	982	1307	1639	1936	2163	2367	2545	2689	0.89
							K _V		282	569	849	1130	1418	1675	1871	2047	2201	2326	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.445	0.483	0.528	0.566	0.582	---
	EWT-2	412.8	16.25	203	8.00	SN	C _V	23	194	382	578	767	962	1152	1345	1537	1729	1922	0.89
							K _V		168	330	500	663	832	996	1164	1329	1495	1663	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		412.8	16.25	276	10.88	LN	C _V	23	258	520	782	1044	1307	1570	1833	2096	2328	2517	0.89
							K _V		223	450	676	903	1131	1358	1586	1813	2014	2177	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.443	0.468	---
		412.8	16.25	378	14.88	LN-S	C _V	23	357	719	1074	1431	1795	2153	2438	2683	2902	3086	0.89
							K _V		309	622	929	1238	1553	1862	2109	2321	2510	2670	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.432	0.456	0.493	0.534	0.566	---
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	21	178	349	528	701	878	1052	1228	1404	1578	1744	0.89
							K _V		154	302	457	606	759	910	1062	1214	1365	1509	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---
		374.7	14.75	276	10.88	LN	C _V	21	236	475	714	953	1193	1433	1673	1886	2064	2217	0.89
							K _V		204	411	618	824	1032	1240	1447	1631	1785	1918	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.444	0.470	0.495	---
		374.7	14.75	378	14.88	LN	C _V	21	326	657	981	1306	1639	1926	2159	2373	2561	2711	0.89
							K _V		282	568	849	1130	1418	1666	1868	2053	2215	2345	---
							X _T		0.436	0.433	0.432	0.432	0.432	0.449	0.485	0.525	0.559	0.571	---
	EWT-2	412.8	16.25	203	8.00	SN	C _V	23	194	382	578	767	962	1152	1345	1537	1729	1910	0.89
							K _V		168	330	500	663	832	996	1163	1330	1496	1652	---
							X _T		0.439	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	0.431	---
		412.8	16.25	276	10.88	LN	C _V	23	258	520	782	1044	1307	1570	1833	2096	2316	2496	0.89
							K _V		223	450	676	903	1131	1358	1586	1813	2003	2159	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.447	0.469	---
		412.8	16.25	403	15.88	LN	C _V	23	379	762	1147	1532	1916	2271	2553	2807	3034	3222	0.89
							K _V		328	659	992	1325	1657	1964	2208	2428	2624	2787	---
							X _T		0.435	0.433	0.432	0.432	0.432	0.442	0.476	0.513	0.550	0.566	---



**EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600**
Whisper Trim™ III--Level B3
Flow Up through the Port

Catalog 12
March 2012 - Page EW-18

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _V	25	354	716	1070	1423	1778	2110	2416	2695	2933	3127	0.89
							K _V		307	620	925	1231	1538	1825	2090	2331	2537	2705	---
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.534	0.562	---	
		436.6	18.25	429	16.88	LN-S	C _V	25	402	809	1215	1618	2005	2363	2680	2948	3163	3329	0.89
							K _V		348	700	1051	1399	1734	2044	2318	2550	2736	2879	---
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.535	0.569	0.607	---	
	EWT-2	501.7	19.75	378	14.88	LN	C _V	27	382	773	1153	1535	1921	2286	2631	2954	3239	3482	0.89
							K _V		331	668	997	1328	1661	1978	2276	2555	2802	3012	---
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.539	---	
		501.7	19.75	429	16.88	LN-S	C _V	27	433	873	1310	1745	2170	2571	2936	3257	3528	3747	0.89
							K _V		375	755	1133	1510	1877	2224	2540	2818	3052	3241	---
							X _T		0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.545	0.576	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

March 2012 - Page EW-19

EWT-2, EWD, and EWT Whisper Trim III—Level C1																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel									F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	27	131	244	351	459	577	696	811	919	0.89
							K _v		113	211	303	397	499	602	701	795	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	---
		374.7	14.75	276	10.88	LN	C _v	27	161	318	478	637	787	936	1088	1247	0.89
							K _v		139	275	414	551	681	810	941	1079	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	---
		374.7	14.75	276	14.88	LN-S	C _v	27	221	430	642	855	1069	1284	1498	1712	0.89
							K _v		191	372	555	740	925	1111	1296	1481	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	30	146	272	392	513	645	777	906	1027	0.89
							K _v		126	235	339	444	558	672	784	888	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	---
		412.8	16.25	276	10.88	LN	C _v	30	180	355	534	712	880	1046	1216	1394	0.89
							K _v		156	307	462	616	761	905	1052	1206	---
							X _T		0.440	0.435	0.433	0.433	0.432	0.432	0.432	0.432	---
		412.8	16.25	276	14.88	LN-S	C _v	30	247	481	717	956	1195	1435	1675	1913	0.89
							K _v		214	416	620	827	1034	1241	1448	1655	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.431	---
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _v	27	131	244	351	459	577	696	811	919	0.89
							K _v		113	211	304	397	499	602	702	795	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	---
		374.7	14.75	276	10.88	LN	C _v	27	161	318	478	636	787	936	1087	1246	0.89
							K _v		139	275	413	550	681	810	940	1078	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	---
		374.7	14.75	378	14.88	LN	C _v	27	221	430	641	855	1069	1283	1497	1711	0.89
							K _v		191	372	554	740	925	1110	1295	1480	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	---
	EWT-2	412.8	16.25	203	8.00	SN	C _v	30	146	272	392	513	645	777	906	1027	0.89
							K _v		126	235	339	444	558	672	784	888	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	---
		412.8	16.25	276	10.88	LN	C _v	30	180	355	534	711	880	1046	1215	1393	0.89
							K _v		156	307	462	615	761	905	1051	1205	---
							X _T		0.440	0.435	0.433	0.433	0.432	0.432	0.432	0.432	---
		412.8	16.25	403	15.88	LN	C _v	30	270	514	778	1017	1282	1525	1783	2034	0.89
							K _v		234	445	673	880	1109	1319	1542	1759	---
							X _T		0.437	0.434	0.433	0.432	0.432	0.432	0.432	0.431	---



EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600
Whisper Trim™ III--Level C1
Flow Up through the Port

Catalog 12
March 2012 - Page EW-20

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel												F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100		
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _V	31	238	469	700	932	1165	1398	1628	1853	2069	2272	0.89	
							K _V		206	405	605	806	1008	1209	1409	1603	1790	1965	---	
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---	
		436.6	18.25	429	16.88	LN-S	C _V	31	271	534	795	1056	1316	1574	1828	2073	2305	2522	0.89	
							K _V		234	462	688	913	1138	1362	1581	1793	1994	2181	---	
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---	
	EWT-2	501.7	19.75	378	14.88	LN	C _V	34	260	514	767	1022	1278	1533	1786	2036	2277	2506	0.89	
							K _V		225	445	664	884	1105	1326	1545	1761	1969	2168	---	
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---	
		501.7	19.75	429	16.88	LN-S	C _V	34	297	586	872	1157	1442	1727	2007	2281	2544	2792	0.89	
							K _V		257	507	754	1001	1248	1494	1736	1973	2201	2415	---	
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---	

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer.

3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

**EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600**

Whisper Trim™ III -- Level C3
Flow Up through the Port

Catalog 12

March 2012 - Page EW-21

EWT-2, EWD, and EWT Whisper Trim III—Level C3																		Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
20x16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	19	116	235	344	458	574	682	800	912	1023	1141	0.89
							K _V		100	203	298	396	497	590	692	789	885	987	---
							X _T		0.443	0.437	0.434	0.433	0.433	0.432	0.432	0.432	0.431	0.431	---
		374.7	14.75	276	10.88	LN	C _V	19	161	311	471	623	776	935	1085	1240	1398	1547	0.89
							K _V		139	269	408	539	671	809	939	1073	1209	1338	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		374.7	14.75	276	14.88	LN-S	C _V	19	220	430	639	849	1063	1277	1490	1700	1893	2046	0.89
							K _V		191	372	553	734	919	1105	1289	1470	1637	1769	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.439	0.463	---
	EWT-2	412.8	16.25	203	8.00	SN	C _V	21	126	246	369	497	614	741	864	983	1113	1226	0.89
							K _V		109	213	319	430	531	641	747	851	963	1060	---
							X _T		0.443	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	---
		412.8	16.25	276	10.88	LN	C _V	21	170	338	502	676	840	1007	1180	1343	1513	1684	0.89
							K _V		147	292	434	584	727	871	1021	1162	1308	1456	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		412.8	16.25	276	14.88	LN-S	C _V	21	229	462	695	923	1151	1379	1611	1845	2077	2288	0.89
							K _V		198	400	601	799	995	1193	1394	1596	1797	1979	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	0.438	---
24X16	EWD, EWT	374.7	14.75	203	8.00	SN	C _V	19	116	235	344	458	574	682	800	912	1023	1127	0.89
							K _V		100	203	298	396	497	590	692	789	885	975	---
							X _T		0.443	0.437	0.434	0.433	0.433	0.432	0.432	0.432	0.431	0.431	---
		374.7	14.75	276	10.88	LN	C _V	19	161	311	471	623	775	935	1085	1239	1398	1532	0.89
							K _V		139	269	407	539	670	809	939	1072	1209	1325	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		374.7	14.75	378	14.88	LN	C _V	19	220	430	639	849	1062	1276	1490	1700	1882	2027	0.89
							K _V		190	372	553	734	919	1104	1289	1471	1628	1753	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.444	0.464	---
	EWT-2	412.8	16.25	203	8.00	SN	C _V	21	109	217	325	423	531	639	737	845	953	1034	0.89
							K _V		94	188	281	366	459	553	638	731	824	894	---
							X _T		0.445	0.438	0.435	0.434	0.433	0.432	0.432	0.432	0.431	0.431	---
		412.8	16.25	276	10.88	LN	C _V	21	155	297	439	580	722	864	1006	1148	1290	1431	0.89
							K _V		134	257	380	502	625	747	870	993	1116	1238	---
							X _T		0.441	0.436	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		412.8	16.25	403	15.88	LN	C _V	21	219	424	632	846	1056	1262	1467	1680	1893	2083	0.89
							K _V		189	367	547	732	913	1092	1269	1453	1637	1802	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	0.431	---



EWT-2, EWD, and EWT
NPS 16 and Larger Sizes
CL150, 300, and 600
Whisper Trim™ III--Level C3
Flow Up through the Port

Catalog 12
March 2012 - Page EW-22

Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con-struction ⁽²⁾	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
24x20	EWD, EWT	436.6	18.25	378	14.88	LN	C _V	23	231	458	681	904	1130	1358	1582	1800	2009	2210	0.89
							K _V		199	396	589	782	978	1174	1369	1557	1738	1912	---
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
		436.6	18.25	429	16.88	LN-S	C _V	23	260	520	776	1031	1285	1537	1784	2024	2252	2466	0.89
							K _V		225	450	671	892	1111	1329	1543	1750	1948	3122	---
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
	EWT-2	501.7	19.75	378	14.88	LN	C _V	25	253	503	748	993	1241	1491	1739	1980	2214	2441	0.89
							K _V		219	435	647	859	1074	1290	1504	1713	1915	2111	---
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
		501.7	19.75	429	16.88	LN-S	C _V	25	286	571	853	1132	1411	1689	1963	2231	2488	2733	0.89
							K _V		248	494	737	979	1221	1461	1698	1929	2152	2364	---
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

EWT-2, EWD, and EWT Whisper Trim III—Level D1																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel									F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	
20x16	EWT-2, EWD, EWT	355.6	14	203	8.00	SN	C _v	25	119	220	322	431	543	653	754	855	0.89
							K _v		103	190	278	373	470	564	653	740	---
							X _T		0.442	0.437	0.434	0.433	0.433	0.432	0.432	0.432	---
		355.6	14	276	10.88	LN	C _v	25	152	292	441	592	740	881	1021	1165	0.89
							K _v		131	253	381	512	640	762	883	1008	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	---
		355.6	14	276	14.88	LN-S	C _v	25	208	405	602	799	998	1199	1401	1603	0.89
							K _v		180	350	521	691	863	1037	1212	1386	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	---
24x16	EWT-2, EWD, EWT	355.6	14	203	8.00	SN	C _v	25	123	230	331	433	543	655	764	865	0.89
							K _v		106	199	286	375	470	567	661	748	---
							X _T		0.442	0.436	0.434	0.433	0.433	0.432	0.432	0.432	---
		355.6	14	276	10.88	LN	C _v	25	152	300	450	599	741	881	1023	1173	0.89
							K _v		131	260	389	518	641	762	885	1015	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	---
		355.6	14	378	14.88	LN	C _v	25	208	405	604	805	1006	1208	1410	1610	0.89
							K _v		180	350	522	696	870	1045	1220	1393	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.432	---
24x20	EWT-2, EWD, EWT	431.8	17	378	14.88	LN	C _v	29	229	444	661	881	1102	1322	1543	1763	0.89
							K _v		198	384	572	762	953	1144	1335	1525	---
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	---
		431.8	17	429	16.88	LN-S	C _v	29	260	506	752	998	1244	1491	1739	1987	0.89
							K _v		225	437	650	863	1076	1290	1504	1719	---
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	---

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer.

3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.



EWT-2, EWD, and EWT Whisper Trim III—Level D3																		Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Valve Type	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
		mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
20x16	EWT-2, EWD, EWT	355.6	14	203	8.00	SN	C _v	18	108	209	319	425	529	641	743	850	959	1060	0.89
							K _v		93	181	276	368	457	554	643	736	830	917	---
							X _t		0.444	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	---
		355.6	14	276	10.88	LN	C _v	18	143	292	432	580	727	867	1017	1161	1304	1442	0.89
							K _v		123	252	374	502	629	750	880	1005	1128	1247	---
							X _t		0.441	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		355.6	14	276	14.88	LN-S	C _v	18	194	395	597	798	995	1192	1390	1591	1760	1901	0.89
							K _v		168	342	517	690	861	1031	1202	1376	1522	1644	---
							X _t		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.448	0.474	---
24X16	EWT-2, EWD, EWT	355.6	14	203	8.00	SN	C _v	18	109	216	319	431	534	641	750	852	962	1068	0.89
							K _v		94	187	276	373	462	554	649	737	832	924	---
							X _T		0.443	0.437	0.435	0.433	0.433	0.432	0.432	0.432	0.431	0.431	---
		355.6	14	276	10.88	LN	C _v	18	150	292	437	586	727	873	1021	1162	1310	1442	0.89
							K _v		130	253	378	507	629	755	883	1005	1133	1247	---
							X _T		0.440	0.435	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.431	---
		355.6	14	378	14.88	LN	C _v	18	194	395	597	798	995	1192	1390	1591	1751	1897	0.89
							K _v		168	342	517	690	861	1031	1202	1376	1515	1641	---
							X _T		0.438	0.434	0.433	0.432	0.432	0.432	0.432	0.431	0.452	0.476	---
24x20	EWT-2, EWD, EWT	431.8	17	378	14.88	LN	C _v	21	222	433	643	853	1067	1282	1496	1706	1916	2126	0.89
							K _v		192	375	556	738	923	1109	1294	1476	1657	1839	---
							X _T		0.530	0.529	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
		431.8	17	429	16.88	LN-S	C _v	21	250	492	733	973	1213	1453	1693	1932	2173	2414	0.89
							K _v		216	425	634	842	1049	1257	1464	1672	1879	2088	---
							X _T		0.530	0.529	0.528	0.528	0.528	0.528	0.528	0.528	0.528	0.528	---
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer. 3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.																			

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.
2. Construction—SN = short-neck valve; LN = long-neck valve; LN-S = long-neck valve with bonnet spacer.
3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might result.

WhisperFlo Level X																Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches		Min	10	20	30	40	50	60	70	80	90	100
6x4	87.3	3.4375	102	4	C _v	6.4	16.7	35.3	52.5	69.5	87.6	105	121	136	154	164
					X _T	0.763	0.763	0.783	0.751	0.726	0.696	0.691	0.699	0.738	0.719	0.72
8x4	87.3	3.4375	102	4	C _v	6.4	17.8	35.8	52.5	69.7	86.9	104	121	137	153	165
					X _T	0.705	0.705	0.79	0.763	0.747	0.72	0.722	0.717	0.701	0.691	0.676
8x6 10 x 6 ⁽²⁾	136.5	5.375	127	5	C _v	10.4	45.7	92	138	181	223	265	299	331	350	365
					X _T	0.64	0.64	0.648	0.633	0.617	0.624	0.642	0.682	0.71	0.769	0.803
12x6	136.5	5.375	165	6.5	C _v	10.4	56.9	114	170	224	288	328	377	425	472	510
					X _T	0.735	0.735	0.759	0.741	0.726	0.661	0.699	0.707	0.706	0.718	0.724
10x8	177.8	7	152	6	C _v	30.4	61.4	120	179	238	296	352	408	459	508	550
					X _T	0.694	0.694	0.713	0.662	0.641	0.629	0.637	0.632	0.64	0.667	0.673
12x8	177.8	7	203	8	C _v	30.4	103	188	277	353	432	515	583	652	703	736
					X _T	0.656	0.656	0.678	0.627	0.656	0.666	0.657	0.667	0.684	0.709	0.749
WhisperFlo Level Y																Linear Characteristic
6x4	87.3	3.4375	102	4	C _v	6	16	31	47	63	79	94	110	126	141	157
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
8x4	87.3	3.4375	102	4	C _v	6	16	31	47	63	79	94	110	126	141	157
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
8x6 10 x 6 ⁽²⁾	136.5	5.375	127	5	C _v	10	31	61	92	123	154	184	215	246	276	307
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
12x6	136.5	5.375	165	6.5	C _v	9	39	78	116	155	194	233	272	310	349	388
					X _T	0.536	0.536	0.532	0.525	0.51	0.503	0.507	0.514	0.528	0.532	0.575
10x8	177.8	7	152	6	C _v	11	42	84	125	167	209	251	293	334	376	418
					X _T	0.51	0.51	0.543	0.547	0.536	0.46	0.496	0.496	0.514	0.547	0.609
12x8	177.8	7	203	8	C _v	12	59	118	177	236	295	354	413	472	531	590
					X _T	0.562	0.562	0.573	0.543	0.525	0.539	0.558	0.558	0.577	0.577	0.577
WhisperFlo Level Z																Linear Characteristic
6x4	87.3	3.4375	102	4	C _v	3	9	17	26	34	43	52	60	69	77	86
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
8x4	87.3	3.4375	102	4	C _v	3	9	17	26	34	43	52	60	69	77	86
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
8x6 10 x 6 ⁽²⁾	136.5	5.375	127	5	C _v	5	17	35	52	69	87	104	121	138	156	173
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
12x6	136.5	5.375	165	6.5	C _v	5	23	45	68	90	113	135	158	180	203	225
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
10x8	177.8	7	152	6	C _v	7	26	52	78	104	130	156	182	208	234	260
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
12x8	177.8	7	203	8	C _v	7	35	71	106	141	177	212	247	282	318	353
					X _T	0.600	0.600	0.539	0.521	0.528	0.528	0.547	0.539	0.525	0.507	0.525
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size. 2. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																

EW-2, EW-3, and EW-4 CL150, 300, and 600

WhisperFlo™ Trim
Flow Up through the Port

Catalog 12
March 2012 - Page EW-26

WhisperFlo Level X																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con-struction	Flow Coeffi-cient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches			Min	10	20	30	40	50	60	70	80	90	100
20x16	374.7	14.75	203	8	SN	C _v	60.2	170	359	546	731	912	1089	1260	1427	1587	1741
						X _T	0.534	0.713	0.699	0.687	0.677	0.669	0.663	0.659	0.656	0.655	0.654
20x16	374.7	14.75	276	10.875	LN	C _v	60.2	238	494	745	990	1226	1452	1667	1870	2061	2240
						X _T	0.534	0.708	0.690	0.676	0.666	0.659	0.656	0.654	0.655	0.658	0.662
20x16	374.7	14.75	378	14.875	LN	C _v	60.2	332	679	1015	1339	1633	1911	2165	2397	2606	2793
						X _T	0.534	0.701	0.679	0.665	0.657	0.654	0.656	0.660	0.667	0.676	0.686
24x16	374.7	14.75	203	8	SN	C _v	60.2	170	360	548	735	921	1104	1285	1462	1636	1807
						X _T	0.534	0.716	0.703	0.692	0.682	0.673	0.665	0.658	0.652	0.647	0.642
24x16	374.7	14.75	276	10.875	LN	C _v	60.2	238	495	750	1001	1248	1490	1725	1953	2173	2385
						X _T	0.534	0.711	0.695	0.681	0.669	0.659	0.651	0.644	0.639	0.635	0.632
24x16	374.7	14.75	378	14.875	LN	C _v	60.2	333	683	1027	1363	1687	1999	2296	2578	2843	3092
						X _T	0.534	0.705	0.685	0.668	0.655	0.645	0.638	0.633	0.630	0.628	0.628
24x20	463.6	18.25	203	8	SN	C _v	86.5	207	431	658	882	1104	1322	1537	1747	1952	2152
						X _T	0.534	0.714	0.703	0.692	0.683	0.676	0.669	0.664	0.660	0.657	0.655
24x20	463.6	18.25	276	10.875	LN	C _v	86.5	286	595	900	1200	1493	1779	2056	2322	2578	2823
						X _T	0.534	0.710	0.695	0.683	0.673	0.665	0.659	0.656	0.654	0.653	0.654
24x20	463.6	18.25	378	14.875	LN	C _v	86.5	400	820	1231	1630	2012	2376	2720	3043	3343	3622
						X _T	0.534	0.704	0.686	0.672	0.662	0.656	0.653	0.653	0.655	0.659	0.665
WhisperFlo Level Y																	Linear Characteristic
20x16	374.7	14.75	203	8	SN	C _v	53.4	124	259	394	529	662	794	923	1051	1176	1298
						X _T	0.534	0.617	0.608	0.601	0.594	0.588	0.584	0.580	0.577	0.575	0.573
20x16	374.7	14.75	276	10.875	LN	C _v	53.4	171	356	539	720	897	1070	1239	1402	1560	1712
						X _T	0.534	0.614	0.603	0.594	0.586	0.581	0.577	0.574	0.573	0.573	0.574
20x16	374.7	14.75	378	14.875	LN	C _v	53.4	239	491	738	979	1212	1435	1648	1849	2038	2216
						X _T	0.534	0.609	0.596	0.586	0.579	0.574	0.573	0.573	0.575	0.579	0.585
24x16	374.7	14.75	203	8	SN	C _v	53.4	125	259	395	531	666	800	933	1065	1195	1324
						X _T	0.534	0.619	0.611	0.604	0.598	0.592	0.587	0.582	0.578	0.574	0.570
24x16	374.7	14.75	276	10.875	LN	C _v	53.4	171	357	541	724	906	1085	1262	1436	1607	1774
						X _T	0.534	0.616	0.606	0.597	0.590	0.583	0.577	0.572	0.568	0.564	0.561
24x16	374.7	14.75	378	14.875	LN	C _v	53.4	240	492	743	991	1234	1472	1703	1928	2146	2356
						X _T	0.534	0.612	0.600	0.589	0.580	0.573	0.567	0.562	0.559	0.556	0.555
24x20	463.6	18.25	203	8	SN	C _v	77.3	148	294	449	603	757	909	1060	1209	1357	1503
						X _T	0.534	0.579	0.573	0.568	0.563	0.558	0.554	0.551	0.548	0.545	0.543
24x20	463.6	18.25	276	10.875	LN	C _v	77.3	198	406	615	823	1029	1232	1433	1629	1822	2010
						X _T	0.534	0.577	0.569	0.562	0.556	0.552	0.548	0.544	0.542	0.540	0.539
24x20	463.6	18.25	378	14.875	LN	C _v	77.3	272	560	845	1125	1401	1669	1931	2183	2427	2662
						X _T	0.534	0.574	0.564	0.556	0.550	0.545	0.542	0.540	0.539	0.540	0.541
1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.																	

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and WhisperFlo are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

WhisperFlo Level Z																Linear Characteristic	
Valve Size, NPS⁽¹⁾	Port Diameter		Maximum Travel		Con- struction	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches			Min	10	20	30	40	50	60	70	80	90	100
20x16	374.7	14.75	203	8	SN	C _v	48.1	91	179	273	367	460	553	645	737	827	917
						X _T	0.534	0.467	0.463	0.459	0.456	0.453	0.450	0.448	0.446	0.445	0.444
20x16	374.7	14.75	276	10.875	LN	C _v	48.1	121	247	374	501	627	751	874	994	1113	1229
						X _T	0.534	0.465	0.460	0.456	0.452	0.449	0.446	0.444	0.443	0.442	0.442
20x16	374.7	14.75	378	14.875	LN	C _v	48.1	166	341	514	685	854	1019	1180	1336	1488	1634
						X _T	0.534	0.463	0.457	0.451	0.447	0.444	0.443	0.442	0.442	0.443	0.445
24x16	374.7	14.75	203	8	SN	C _v	48.1	91	179	273	368	462	555	649	742	834	926
						X _T	0.534	0.468	0.464	0.461	0.458	0.455	0.453	0.450	0.448	0.446	0.444
24x16	374.7	14.75	276	10.875	LN	C _v	48.1	121	267	375	503	630	756	881	1006	1129	1251
						X _T	0.534	0.466	0.462	0.458	0.454	0.451	0.447	0.445	0.442	0.440	0.438
24x16	374.7	14.75	378	14.875	LN	C _v	48.1	166	341	516	689	861	1032	1200	1365	1528	1688
						X _T	0.534	0.465	0.459	0.454	0.449	0.445	0.442	0.439	0.437	0.435	0.434
24x20	463.6	18.25	203	8	SN	C _v	71.8	113	214	324	435	546	657	767	877	986	1094
						X _T	0.534	0.454	0.451	0.448	0.446	0.443	0.441	0.439	0.437	0.436	0.434
24x20	463.6	18.25	276	10.875	LN	C _v	71.8	149	292	444	595	745	894	1042	1188	1333	1476
						X _T	0.534	0.453	0.449	0.446	0.442	0.440	0.437	0.435	0.433	0.432	0.431
24x20	463.6	18.25	378	14.875	LN	C _v	71.8	200	404	610	815	1018	1218	1416	1609	1800	1986
						X _T	0.534	0.452	0.442	0.442	0.438	0.435	0.433	0.431	0.430	0.430	0.430

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.



EWT-2, EWD, and EWT NPS 16 and Larger Sizes CL150, 300, and 600

Cavitrol™ III -- One Stage
Flow Down through the Port

Catalog 12
March 2012 - Page EW-28

EWT-2, EWD, and EWT Cavitrol III Trim—One Stage																	Linear Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Con- struc- tion ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L
	mm	Inches	mm	Inches			Min ⁽³⁾	10	20	30	40	50	60	70	80	90	100	
16 x 12	279.4	11.00	203	8.00	LND	C _v	40	132	304	471	628	775	910	1030	1140	1240	1330	0.91
						K _v	34.6	114	263	407	543	670	787	891	986	1073	1150	---
20 x 16	374.7	14.75	276	10.88	LND	C _v	46	262	576	877	1160	1420	1660	1880	2070	2240	2390	0.91
						K _v	39.8	227	498	759	1003	1228	1436	1626	1791	1938	2067	---
	374.7	14.75	378	14.88	LN-SD	C _v	46	379	800	1190	1540	1850	2110	2330	2510	2670	2800	0.91
						K _v	39.8	328	692	1029	1332	1600	1825	2015	2171	2310	2422	---
24 x 16	374.7	14.75	276	10.88	LND	C _v	46	262	576	878	1160	1420	1160	1880	2070	2240	2390	0.91
						K _v	39.8	227	498	759	1003	1228	1003	1626	1791	1938	2067	---
	374.7	14.75	378	14.88	LND	C _v	46	379	800	1190	1540	1850	2110	2330	2520	2670	2800	0.91
						K _v	39.8	328	692	1029	1332	1600	1825	2015	2180	2310	2422	---
	374.7	14.75	429	16.88	LN-SD	C _v	46	437	909	1340	1710	2030	2290	2510	2680	2830	2940	0.91
						K _v	39.8	378	786	1159	1479	1756	1981	2171	2318	2448	2543	---
24 x 20	463.6	18.25	378	14.88	LND	C _v	56	468	995	1490	1960	2370	2750	3070	3360	3600	3810	0.91
						K _v	48.4	405	861	1289	1695	2050	2379	2656	2906	3114	3296	---
	463.6	18.25	429	16.88	LN-SD	C _v	56	540	1130	1690	2190	2630	3010	3340	3620	3860	4050	0.91
						K _v	48.4	467	977	1462	1894	2275	2604	2889	3131	3339	3503	---

1. The first number indicates both inlet and outlet size. The second number indicates effective trim size.

2. Construction—SND = short-neck valve, drilled windows; LND - long-neck valve, drilled windows; LN-SD = long-neck valve with bonnet spacer, drilled windows.

3. Do not allow the valve to throttle at less than the minimum coefficient shown for an extended time, or erosion damage to the valve seat might occur.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher, WhisperFlo, and Cavitrol are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Quick Opening																Quick Opening Characteristic		
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coefficient	Coeffs. for 6 mm (0.25 in) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾	
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
4 x 2	58.7	2.3125	29	1.125	C _V	29.9	13.7	26.9	42.1	60.0	76.8	90.2	101	110	117	123	0.89	
					K _V		11.9	23.3	36.4	51.9	66.4	78.0	87.4	95.2	101	106	---	
					X _T		0.660	0.639	0.663	0.652	0.660	0.705	0.777	0.843	0.868	0.860	0.793	---
6 x 4	111.1	4.375	51	2	C _V	48.1	39.4	85.2	147	208	268	321	355	373	379	382	0.88	
					K _V		34.1	73.7	127	180	232	278	307	323	328	330	---	
					X _T		0.600	0.619	0.587	0.591	0.633	0.662	0.682	0.726	0.748	0.770	0.781	---
8 x 4	111.1	4.375	51	2	C _V	51.3	42.1	88.2	149	212	269	314	365	405	437	450	0.85	
					K _V		36.4	76.3	129	183	233	272	316	350	378	389	---	
					X _T		0.585	0.578	0.573	0.560	0.579	0.640	0.726	0.733	0.726	0.727	0.704	---
8 x 6 and 10x6 ⁽⁴⁾	177.8	7	51	2	C _V	97.8	79.3	152	249	346	442	533	606	650	683	714	0.86	
					K _V		68.6	131	215	299	382	461	524	562	591	618	---	
					X _T		0.661	0.682	0.671	0.634	0.655	0.663	0.681	0.688	0.709	0.715	0.671	---
12 x 6	177.8	7	51	2	C _V	109	86.1	168	261	359	460	554	641	720	799	874	0.79	
					K _V		74.5	145	226	311	398	479	554	623	691	756	---	
					X _T		0.594	0.614	0.563	0.571	0.608	0.630	0.660	0.677	0.706	0.735	0.736	---
10 x 8	203.2	8	76	3	C _V	---	151	313	471	617	748	848	918	956	971	1000	0.93	
					K _V		131	271	407	534	647	734	794	827	840	865	---	
					X _T		---	0.632	0.606	0.625	0.663	0.698	0.751	0.798	0.838	0.864	0.842	---
12 x 8	203.2	8	76	3	C _V	---	157	322	480	632	760	860	957	1030	1080	1110	0.89	
					K _V		---	136	279	415	547	657	744	828	891	934	960	---
					X _T		---	0.718	0.716	0.712	0.730	0.789	0.844	0.855	0.873	0.866	0.836	---
Linear																Linear Characteristic		
4 x 2	58.7	2.3125	29	1.125	C _V	---	6.88	13.7	21.5	29.9	39.1	49.0	60.0	72.2	84.5	96.2	0.89	
					K _V		5.95	11.9	18.6	25.9	33.8	42.4	51.9	62.5	73.1	83.2	---	
					X _T		0.599	0.662	0.728	0.742	0.745	0.743	0.744	0.761	0.777	0.794	---	
6 x 4	111.1	4.375	51	2	C _V	---	26.2	52.5	78.4	105	133	162	197	236	281	320	0.89	
					K _V		22.7	45.4	67.8	90.8	115	140	170	204	243	277	---	
					X _T		0.713	0.640	0.661	0.667	0.659	0.666	0.666	0.676	0.690	0.725	---	
8 x 4	111.1	4.375	51	2	C _V	---	25.1	51.5	78.1	104	130	157	192	234	281	328	0.89	
					K _V		21.7	44.5	67.6	90.0	112	136	166	202	243	284	---	
					X _T		0.610	0.657	0.682	0.688	.0700	0.715	0.716	0.711	0.716	0.729	---	
8 x 6 and 10x6 ⁽⁴⁾	177.8	7	51	2	C _V	---	52.5	116	182	246	311	375	435	495	554	607	0.88	
					K _V		45.4	100	157	213	269	324	376	428	479	525	---	
					X _T		0.655	0.678	0.688	0.708	0.726	0.728	0.723	0.729	0.720	0.679	---	
12 x 6	177.8	7	51	2	C _V	---	57.4	122	186	248	311	375	441	510	591	675	0.84	
					K _V		49.7	106	161	215	269	324	381	441	511	584	---	
					X _T		0.523	0.572	0.612	0.654	0.659	0.683	0.704	0.719	0.723	0.719	---	
10 x 8	203.2	8	76	3	C _V	---	106	210	315	427	546	661	766	848	905	958	0.92	
					K _V		91.7	182	272	369	472	572	663	734	783	829	---	
					X _T		0.677	0.677	0.708	0.711	0.702	0.705	0.731	0.777	0.831	0.820	---	
12 x 8	203.2	8	76	3	C _V	---	119	218	336	447	564	680	795	895	981	1050	0.89	
					K _V		103	189	291	387	488	588	688	774	849	908	---	
					X _T		0.678	0.768	0.811	0.791	0.802	0.811	0.809	0.819	0.837	0.836	---	
<div>1. The first number indicates both inlet and outlet sizes. The second number indicates effective trim size.</div> <div>2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel.</div> <div>3. At 100% travel.</div> <div>4. NPS 10x6 has a valve outlet area identical to the NPS 8x6.</div>																		

Equal Percentage															Equal Percentage Characteristic	
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
4 x 2	58.7	2.3125	29	1.125	C _V	2.40	4.16	5.97	8.37	12.2	17.6	26.3	38.1	52.7	67.5	0.90
					K _V	2.08	3.60	5.16	7.24	10.6	15.2	22.7	33.0	45.6	58.4	---
					X _T	0.751	0.770	0.781	0.776	0.769	0.773	0.732	0.739	0.754	0.777	---
6 x 4	111.1	4.375	51	2	C _V	7.18	12.3	18.2	26.7	39.8	61.0	100	158	217	271	0.88
					K _V	6.21	10.6	15.7	23.1	34.4	52.8	86.5	137	188	234	---
					X _T	0.794	0.778	0.775	0.773	0.773	0.776	0.718	0.687	0.707	0.694	---
8 x 4	111.1	4.375	51	2	C _V	8.37	12.8	20.0	28.5	42.2	64.6	102	156	214	269	0.90
					K _V	7.24	11.1	17.3	24.7	36.5	55.9	88.2	135	185	233	---
					X _T	0.761	0.731	0.716	0.745	0.758	0.724	0.701	0.684	0.709	0.704	---
8 x 6 and 10x6 ⁽¹⁾	177.8	7	51	2	C _V	12.0	22.8	36.9	58.8	91.3	149	226	311	397	478	0.92
					K _V	10.4	19.7	31.9	50.9	79.0	129	195	269	343	413	---
					X _T	0.733	0.783	0.874	0.859	0.836	0.791	0.773	0.782	0.755	0.727	---
12 x 6	177.8	7	51	2	C _V	18.6	30.0	43.8	65.7	97.1	153	231	312	395	476	0.88
					K _V	16.1	25.9	37.9	56.8	84.0	132	200	270	342	412	---
					X _T	0.661	0.694	0.824	0.813	0.812	0.802	0.764	0.777	0.774	0.788	---
10 x 8	203.2	8	76	3	C _V	33.9	61.2	97.7	162	269	417	568	705	840	932	0.90
					K _V	29.3	52.9	84.5	140	233	361	491	610	727	806	---
					X _T	0.836	0.867	0.894	0.796	0.744	0.704	0.699	0.712	0.725	0.760	---
12 x 8	203.2	8	76	3	C _V	28.8	58.1	102	175	294	452	654	859	989	1020	0.88
					K _V	24.9	50.3	88.2	151	254	391	566	743	855	882	---
					X _T	0.769	0.832	0.928	0.930	0.797	0.744	0.651	0.581	0.646	0.766	---
1. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																

1. NPS 10x6 has a valve outlet area identical to the NPS 8x6.

Whisper Trim I																Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
4 x 2	58.7	2.3125	29	1.125	C _V	14.2	27.7	39.8	51.7	63.8	76.2	88.3	99.9	111	118	---
					K _V	12.3	24.0	34.4	44.7	55.2	65.9	76.4	86.4	96.0	102	---
					X _T	0.321	0.323	0.322	0.320	0.323	0.322	0.324	0.323	0.320	0.322	---
6 x 4	111.1	4.375	51	2	C _V	30.9	71.5	110	150	185	221	252	280	302	325	---
					K _V	26.7	61.8	95	130	160	191	218	242	261	281	---
					X _T	0.689	0.456	0.386	0.350	0.362	0.368	0.409	0.390	0.413	0.418	---
8 x 4	111.1	4.375	51	2	C _V	34.3	75.5	115	153	190	226	261	295	322	343	---
					K _V	29.7	65.3	99	132	164	195	226	255	279	297	---
					X _T	0.486	0.310	0.274	0.263	0.260	0.258	0.262	0.266	0.274	0.279	---
8 x 6 and 10x6 ⁽²⁾	177.8	7	51	2	C _V	42.0	95.5	157	223	282	346	411	474	528	575	---
					K _V	36.3	82.6	136	193	244	299	356	410	457	497	---
					X _T	0.571	0.460	0.386	0.358	0.358	0.345	0.331	0.324	0.334	0.319	---
			102	4	C _V	100	257	360	443	498	531	558	582	604	626	---
					K _V	86.5	222	311	383	431	459	483	503	522	541	---
					X _T	0.308	0.228	0.305	0.351	0.432	0.566	0.652	0.710	0.748	0.744	---
12 x 6	177.8	7	51	2	C _V	49.6	123	193	262	331	401	466	532	592	639	---
					K _V	42.9	106	167	227	286	347	403	460	512	553	---
					X _T	0.572	0.345	0.310	0.296	0.289	0.280	0.282	0.277	0.279	0.274	---
			102	4	C _V	94.0	229	345	450	544	650	765	835	855	940	---
					K _V	81.3	198	298	389	471	562	662	722	740	813	---
					X _T	0.357	0.292	0.336	0.334	0.363	0.384	0.369	0.410	0.490	0.462	---
10 x 8	203.2	8	76	3	C _V	88.1	230	361	469	559	654	739	808	851	881	---
					K _V	76.2	199	312	406	484	566	639	699	736	762	---
					X _T	0.507	0.393	0.348	0.338	0.359	0.379	0.409	0.434	0.469	0.536	---
			102	4	C _V	136	315	471	600	713	802	868	895	894	942	---
					K _V	118	272	407	519	617	694	751	774	773	815	---
					X _T	0.453	0.358	0.347	0.365	0.390	0.433	0.490	0.582	0.690	0.694	---

1. The first number indicates both body inlet and outlet size. The second number indicates effective trim size.
2. NPS 10x6 has a valve outlet area identical to the NPS 8x6.



Whisper Trim III - Flow Up																Linear Characteristic ⁽¹⁾
Valve Size, NPS ⁽²⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										x _T ⁽⁴⁾
	mm	Inches	mm	Inches		Minimum ⁽³⁾	20	30	40	50	60	70	80	90	100	
A3 ΔP/P1 ≤ 0.6																
8 x 6 and 10x6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.00	96.5	157	213	267	323	378	422	452	460	0.727
					K _v	3.46	83.5	136	184	231	279	327	365	391	398	---
12 x 6	136.5	5.375	165	6.5	C _v	4.00	124	192	258	320	383	440	500	554	603	0.766
					K _v	3.46	107	166	223	277	331	381	433	479	522	---
B3 ΔP/P1 ≤ 0.6																
8 x 6 and 10x6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	72.3	108	143	178	213	248	280	314	347	0.563
					K _v	4.04	62.5	93	124	154	184	215	242	272	300	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	94.0	141	187	233	278	324	370	413	457	0.563
					K _v	4.04	81.3	122	162	202	240	280	320	357	395	---
C3 ΔP/P1 ≤ 0.6																
8 x 6 and 10x6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	50.0	74.7	99.3	124	149	173	197	221	245	0.563
					K _v	4.04	43.3	64.6	85.9	107	129	150	170	191	212	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	64.0	96.0	127	160	191	222	254	284	315	0.563
					K _v	4.04	55.4	83.0	110	138	165	192	220	246	272	---
D3 ΔP/P1 ≤ 0.6																
8 x 6 and 10x6 ⁽⁵⁾	136.5	5.375	127	5	C _v	4.67	12.7	31.4	55.0	79.7	104	128	152	177	201	0.563
					K _v	4.04	11.0	27.2	47.6	68.9	90.0	111	131	153	174	---
12 x 6	136.5	5.375	165	6.5	C _v	4.67	23.8	53.3	85.0	116	148	180	211	243	273	0.563
					K _v	4.04	20.6	46.1	73.5	100	128	156	183	210	236	---
1. Level D exhibits an equal percentage characteristic for the first 1-5 inch (38 mm) of travel, then linear characteristic. 2. The first number indicates both body inlet and outlet size. The second number indicates effective trim size. 3. Valves should not be required to throttle at less than the specified minimum coefficient for an extended period of time. Erosion damage to the valve seats may result. 4. This column lists x _T factors at 100% travel. 5. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																

Quick Opening - Flow Up																Quick Opening Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
8 x 6	177.8	7	51	2	C _V	78.3	150	247	343	438	528	600	643	676	706	0.87
					K _V	67.7	130	214	297	379	457	519	556	585	611	---
					X _T	0.760	0.745	0.697	0.715	0.733	0.751	0.758	0.786	0.787	0.747	---
12 x 8	203.8	8	76	3	C _V	157	322	480	632	760	860	957	1030	1080	1110	0.89
					K _V	136	279	415	547	657	744	828	891	934	960	---
					X _T	0.718	0.716	0.712	0.730	0.789	0.844	0.855	0.873	0.866	0.836	---
Linear - Flow Up																Linear Characteristic
8 x 6	177.8	7	51	2	C _V	51.5	115	181	245	310	374	434	494	553	606	0.89
					K _V	44.5	99	157	212	268	324	375	427	478	524	---
					X _T	0.764	0.775	0.781	0.803	0.830	0.826	0.818	0.821	0.809	0.772	---
12 x 8	203.8	8	76	3	C _V	119	218	336	447	564	680	795	895	981	1050	0.89
					K _V	103	189	291	387	488	588	688	774	849	908	---
					X _T	0.678	0.768	0.811	0.791	0.802	0.811	0.809	0.819	0.837	0.836	---
Equal Percentage - Flow Up																Equal Percentage Characteristic
8 x 6	177.8	7	51	2	C _V	11.0	21.8	34.9	54.8	86.3	140	212	292	373	447	0.92
					K _V	9.5	18.9	30.2	47.4	74.6	121	183	253	323	387	---
					X _T	0.839	0.823	0.935	0.953	0.897	0.859	0.844	0.855	0.819	0.791	---
12 x 8	203.8	8	76	3	C _V	28.8	58.1	102	175	294	452	654	859	989	1020	0.88
					K _V	24.9	50.3	88	151	254	391	566	743	855	882	---
					X _T	0.769	0.832	0.928	0.930	0.797	0.744	0.651	0.581	0.646	0.766	---
1. The first number indicates both body inlet and outlet size. The second number indicates effective trim size. 2. At 100% travel.																

CL150, 300, and 600 - Flow Down																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Minimum Throttling C _v ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
One Stage																	
4 x 2	58.7	2.3125	29	1.125	3.90	C _v	0.52	1.87	5.71	11.7	17.4	23.0	28.9	35.1	41.1	43.6	0.91
						K _v	0.450	1.62	4.94	10.1	15.1	19.9	25.0	30.4	35.6	37.7	---
6 x 4	111.1	4.375	54	2.125	5.20	C _v	2.03	20.3	41.1	61.5	81.5	101	121	140	158	169	0.95
						K _v	1.76	17.6	35.6	53.2	70.5	87.4	105	121	137	146	---
8 x 4	111.1	4.375	54	2.125	5.20	C _v	2.57	21	42	62.6	82.9	103	124	143	161	171	0.95
						K _v	2.22	18.2	36.3	54.1	71.7	89.1	107.3	124	139	148	---
8 x 6 10 x 6(1)	177.8	7	57	2.25	10.0	C _v	4.40	29	63.9	99.9	136	171	205	237	269	293	0.93
						K _v	3.81	25.1	55.3	86.4	118	148	177	205	233	253	---
12 x 6	177.8	7	57	2.25	10.0	C _v	5.49	34.5	71.1	106	143	179	216	250	283	305	0.93
						K _v	4.75	29.8	61.5	91.7	124	155	187	216	245	264	---
12 x 8 ⁽⁴⁾	203.2	8	86	3.375	15.0	C _v	13.6	62.3	117	171	225	278	331	385	438	487	0.90
						K _v	11.8	53.9	101	148	195	240	286	333	379	421	---
12 x 8 ⁽⁵⁾	203.2	8	152	6	15.0	C _v	82.0	163	245	327	408	490	572	653	735	816	0.92
						K _v	70.9	141	212	283	353	424	495	565	636	706	---
Two Stage																	
4 x 2	4736	1.875	51	2	0.92	C _v	0.84	3.19	5.54	7.92	10.3	12.5	15.4	17.3	19.7	22.0	0.98
						K _v	0.73	2.76	4.79	6.85	8.91	10.8	13.3	15.0	17.0	19.0	---
6 x 4	73.0	2.875	102	4	1.90	C _v	3.48	11.0	18.5	26.0	33.4	41.0	48.5	56.0	63.2	71.0	0.98
						K _v	3.01	9.52	16.0	22.5	28.9	35.5	42.0	48.4	54.7	61.4	---
8 x 6 10 x 6(1)	136.5	5.375	127	5	3.00	C _v	10.9	29.4	47.9	66.6	85.1	104	122	140	160	178	0.98
						K _v	9.43	25.4	41.4	57.6	73.6	90.0	106	121	138	154	---
12 x 6	136.5	5.375	152	6	3.00	C _v	14.1	35.6	57.0	78.6	100	121	143	165	186	208	0.98
						K _v	12.2	30.8	49.3	68.0	86.5	105	124	143	161	180	---
12 x 8	177.8	7	152	6	7	C _v	27.7	54.7	81.6	109	137	163	190	218	245	272	0.98
						K _v	24.0	47.3	70.6	94.3	119	141	164	189	212	235	---
1. NPS 10x6 has a valve outlet area identical to the NPS 8x6.																	

1. NPS 10x6 has a valve outlet area identical to the NPS 8x6.

CL900 - Flow Down																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Minimum Throttling C _V ⁽²⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
One Stage																	
8 x 6	177.8	7	51	2	10.0	C _V	3.96	26.0	51.9	77.9	104	130	156	181	207	236	0.93
						K _V	3.43	22.5	44.9	67.4	90.0	112	135	157	179	204	---
			127	5	10.0	C _V	24.8	79.2	131	183	238	292	344	396	451	495	0.93
						K _V	21.5	68.5	113	158	206	253	298	343	390	428	---
12 x 8 ⁽⁴⁾	203.3	8	60	3.375	15.0	C _V	13.6	62.3	117	171	225	278	331	385	438	487	0.90
						K _V	11.8	53.9	101	148	195	240	286	333	379	421	---
12 x 8 ⁽⁵⁾	203.3	8	152	6	15.0	C _V	69.0	138	207	276	345	414	483	552	622	690	0.92
						K _V	59.7	119	179	239	298	358	418	477	538	597	---
Two Stage																	
8 x 6	136.5	5.375	127	5	3.00	C _V	11.8	32.0	52.2	72.5	92.7	113	133	153	174	175	0.98
						K _V	10.2	27.7	45.2	62.7	80.2	97.7	115	132	151	151	---
12 x 8	177.8	7	152	6	7.0	C _V	27.2	54.4	81.6	109	136	163	190	218	245	272	0.98
						K _V	23.5	47.1	70.6	94.3	118	141	164	189	212	235	---
1. The first number indicates both body inlet and outlet size. The second number indicates effective trim size. 2. Valves should not be required to throttle at a C _V less than the specified minimum C _V for an extended period of time. Erosion damage to the valve seats may result. 3. At 100% travel. 4. This construction has an internal cage spacer and load ring. 5. This construction has a load ring.																	

Notes: All other EWT flow coefficients are identical to the EWD. Refer to the EWD information. For additional EWT valve body, information refer to Bulletin 51.1:EW.



The EWT-C has flow coefficients identical to the NPS 6 x 4 through 12 x 6 CL150-600 EWD. Please refer to those coefficients. For additional EWT-C valve information, please refer to Bulletin 51.1:easy-e™ Cryogenic.

The EWT-1 valve has flow coefficients identical to the EWD-1 valve. Refer to the EWD-1 information. For additional EWT-1 valve body information refer to Bulletin 51.1:EW.

CL300, 600, & 900--Flow Up																	Linear Characteristic
Valve Size, NPS ⁽¹⁾	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel											X _T at Max. Travel
	mm	Inches	mm	Inches		Minimum ⁽²⁾	10	20	30	40	50	60	70	80	90	100	
A1 & A3 ΔP/P ₁ ≤ 0.6																	
12 x 8	196.8	7.75	203	8	C _V	22.4	138	315	523	665	801	897	962	1001	1008	1013	0.690
					K _V	19.4	119	272	452	575	693	776	832	866	872	876	- - -
					X _T	- - -	0.564	0.453	0.377	0.411	0.424	0.464	0.535	0.621	0.713	0.690	- - -
B1 & B3 ΔP/P ₁ ≤ 0.75																	
12 x 8	196.8	7.75	203	8	C _V	16.6	77.0	154	231	308	385	462	539	616	693	770	0.563
					K _V	14.4	66.6	133	200	266	333	400	466	533	599	666	- - -
C1 & C3 ΔP/P ₁ ≤ 0.85																	
12 x 8	196.8	7.75	203	8	C _V	15.4	54.3	109	163	217	272	326	380	435	489	543	0.563
					K _V	13.3	47.0	94.3	141	188	235	282	329	376	423	470	- - -
D1 & D3 ΔP/P ₁ ≤ 0.99																	
12 x 8	196.8	6.75	203	8	C _V	13.6	46.3	92.7	139	185	232	278	324	371	417	463	0.563
					K _V	11.8	40.0	80.2	120.2	160	201	240	280	321	361	400	- - -

CL900 - Flow Up																	Linear Characteristic
A1 ΔP/P ₁ ≤ 0.6																	
8 x 6	136.5	5.375	127	5	C _V	2.43	49.1	110	171	232	294	346	391	423	449	469	0.766
					K _V	2.10	42.5	95.2	148	201	254	299	338	366	388	406	- - -
A3 ΔP/P ₁ ≤ 0.6																	
8 x 6	136.5	5.375	127	5	C _V	2.44	37.6	85.6	134	181	230	277	319	359	394	420	0.757
					K _V	2.11	32.5	74.0	116	157	199	240	276	311	341	363	- - -
B3 ΔP/P ₁ ≤ 0.75 ⁽³⁾																	
8 x 6	136.5	5.375	127	5	C _V	2.83	33.0	69.3	106	142	178	215	251	288	324	353	0.563
					K _V	2.45	28.5	59.9	91.7	123	154	186	217	249	280	305	- - -
C3 ΔP/P ₁ ≤ 0.85 ⁽³⁾																	
8 x 6	136.5	5.375	127	5	C _V	2.98	19.1	43.9	67.0	93.0	118	143	167	190	220	239	0.508
					K _V	2.58	16.5	38.0	58.0	80.4	102	124	144	164	190	207	- - -
D3 ΔP/P ₁ ≤ 0.99 ^(3, 4)																	
8 x 6	136.5	5.375	127	5	C _V	3.04	10.5	21.7	46.8	71.4	95.4	120	144	169	194	215	0.490
					K _V	2.63	9.08	18.8	40.5	61.8	82.5	104	125	146	168	186	- - -

1. The first number indicates both inlet and outlet size. The second number indicates nominal port size.

2. Valves should not be required to throttle at less than the specified minimum coefficient for an extended period of time or erosion damage to the valve seat may result.

3. Levels B1, C1, and D1 are not available in CL900 NPS 8 x 6 EWND valve body.

4. Equal percentage for first 1.5 inch of travel, then linear.

1. The first number indicates both inlet and outlet size. The second number indicates nominal port size.
2. Valves should not be required to throttle at less than the specified minimum coefficient for an extended period of time or erosion damage to the valve seat may result.
3. Levels B1, C1, and D1 are not available in CL900 NPS 8 x 6 EWND valve body.
4. Equal percentage for first 1.5 inch of travel, then linear.

The coefficients shown on this page are also appropriate for CL300, 600, and 900 Fisher EWNT-2 and CL900 EWNT-1.



This page is intentionally left blank

Catalog 12

December 2008 - Page EZ-1

Quick Opening Valve Plug
Flow Up through the Port

Quick Opening -- Flow Up																Quick Opening Characteristic		
Valve Size, NPS	Port Diameter		Maximum Travel ⁽¹⁾		Flow Coeffi- cient	Coeffs. for 6 mm (0.25 Inch) Travel ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾	
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
1/2	25.4	1	19	0.75	C _V	---	1.76	3.29	4.29	4.44	4.44	4.44	4.44	4.44	4.44	4.44	0.83	
					K _V	---	1.52	2.85	3.71	3.84	3.84	3.84	3.84	3.84	3.84	3.84	---	
					X _T	---	0.364	0.649	0.764	0.863	0.894	0.894	0.894	0.894	0.894	0.894	---	
3/4	25.4	1	19	0.75	C _V	---	3.85	7.19	9.40	9.72	9.72	9.72	9.72	9.72	9.72	9.72	0.88	
					K _V	---	3.33	6.22	8.13	8.41	8.41	8.41	8.41	8.41	8.41	8.41	8.41	---
					X _T	---	0.314	0.559	0.654	0.742	0.769	0.769	0.769	0.769	0.769	0.769	0.769	---
1	25.4	1	19	0.75	C _V	14.7	4.39	10.3	14.0	15.5	16.2	16.6	16.8	16.8	16.9	16.9	0.94	
					K _V	12.7	3.80	8.91	12.1	13.4	14.0	14.4	14.5	14.5	14.6	14.6	---	
					X _T	14.7	0.400	0.449	0.523	0.539	0.535	0.512	0.500	0.500	0.494	0.494	---	
					F _d	---	0.20	0.29	0.39	0.48	0.50	0.50	0.50	0.50	0.50	0.50	0.50	---
1-1/2	38.1	1.5	19	0.75	C _V	22.6	5.64	11.9	20.6	27.4	30.5	32.4	33.4	33.7	34.1	34.2	0.96	
					K _V	19.5	4.88	10.3	17.8	23.7	26.4	28.0	28.9	29.2	29.5	29.6	---	
					X _T	22.6	0.623	0.734	0.726	0.814	0.843	0.857	0.861	0.860	0.853	0.848	---	
					F _d	---	0.16	0.24	0.32	0.39	0.45	0.50	0.50	0.50	0.50	0.50	0.50	---
	25.4 ⁽⁴⁾	1 ⁽⁴⁾	19	0.75	C _V	15.7	4.17	8.94	14.6	17.4	18.3	18.8	18.9	19.0	19.1	19.4	0.90	
					K _V	13.6	3.61	7.73	12.6	15.1	15.8	16.3	16.3	16.4	16.5	16.8	---	
					X _T	15.7	0.617	0.791	0.793	0.904	0.925	0.924	0.922	0.915	0.905	0.878	---	
2	50.8	2	29	1.125	C _V	34.0	13.0	30.1	44.3	52.4	56.4	57.8	58.4	58.5	58.6	58.6	0.94	
					K _V	29.4	11.2	26.0	38.3	45.3	48.8	50.0	50.5	50.6	50.7	50.7	---	
					X _T	34.0	0.548	0.663	0.765	0.813	0.818	0.833	0.831	0.836	0.834	0.834	---	
					F _d	---	0.17	0.28	0.36	0.43	0.49	0.50	0.50	0.50	0.50	0.50	0.50	---
	25.4 ⁽⁴⁾	1 ⁽⁴⁾	19	0.75	C _V	15.8	4.35	9.79	14.9	16.6	17.3	17.5	17.5	17.6	17.7	17.9	0.86	
					K _V	13.7	3.76	8.47	12.9	14.4	15.0	15.1	15.1	15.2	15.3	15.5	---	
					X _T	15.8	0.524	0.594	0.695	0.877	0.937	0.944	0.958	0.952	0.942	0.921	---	
3	76.2	3	38	1.5	C _V	53.8	30.8	65.1	92.4	110	118	123	126	128	129	129	0.91	
					K _V	46.5	26.6	56.3	79.9	95.2	102	106	109	111	112	112	---	
					X _T	53.8	0.672	0.714	0.713	0.742	0.784	0.785	0.783	0.776	0.774	0.774	---	
					F _d	---	0.17	0.27	0.35	0.42	0.47	0.50	0.50	0.50	0.50	0.50	0.50	---
	50.8 ⁽⁴⁾	2 ⁽⁴⁾	29	1.125	C _V	32.2	9.99	27.6	44.9	61.0	71.9	78.4	83.1	86.2	87.5	88.4	0.95	
					K _V	27.9	8.64	23.9	38.8	52.8	62.2	67.8	71.9	74.6	75.7	76.5	---	
					X _T	32.2	0.527	0.511	0.652	0.720	0.780	0.820	0.814	0.798	0.790	0.779	---	
4	101.6	4	51	2	C _V	68.2	50.8	116	159	185	201	212	219	222	223	223	0.88	
					K _V	59.0	43.9	100	138	160	174	183	189	192	193	193	---	
					X _T	68.2	0.733	0.653	0.724	0.805	0.809	0.816	0.809	0.812	0.831	0.835	---	
					F _d	---	0.18	0.28	0.36	0.42	0.48	0.50	0.50	0.50	0.50	0.50	0.50	---
	50.8 ⁽⁴⁾	2 ⁽⁴⁾	29	1.125	C _V	37.4	13.5	32.3	52.2	66.2	74.4	81.1	85.0	85.8	86.3	86.7	0.85	
					K _V	32.4	11.7	27.9	45.2	57.3	64.4	70.2	73.5	74.2	74.6	75.0	---	
					X _T	37.4	0.490	0.556	0.609	0.672	0.793	0.772	0.728	0.714	0.711	0.704	---	
1. When using 655-EZ as a control valve for on-off service, the maximum travel for sizing purposes is 19 mm (0.75 inch). 2. When sizing self-operated regulators, use coefficients listed for 6 mm (0.25 inch) travel. 3. At 100% travel. 4. Restricted trim.																		

The flow coefficients shown on this page are appropriate for EZ-C valves.



Linear -- Flow Up															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	25.4	1	19	0.75	C _V	2.21	3.87	5.29	6.56	8.2	9.82	11.1	12.1	13.0	13.6	0.96
					K _V	1.91	3.35	4.58	5.67	7.09	8.49	9.60	10.5	11.2	11.8	---
					X _T	0.638	0.601	0.638	0.634	0.638	0.629	0.636	0.680	0.769	0.834	---
1-1/2	38.1	1.5	19	0.75	C _V	3.99	7.53	11.1	14.8	18.7	22.5	25.8	29.2	31.2	31.9	0.96
					K _V	3.45	6.51	9.6	12.8	16.2	19.5	22.3	25.3	27.0	27.6	---
					X _T	0.633	0.651	0.657	0.691	0.674	0.674	0.696	0.704	0.757	0.818	---
	25.4 ⁽²⁾	1 ⁽²⁾	19	0.75	C _V	1.96	3.42	4.94	6.11	7.8	9.3	10.9	13	15.1	16.7	0.96
					K _V	1.70	2.96	4.27	5.29	6.75	8.04	9.43	11.2	13.1	14.4	---
					X _T	0.469	0.578	0.600	0.690	0.652	0.655	0.637	0.625	0.719	0.796	---
2	50.8	2	29	1.125	C _V	6.08	11.9	18.0	24.1	30.1	36.4	42.8	49.9	52.0	52.4	0.95
					K _V	5.26	10.3	15.6	20.8	26.0	31.5	37.0	43.2	45.0	45.3	---
					X _T	0.560	0.644	0.655	0.675	0.701	0.724	0.779	0.773	0.862	0.924	---
	25.4 ⁽²⁾	1 ⁽²⁾	19	0.75	C _V	1.88	3.41	4.95	6.49	8.06	9.67	11.23	12.79	14.35	15.7	0.94
					K _V	1.63	2.95	4.28	5.61	6.97	8.36	9.71	11.1	12.4	13.6	---
					X _T	0.609	0.593	0.597	0.624	0.621	0.626	0.642	0.633	0.750	0.910	---
3	76.2	3	38	1.5	C _V	15.4	29.6	43.4	58.3	71.8	83.9	93.8	103	108	110.4	0.92
					K _V	13.3	25.6	37.5	50.4	62.1	72.6	81.1	89.1	93.4	95.5	---
					X _T	0.622	0.642	0.692	0.691	0.690	0.721	0.759	0.788	0.839	0.888	---
	50.8 ⁽²⁾	2 ⁽²⁾	29	1.125	C _V	6.59	13.3	20.7	28.1	36.0	44.0	55.6	67.5	76.2	80.4	0.94
					K _V	5.70	11.5	17.9	24.3	31.1	38.1	48.1	58.4	65.9	69.5	---
					X _T	0.564	0.500	0.522	0.609	0.577	0.594	0.563	0.582	0.677	0.749	---
4	101.6	4	51	2	C _V	21.3	39.7	57.5	75.8	100	129	157	180	199	209	0.89
					K _V	18.4	34.3	49.7	65.6	86.5	112	136	156	172	181	---
					X _T	0.554	0.628	0.684	0.723	0.665	0.608	0.677	0.826	0.862	0.866	---
	50.8 ⁽²⁾	2 ⁽²⁾	29	1.125	C _V	6.16	12.8	20.0	27.8	36.1	45.1	58.8	67.5	78.8	86.8	0.90
					K _V	5.33	11.1	17.3	24.0	31.2	39.0	50.9	58.4	68.2	75.1	---
					X _T	0.740	0.644	0.642	0.619	0.602	0.605	0.552	0.614	0.644	0.736	---

1. At 100% travel.
2. Restricted trim.

Notes: The coefficients shown on this page are also appropriate for EZ-C valves.

Catalog 12

December 2008 - Page EZ-3

Equal Percentage Valve Plug
Flow Up through the Port

Equal Percentage -- Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	25.4	1	19	0.75	C _V	0.79	1.25	1.80	2.53	3.63	5.28	7.59	10.7	12.7	13.2	0.96
					K _V	0.683	1.08	1.56	2.19	3.14	4.57	6.57	9.26	11.0	11.4	---
					X _T	0.641	0.634	0.598	0.586	0.584	0.596	0.646	0.680	0.757	0.886	---
					F _d	0.091	0.11	0.13	0.16	0.19	0.24	0.30	0.37	0.43	0.50	---
1-1/2	38.1	1.5	19	0.75	C _V	0.795	1.23	1.91	2.95	4.30	6.46	9.84	16.4	22.2	28.1	0.97
					K _V	0.688	1.06	1.65	2.55	3.72	5.59	8.51	14.2	19.2	24.3	---
					X _T	0.726	0.676	0.733	0.645	0.589	0.558	0.597	0.653	0.777	0.840	---
					F _d	0.077	0.086	0.10	0.12	0.15	0.17	0.22	0.27	0.34	0.40	---
	25.4 ⁽²⁾	1 ⁽²⁾	19	0.75	C _V	0.770	1.23	1.78	2.58	3.67	5.54	8.30	12.0	15.1	17.3	0.98
					K _V	0.666	1.06	1.54	2.23	3.17	4.79	7.18	10.4	13.1	15.0	---
2	50.8	2	29	1.125	C _V	1.65	2.61	4.30	6.62	11.1	20.7	32.8	44.7	50.0	53.8	0.95
					K _V	1.43	2.26	3.72	5.73	9.60	17.9	28.4	38.7	43.3	46.5	---
					X _T	0.655	0.581	0.520	0.559	0.552	0.529	0.653	0.801	0.903	0.899	---
					F _d	0.069	0.085	0.11	0.13	0.18	0.23	0.30	0.37	0.44	0.50	---
	25.4 ⁽²⁾	1 ⁽²⁾	19	0.75	C _V	1.02	1.50	2.05	2.78	3.90	5.57	8.16	11.8	14.5	15.9	0.92
					K _V	0.882	1.30	1.77	2.40	3.37	4.82	7.06	10.2	12.5	13.8	---
					X _T	0.596	0.616	0.600	0.580	0.572	0.555	0.523	0.547	0.671	0.905	---
					F _d	0.062	0.081	0.10	0.12	0.16	0.20	0.26	0.33	0.40	0.46	---
3	76.2	3	38	1.5	C _V	3.11	5.77	9.12	13.7	21.7	36.0	60.4	86.4	104	114	0.92
					K _V	2.69	4.99	7.89	11.9	18.8	31.1	52.2	74.7	90.0	98.6	---
					X _T	0.619	0.595	0.598	0.619	0.594	0.563	0.586	0.729	0.778	0.781	---
					F _d	0.062	0.081	0.10	0.12	0.16	0.20	0.26	0.33	0.40	0.46	---
	50.8 ⁽²⁾	2 ⁽²⁾	29	1.125	C _V	2.11	3.11	4.58	6.76	10.7	20.7	34.3	48.3	61.5	71.6	0.92
					K _V	1.83	2.69	3.96	5.85	9.26	17.9	29.7	41.8	53.2	61.9	---
4	101.6	4	51	2	C _V	4.90	8.19	13.5	20.1	31.2	52.6	96.7	140	170	190	0.90
					K _V	4.24	7.08	11.7	17.4	27.0	45.5	83.6	121	147	164	---
					X _T	0.594	0.573	0.560	0.568	0.572	0.564	0.532	0.707	0.807	0.834	---
					F _d	0.052	0.065	0.080	0.10	0.13	0.17	0.23	0.31	0.38	0.44	---
	50.8 ⁽²⁾	2 ⁽²⁾	29	1.125	C _V	1.96	3.05	4.43	6.98	11.9	22.3	36.7	50.9	61.8	72.7	0.92
					K _V	1.70	2.64	3.83	6.04	10.3	19.3	31.7	44.0	53.5	62.9	---
					X _T	0.619	0.575	0.624	0.610	0.678	0.639	0.646	0.673	0.778	0.781	---
					F _d	0.052	0.065	0.080	0.10	0.13	0.17	0.23	0.31	0.38	0.44	---

1. At 100% travel.
2. Restricted trim.

Notes: The coefficients shown on this page are appropriate for EZ-C valves.



Micro-Form--Flow Up																Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		5	10	20	30	40	50	60	70	80	90	100	
All Sizes 1/2 - 2	6.4	0.25	19	0.75	C _V	0.075	0.088	0.124	0.175	0.236	0.327	0.464	0.641	0.881	1.22	1.52	0.88
					K _V	0.065	0.076	0.107	0.151	0.204	0.283	0.401	0.554	0.762	1.06	1.31	---
					X _T	0.804	0.771	0.717	0.658	0.645	0.620	0.585	0.596	0.596	0.603	0.647	---
1/2	9.5	0.375	19	0.75	C _V	0.102	0.134	0.202	0.313	0.448	0.613	0.879	1.27	1.77	2.47	3.00	0.93
					K _V	0.088	0.116	0.175	0.271	0.388	0.530	0.760	1.10	1.53	2.14	2.59	---
					X _T	0.766	0.711	0.679	0.618	0.602	0.588	0.564	0.580	0.599	0.593	0.723	---
	12.7	0.5	19	0.75	C _V	0.137	0.193	0.324	0.496	0.737	1.07	1.52	2.13	2.93	3.89	4.52	0.94
					K _V	0.119	0.167	0.280	0.429	0.638	0.926	1.31	1.84	2.53	3.36	3.91	---
3/4	9.5	0.375	19	0.75	X _T	0.739	0.689	0.631	0.595	0.603	0.602	0.592	0.604	0.636	0.687	0.754	---
					C _V	0.101	0.131	0.205	0.312	0.446	0.618	0.882	1.28	1.80	2.45	3.03	0.93
					K _V	0.087	0.113	0.177	0.270	0.386	0.535	0.763	1.11	1.56	2.12	2.62	---
	12.7	0.5	19	0.75	X _T	0.807	0.751	0.642	0.655	0.616	0.597	0.603	0.601	0.607	0.650	0.736	---
					C _V	0.133	0.190	0.318	0.486	0.732	1.07	1.52	2.15	3.07	4.20	5.06	0.94
					K _V	0.115	0.164	0.275	0.420	0.633	0.926	1.31	1.86	2.66	3.63	4.38	---
	19.1	0.75	19	0.75	X _T	0.780	0.720	0.655	0.628	0.606	0.598	0.598	0.596	0.596	0.636	0.722	---
					C _V	0.276	0.373	0.617	0.948	1.44	2.14	3.10	4.43	6.14	7.58	8.35	0.87
					K _V	0.239	0.323	0.534	0.820	1.25	1.85	2.68	3.83	5.31	6.56	7.22	---
1	9.5	0.375	19	0.75	X _T	0.734	0.702	0.618	0.634	0.605	0.607	0.646	0.670	0.699	0.730	0.693	---
					C _V	0.099	0.129	0.199	0.308	0.448	0.620	0.882	1.29	1.80	2.43	3.07	0.89
					K _V	0.086	0.112	0.172	0.266	0.388	0.536	0.763	1.12	1.56	2.10	2.66	---
	12.7	0.5	19	0.75	X _T	0.795	0.747	0.663	0.641	0.593	0.569	0.568	0.560	0.571	0.624	0.662	---
					C _V	0.133	0.189	0.319	0.492	0.735	1.08	1.53	2.12	2.99	4.17	4.91	0.93
					K _V	0.115	0.163	0.276	0.426	0.636	0.934	1.32	1.83	2.59	3.61	4.25	---
	19.1	0.75	19	0.75	X _T	0.787	0.728	0.639	0.628	0.591	0.573	0.585	0.600	0.618	0.645	0.803	---
					C _V	0.276	0.374	0.622	0.965	1.47	2.17	3.15	4.57	6.52	8.17	8.84	0.97
					K _V	0.239	0.324	0.538	0.835	1.27	1.88	2.72	3.95	5.64	7.07	7.65	---
1-1/2 and 2	9.5	0.375	19	0.75	X _T	0.723	0.687	0.614	0.588	0.560	0.571	0.596	0.603	0.624	0.750	0.919	---
					C _V	0.096	0.121	0.190	0.302	0.435	0.600	0.864	1.26	1.80	2.56	3.20	0.84
					K _V	0.083	0.105	0.164	0.261	0.376	0.519	0.747	1.09	1.56	2.21	2.77	---
	12.7	0.5	19	0.75	X _T	0.923	0.915	0.763	0.699	0.657	0.640	0.624	0.608	0.596	0.594	0.648	---
					C _V	0.145	0.199	0.323	0.503	0.735	1.07	1.54	2.14	3.08	4.36	5.18	0.91
					K _V	0.125	0.172	0.279	0.435	0.636	0.926	1.33	1.85	2.66	3.77	4.48	---
	19.1	0.75	19	0.75	X _T	0.851	0.748	0.686	0.640	0.617	0.627	0.602	0.607	0.607	0.573	0.705	---
					C _V	0.336	0.434	0.683	1.00	1.49	2.21	3.18	4.61	6.73	8.88	10.2	0.92
					K _V	0.291	0.375	0.591	0.865	1.29	1.91	2.75	3.99	5.82	7.68	8.82	---
					X _T	0.784	0.747	0.625	0.636	0.596	0.578	0.603	0.593	0.591	0.680	0.796	---
1. At 100% travel.																	

1. At 100% travel.

Notes: The coefficients on this page are also appropriate for EZ-C valves.

Catalog 12

December 2008 - Page EZ-5

Micro-Flute and Micro-Flow Valve Plugs
Flow Up through the Port

Micro-Flute--Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
All Sizes 1/2 - 2	6.4 1 Flute	0.25 1 Flute	19	0.75	C _V	0.0385	0.0455	0.0560	0.0719	0.0942	0.124	0.162	0.212	0.278	0.354	0.87
					K _V	0.033	0.039	0.048	0.062	0.081	0.107	0.140	0.183	0.240	0.306	---
					X _T	0.778	0.734	0.690	0.653	0.642	0.635	0.637	0.634	0.632	0.656	---
	6.4 3 Flutes	0.25 3 Flutes	19	0.75	C _V	0.0562	0.0725	0.101	0.146	0.216	0.312	0.433	0.588	0.802	1.07	0.90
					K _V	0.049	0.063	0.087	0.126	0.187	0.270	0.375	0.509	0.694	0.926	---
					X _T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624	---

1. At 100% travel.

Micro-Flow--Flow Up															Equal Percentage Characteristic		
Valve Size, NPS	Port Diameter		Maximum Travel		Angle “A” of Flat	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
All Sizes 1/2 - 2	4.8	0.1875	19	0.75	1°55'	C _V	0.015	0.020	0.024	0.028	0.034	0.041	0.048	0.056	0.066	0.075	0.89
						K _V	0.013	0.017	0.021	0.024	0.029	0.035	0.042	0.048	0.057	0.065	---
						X _T	0.964	0.888	0.906	0.947	0.942	0.928	0.949	0.947	0.918	0.934	---
					3°25'	C _V	0.016	0.026	0.038	0.052	0.070	0.088	0.107	0.127	0.153	0.181	0.84
						K _V	0.014	0.022	0.033	0.045	0.061	0.076	0.093	0.110	0.132	0.157	---
						X _T	0.707	0.697	0.687	0.700	0.675	0.679	0.680	0.680	0.681	0.681	---
1. At 100% travel.																	

1. At 100% travel.



Catalog 12December 2008 - Page EZ-6

The EZ-C has flow coefficients identical to the EZ. Please refer to those coefficients. For additional EZ-C valve information, please refer to Bulletin 51.1:easy-e[®] Cryogenic.

Catalog 12

November 2010 - Page FB-1

Whisper Trim™ III Cage

Level A [Maximum $\Delta P/P_1$ (psia) = 0.60]

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter		mm	171	197	252	275	352	430	506	
		Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375	
Recommended Actuator	Plug Travel		Whisper III Level A1, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	522	600	*	*	*	*	*	0.647
585C	127	5	653	759	972	*	*	*	*	0.647
	152	6	756	888	1150	1270	*	*	*	0.647
	178	7	853	1000	1310	1450	*	*	*	0.647
	203	8	938	1110	1470	1630	*	*	*	0.647
585C Long Stroke	225	8.875	981	1170	1590	1770	2340	*	*	0.647
	251	9.875	1070	1280	1730	1930	2560	*	*	0.647
	276	10.875	-----	1375	1880	2100	2810	3500	4220	0.647
	302	11.875	-----	1440	1990	2240	3020	3780	4530	0.647
	327	12.875	-----	1500	2100	2370	3220	4030	4880	0.647
	352	13.875	-----	-----	2200	2490	3410	4310	5190	0.647
	378	14.875	-----	-----	2300	2600	3560	4530	5500	0.647
	403	15.875	-----	-----	-----	-----	3750	4780	5810	0.647
	429	16.875	-----	-----	-----	-----	3910	5000	6090	0.647
	454	17.875	-----	-----	-----	-----	4090	5250	6410	0.647
	479	18.875	-----	-----	-----	-----	4220	5470	6690	0.647
	505	19.875	-----	-----	-----	-----	-----	5660	6970	0.647
	530	20.875	-----	-----	-----	-----	-----	5840	7220	0.647
	556	21.875	-----	-----	-----	-----	-----	6030	7470	0.647
	581	22.875	-----	-----	-----	-----	-----	6190	7690	0.647
	606	23.875	-----	-----	-----	-----	-----	6375	7940	0.647
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			26.1	29.7	37	40.4	51.2	62.0	72.8	0.550

(*) Consult factory for flow at lower travels.



Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter		mm	171	197	252	275	352	430	506	
		Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375	
Recommended Actuator	Plug Travel		Whisper III Level A3, Linear Characteristic, C _V Flow Coefficients							
	mm	Inches								
667/657	102	4	528	613	*	*	*	(1)	(1)	0.647
585C	127	5	644	750	981	*	*	(1)	(1)	0.647
	152	6	750	878	1160	1260	*	(1)	(1)	0.647
	178	7	847	997	1330	1440	*	(1)	(1)	0.647
	203	8	931	1100	1480	1620	*	(1)	(1)	0.647
585C Long Stroke	225	8.875	981	1200	1620	1770	2340	(1)	(1)	0.647
	251	9.875	1070	1280	1760	1930	2560	(1)	(1)	0.647
	276	10.875	-----	1370	1900	2090	2790	(1)	(1)	0.647
	302	11.875	-----	1440	2020	2230	3000	(1)	(1)	0.647
	327	12.875	-----	1500	2130	2360	3190	(1)	(1)	0.647
	352	13.875	-----	-----	2230	2480	3380	(1)	(1)	0.647
	378	14.875	-----	-----	2320	2590	3560	(1)	(1)	0.647
	403	15.875	-----	-----	-----	-----	3750	(1)	(1)	0.647
	429	16.875	-----	-----	-----	-----	3910	(1)	(1)	0.647
	454	17.875	-----	-----	-----	-----	4060	(1)	(1)	0.647
	479	18.875	-----	-----	-----	-----	4220	(1)	(1)	0.647
	505	19.875	-----	-----	-----	-----	-----	(1)	(1)	0.647
	530	20.875	-----	-----	-----	-----	-----	(1)	(1)	0.647
	556	21.875	-----	-----	-----	-----	-----	(1)	(1)	0.647
	581	22.875	-----	-----	-----	-----	-----	(1)	(1)	0.647
	606	23.875	-----	-----	-----	-----	-----	(1)	(1)	0.647
	Min Throttling, Beveled Seat Plug			57.8	81.4	125	141	229	(1)	(1)
Min Throttling, Radius Plug			20.5	23.3	29.2	31.8	40.4	(1)	(1)	0.550
1. Whisper A3 is not available in these sizes. Whisper A2 is available, consult your Emerson Process Management sales office for details. (*) Consult factory for flow at lower travels.										

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter		mm	171	197	252	275	352	430	506	
		Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375	
Recommended Actuator	Plug Travel		Whisper III Level B1, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	334	366	*	*	*	*	*	0.647
585C	127	5	422	463	581	*	*	*	*	0.647
	152	6	503	559	703	*	*	*	*	0.647
	178	7	578	647	828	*	*	*	*	0.647
	203	8	650	731	944	1050	*	*	*	0.647
585C Long Stroke	225	8.875	706	897	1030	1150	1410	*	*	0.647
	251	9.875	769	1000	1140	1270	1575	*	*	0.647
	276	10.875	-----	1090	1240	1380	1730	2180	2520	0.647
	302	11.875	-----	1160	1340	1490	1880	2380	2760	0.647
	327	12.875	-----	1230	1430	1600	2030	2580	3000	0.647
	352	13.875	-----	-----	1530	1700	2170	2770	3250	0.647
	378	14.875	-----	-----	1620	1810	2310	2950	3470	0.647
	403	15.875	-----	-----	-----	-----	2440	3120	3690	0.647
	429	16.875	-----	-----	-----	-----	2570	3310	3910	0.647
	454	17.875	-----	-----	-----	-----	2700	3470	4130	0.647
	479	18.875	-----	-----	-----	-----	2830	3660	4340	0.647
	505	19.875	-----	-----	-----	-----	-----	3810	4530	0.647
	530	20.875	-----	-----	-----	-----	-----	3970	4720	0.647
	556	21.875	-----	-----	-----	-----	-----	4090	4910	0.647
	581	22.875	-----	-----	-----	-----	-----	4250	5090	0.647
606	23.875	-----	-----	-----	-----	-----	4410	5280	0.647	
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			23.1	25.9	32.4	35.6	44.5	50.8	63.8	0.550
(*) Consult factory for flow at lower travels.										

FBD and FBT

Whisper Trim™ III Cage

Level B [Maximum $\Delta P/P_1(\text{psia}) = 0.75$]

Catalog 12

November 2010 - Page FB-4

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, In			8	10	12	12	16	20	24	
Nominal Outlet Size, In			12	16	18	20	24	30	36	
Port Diameter		mm	171	197	252	275	352	430	506	
		Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375	
Recommended Actuator	Plug Travel		Whisper III Level B3, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	334	366	*	*	*	*	*	0.647
585C	127	5	422	463	581	*	*	*	*	0.647
	152	6	497	553	694	*	*	*	*	0.647
	178	7	572	641	819	*	*	*	*	0.647
	203	8	644	722	934	1040	*	*	*	0.647
585C Long Stroke	225	8.875	706	797	1030	1150	1440	*	*	0.647
	251	9.875	769	872	1140	1270	1610	*	*	0.647
	276	10.875	-----	947	1240	1380	1780	2180	2520	0.647
	302	11.875	-----	1010	1330	1480	1910	2370	2740	0.647
	327	12.875	-----	1080	1430	1590	2060	2570	2980	0.647
	352	13.875	-----	-----	1520	1700	2200	2750	3220	0.647
	378	14.875	-----	-----	1610	1800	2340	2930	3470	0.647
	403	15.875	-----	-----	-----	-----	2480	3130	3690	0.647
	429	16.875	-----	-----	-----	-----	2620	3280	3910	0.647
	454	17.875	-----	-----	-----	-----	2740	3470	4090	0.647
	479	18.875	-----	-----	-----	-----	2870	3625	4310	0.647
	505	19.875	-----	-----	-----	-----	-----	3780	4500	0.647
	530	20.875	-----	-----	-----	-----	-----	3970	4720	0.647
	556	21.875	-----	-----	-----	-----	-----	4090	4910	0.647
	581	22.875	-----	-----	-----	-----	-----	4250	5090	0.647
	606	23.875	-----	-----	-----	-----	-----	4410	5280	0.647
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			19.0	21.4	26.7	29.4	37.2	43.5	52.9	0.550
(*) Consult factory for flow at lower travels.										

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter	mm	171	197	252	275	352	430	506		
	Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375		
Recommended Actuator	Plug Travel		Whisper III Level C1, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	199	224	*	*	*	*	*	0.647
585C	127	5	254	286	*	*	*	*	*	0.647
	152	6	298	334	447	*	*	*	*	0.647
	178	7	353	397	531	*	*	*	*	0.647
	203	8	409	459	613	663	*	*	*	0.647
585C Long Stroke	225	8.875	447	509	678	734	953	*	*	0.647
	251	9.875	494	569	763	825	1060	*	*	0.647
	276	10.875	-----	613	828	897	1170	1460	1680	0.647
	302	11.875	-----	666	906	988	1270	1590	1830	0.647
	327	12.875	-----	716	981	1070	1380	1730	1980	0.647
	352	13.875	-----	-----	1050	1150	1490	1860	2140	0.647
	378	14.875	-----	-----	1120	1230	1590	1990	2290	0.647
	403	15.875	-----	-----	-----	-----	1700	2130	2440	0.647
	429	16.875	-----	-----	-----	-----	1790	2260	2600	0.647
	454	17.875	-----	-----	-----	-----	1890	2390	2750	0.647
	479	18.875	-----	-----	-----	-----	1960	2530	2900	0.647
	505	19.875	-----	-----	-----	-----	-----	2640	3060	0.647
	530	20.875	-----	-----	-----	-----	-----	2760	3210	0.647
	556	21.875	-----	-----	-----	-----	-----	2880	3360	0.647
	581	22.875	-----	-----	-----	-----	-----	3000	3520	0.647
	606	23.875	-----	-----	-----	-----	-----	3080	3610	0.647
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			20.8	23.7	30.1	32.9	41.5	50.8	59.3	0.550
(*) Consult factory for flow at lower travels.										

FBD and FBT

Whisper Trim™ III Cage

Level C [Maximum $\Delta P/P_{1(\text{psia})} = 0.85$]

Catalog 12

November 2010 - Page FB-6

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter		mm	171	197	252	275	352	430	506	
		Inches	6.75	7.75	9.9375	10.8125	13.875	16.9375	19.9375	
Recommended Actuator	Plug Travel		Whisper III Level C3, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	205	229	*	*	*	*	*	0.647
585C	127	5	264	295	*	*	*	*	*	0.647
	152	6	316	353	447	*	*	*	*	0.647
	178	7	375	419	531	*	*	*	*	0.647
	203	8	425	478	606	656	*	*	*	0.647
585C Long Stroke	225	8.875	466	531	672	728	922	*	*	0.647
	251	9.875	516	591	753	816	1090	*	*	0.647
	276	10.875	-----	647	838	906	1150	1390	1600	0.647
	302	11.875	-----	697	906	988	1250	1520	1750	0.647
	327	12.875	-----	750	981	1070	1370	1660	1910	0.647
	352	13.875	-----	-----	1040	1140	1470	1780	2050	0.647
	378	14.875	-----	-----	1120	1220	1590	1930	2220	0.647
	403	15.875	-----	-----	-----	-----	1700	2060	2370	0.647
	429	16.875	-----	-----	-----	-----	1800	2190	2530	0.647
	454	17.875	-----	-----	-----	-----	1890	2320	2670	0.647
	479	18.875	-----	-----	-----	-----	1990	2460	2830	0.647
	505	19.875	-----	-----	-----	-----	-----	2580	2980	0.647
	530	20.875	-----	-----	-----	-----	-----	2700	3130	0.647
	556	21.875	-----	-----	-----	-----	-----	2820	3280	0.647
	581	22.875	-----	-----	-----	-----	-----	2930	3430	0.647
	606	23.875	-----	-----	-----	-----	-----	3080	3610	0.647
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			18.0	20.5	25.6	28.1	35.7	43.3	50.7	0.550

(*) Consult factory for flow at lower travels.

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter	mm	132	171	197	224	275	378	430		
	Inches	5.1875	6.75	7.75	8.8125	10.8125	14.875	16.9375		
Recommended Actuator	Plug Travel		Whisper III Level D1, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	149	199	*	*	*	*	*	0.647
585C	127	5	191	254	*	*	*	*	*	0.647
	152	6	224	298	334	*	*	*	*	0.647
	178	7	262	353	397	*	*	*	*	0.647
	203	8	298	409	459	613	*	*	*	0.647
585C Long Stroke	225	8.875	325	447	509	678	775	*	*	0.647
	251	9.875	359	494	569	753	863	*	*	0.647
	276	10.875	-----	531	613	813	947	1240	1460	0.647
	302	11.875	-----	578	666	881	1030	1350	1590	0.647
	327	12.875	-----	622	716	950	1110	1470	1730	0.647
	352	13.875	-----	-----	766	1020	1190	1580	1860	0.647
	378	14.875	-----	-----	816	1080	1270	1690	1990	0.647
	403	15.875	-----	-----	-----	-----	1340	1810	2130	0.647
	429	16.875	-----	-----	-----	-----	1410	1920	2260	0.647
	454	17.875	-----	-----	-----	-----	1480	2030	2390	0.647
	479	18.875	-----	-----	-----	-----	1530	2130	2530	0.647
	505	19.875	-----	-----	-----	-----	-----	2230	2640	0.647
	530	20.875	-----	-----	-----	-----	-----	2320	2760	0.647
	556	21.875	-----	-----	-----	-----	-----	2420	2880	0.647
	581	22.875	-----	-----	-----	-----	-----	2520	3000	0.647
606	23.875	-----	-----	-----	-----	-----	2580	3080	0.647	
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			14.8	20.8	23.7	28.0	32.9	44.3	50.8	0.550
(*) Consult factory for flow at lower travels.										

FBD and FBT

Whisper Trim™ III Cage

Level D [Maximum $\Delta P/P_{1(\text{psia})} = 0.99$]

Catalog 12

November 2010 - Page FB-8

Valve Size, NPS			8 x 12	10 x 16	12 x 18	12 x 20	16 x 24	20 x 30	24 x 36	X _T at Max. Travel
Nominal Inlet Size, Inches			8	10	12	12	16	20	24	
Nominal Outlet Size, Inches			12	16	18	20	24	30	36	
Port Diameter		mm	132	171	197	224	275	378	430	
		Inches	5.1875	6.75	7.75	8.8125	10.8125	14.875	16.9375	
Recommended Actuator	Plug Travel		Whisper III Level D3, Linear Characteristic, C _v Flow Coefficients							
	mm	Inches								
667/657	102	4	157	205	*	*	376	*	497	0.647
585C	127	5	202	264	*	*	452	*	626	0.647
	152	6	242	316	353	*	529	*	755	0.647
	178	7	281	375	419	*	606	*	885	0.647
	203	8	316	425	478	553	682	*	1010	0.647
585C Long Stroke	225	8.875	344	466	531	616	728	*	1140	0.647
	251	9.875	381	516	591	725	863	*	1270	0.647
	276	10.875	-----	566	647	759	907	1220	1390	0.647
	302	11.875	-----	606	697	819	988	1330	1520	0.647
	327	12.875	-----	653	750	881	1070	1450	1660	0.647
	352	13.875	-----	-----	797	938	1140	1560	1780	0.647
	378	14.875	-----	-----	847	1030	1230	1690	1930	0.647
	403	15.875	-----	-----	-----	-----	1300	1800	2060	0.647
	429	16.875	-----	-----	-----	-----	1380	1920	2190	0.647
	454	17.875	-----	-----	-----	-----	1440	2020	2320	0.647
	479	18.875	-----	-----	-----	-----	1510	2130	2460	0.647
	505	19.875	-----	-----	-----	-----	-----	2230	2580	0.647
	530	20.875	-----	-----	-----	-----	-----	2330	2700	0.647
	556	21.875	-----	-----	-----	-----	-----	2430	2820	0.647
	581	22.875	-----	-----	-----	-----	-----	2530	2930	0.647
	606	23.875	-----	-----	-----	-----	-----	2640	3080	0.647
Min Throttling, Bevel Seat Plug			57.8	81.4	125	141	229	346	431	0.550
Min Throttling, Radius Plug			13.5	18.0	20.5	23.1	28.1	38.1	43.3	0.550
(*) Consult factory for flow at lower travels.										

Catalog 12

November 2010 - Page FB-9

WhisperFlo™ Trim
Level X

Valve Size, NPS			8 x 12		X _T at Travel for 8 x 12	10 x 16		X _T at Travel for 10 x 16	12 x 18		X _T at Travel for 12 x 18	12 x 20		X _T at Travel for 12 x 20	16 x 24		X _T at Travel for 16 x 24	20 x 30		X _T at Travel for 20 x 30	24 x 36		X _T at Travel for 24 x 36		
Nominal Inlet Size, Inches			8			10			12			18			20			24			30			36	
Nominal Outlet Size, Inches			12			16			18			20			24			30			36				
Port Diameter			mm	178		178	178		178	279		375	463		463										
			Inches	7.00	7.00	7.00	11.00	14.75	18.25	18.25															
Recommended Actuator	Plug Travel		WhisperFlo Level X, Linear Characteristic, C _v Flow Coefficients																						
	mm	Inches																							
667/657	102	4	450	0.69	450	0.69	450	0.69	698	0.70	930	0.71	1118	0.71	1118	0.71									
585C	127	5	564	0.68	564	0.68	564	0.68	876	0.70	1168	0.71	1403	0.71	1403	0.71									
	152	6	679	0.67	679	0.67	679	0.67	1054	0.69	1405	0.70	1689	0.71	1689	0.71									
	178	7	794	0.66	794	0.66	794	0.66	1232	0.68	1643	0.70	1974	0.70	1974	0.70									
	203	8	909	0.65	909	0.65	909	0.65	1410	0.68	1881	0.69	2260	0.70	2260	0.70									
	225	8.875	1009	0.65	1009	0.65	1009	0.65	1566	0.67	2089	0.69	2510	0.69	2510	0.70									
585C Long Stroke	251	9.875	1124	0.64	1124	0.64	1124	0.64	1744	0.66	2326	0.68	2795	0.69	2795	0.69									
	276	10.875	-----	-----	1239	0.63	1239	0.63	1922	0.66	2564	0.68	3081	0.69	3081	0.69									
	302	11.875	-----	-----	1354	0.62	1354	0.62	2101	0.65	2801	0.68	3366	0.68	3366	0.69									
	327	12.875	-----	-----	1469	0.61	1469	0.61	2279	0.65	3039	0.67	3652	0.68	3652	0.68									
	352	13.875	-----	-----	-----	-----	1583.3	0.60	2457	0.64	3277	0.67	3937	0.68	3937	0.68									
	378	14.875	-----	-----	-----	-----	1698	0.59	2635	0.63	3514	0.66	4223	0.67	4223	0.68									
	403	15.875	-----	-----	-----	-----	-----	-----	-----	-----	3752	0.66	4508	0.67	4508	0.67									
	429	16.875	-----	-----	-----	-----	-----	-----	-----	-----	3989	0.65	4794	0.66	4794	0.67									
	454	17.875	-----	-----	-----	-----	-----	-----	-----	-----	4227	0.65	5079	0.66	5079	0.67									
	479	18.875	-----	-----	-----	-----	-----	-----	-----	-----	4465	0.65	5365	0.65	5365	0.66									
	505	19.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	5650	0.65	5650	0.66									
	530	20.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	5936	0.65	5936	0.65									
	556	21.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	6221	0.65	6221	0.65									
	581	22.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	6507	0.65	6507	0.65									
	606	23.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	6792	0.65	6792	0.64									
	FB Minimum Travel, Inches			0.24	-----	0.24	-----	0.24	-----	0.42	-----	0.40	-----	0.47	-----	0.47	-----								
Min Throttling, Radius Plug			12.9	0.72	12.9	0.72	12.9	0.72	43.3	0.72	60.2	0.72	86.5	0.72	86.5	0.72									



FBD and FBT

WhisperFlo™ Trim
Level Y

Catalog 12
November 2010 - Page FB-10

Valve Size, NPS			8 x 12		10 x 16		12 x 18		12 x 20		16 x 24		20 x 30		24 x 36		
Nominal Inlet Size, Inches			8		X _T at Travel for 8 x 12	10	X _T at Travel for 10 x 16	12	X _T at Travel for 12 x 18	12	X _T at Travel for 12 x 20	16	X _T at Travel for 16 x 24	20	X _T at Travel for 20 x 30	24	X _T at Travel for 24 x 36
Nominal Outlet Size, Inches			12			16		18		20		24		30		36	
Port Diameter		mm	178	8 x 12	178	10 x 16	178	12 x 18	279	12 x 20	375	16 x 24	463	20 x 30	463	24 x 36	
		Inches	7.00		7.00		7.00		11.00		14.75		18.25		18.25		
Recommended Actuator	Plug Travel		WhisperFlo Level Y, Linear Characteristic, C _v Flow Coefficients														
	mm	Inches															
667/657	102	4	306	0.59	306	0.59	306	0.59	422	0.56	670	0.62	761	0.58	761	0.58	
585C	127	5	384	0.58	384	0.58	384	0.58	529	0.55	840	0.61	955	0.58	955	0.58	
	152	6	462	0.58	462	0.58	462	0.58	637	0.55	1011	0.61	1150	0.57	1150	0.57	
	178	7	540	0.57	540	0.57	540	0.57	745	0.55	1192	0.61	1364	0.57	1364	0.57	
	203	8	618	0.57	618	0.57	618	0.57	852	0.55	1353	0.61	1538	0.57	1538	0.57	
585C Long Stroke	225	8.875	686	0.56	686	0.56	686	0.56	946	0.54	1502	0.60	1708	0.57	1708	0.57	
	251	9.875	764	0.56	764	0.56	764	0.56	1054	0.54	1673	0.60	1903	0.57	1903	0.57	
	276	10.875	-----	-----	843	0.55	843	0.55	1162	0.54	1844	0.60	2097	0.57	2097	0.57	
	302	11.875	-----	-----	921	0.55	921	0.55	1269	0.54	2015	0.60	2292	0.56	2292	0.57	
	327	12.875	-----	-----	999	0.54	999	0.54	1377	0.53	2186	0.59	2486	0.56	2486	0.56	
	352	13.875	-----	-----	-----	-----	1077	0.54	1485	0.53	2357	0.59	2680	0.56	2680	0.56	
	378	14.875	-----	-----	-----	-----	1155	0.54	1592	0.53	2527	0.59	2875	0.56	2875	0.56	
	403	15.875	-----	-----	-----	-----	-----	-----	-----	-----	2698	0.59	3069	0.56	3069	0.56	
	429	16.875	-----	-----	-----	-----	-----	-----	-----	-----	2869	0.58	3263	0.56	3263	0.56	
	454	17.875	-----	-----	-----	-----	-----	-----	-----	-----	3040	0.58	3458	0.55	3458	0.55	
	479	18.875	-----	-----	-----	-----	-----	-----	-----	-----	3211	0.58	3652	0.55	3652	0.55	
	505	19.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	3846	0.55	3846	0.55	
	530	20.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4041	0.55	4041	0.55	
	556	21.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4235	0.55	4235	0.55	
	581	22.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4429	0.55	4429	0.55	
	606	23.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	4624	0.54	4624	0.54	
FB Minimum Travel, Inches			0.24	-----	0.24	-----	0.24	-----	0.42	-----	0.40	-----	0.47	-----	0.47	-----	
Min Throttling, Radius Plug			11.7	0.63	11.7	0.63	11.7	0.63	36.2	0.56	53.4	0.62	77.3	0.58	77.3	0.58	

WhisperFlo and Fisher are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2007, 2010; All Rights Reserved



Catalog 12

November 2010 - Page FB-11

WhisperFlo™ Trim
Level Z

Valve Size, NPS			8 x 12		10 x 16		12 x 18		12 x 20		16 x 24		20 x 30		24 x 36	
Nominal Inlet Size, Inches			8	X _T at Travel for 8 x 12	10	X _T at Travel for 10 x 16	12	X _T at Travel for 12 x 18	12	X _T at Travel for 12 x 20	16	X _T at Travel for 16 x 24	20	X _T at Travel for 20 x 30	24	X _T at Travel for 24 x 36
Nominal Outlet Size, Inches			12		16		18		20		24		30		36	
Port Diameter		mm	178		178		178		279		375		463		463	
		Inches	7.00		7.00		7.00		11.00		14.75		18.25		18.25	
Recommended Actuator	Plug Travel		WhisperFlo Level Z, Linear Characteristic, C _v Flow Coefficients													
	mm	Inches														
667/657	102	4	199	0.43	199	0.43	199	0.43	299	0.44	463	0.47	548	0.45	548	0.45
585C	127	5	250	0.43	250	0.43	250	0.43	375	0.44	581	0.47	689	0.45	689	0.45
	152	6	301	0.43	301	0.43	301	0.43	451	0.43	699	0.46	828	0.45	828	0.45
	178	7	352	0.43	352	0.43	352	0.43	527	0.43	817	0.46	968	0.45	968	0.45
	203	8	402	0.43	402	0.43	402	0.43	603	0.43	935	0.46	1107	0.45	1107	0.45
	225	8.875	447	0.42	447	0.42	447	0.42	670	0.43	1039	0.46	1230	0.45	1230	0.45
585C Long Stroke	251	9.875	498	0.42	498	0.42	498	0.42	746	0.43	1157	0.46	1370	0.45	1370	0.45
	276	10.875	-----	-----	549	0.42	549	0.42	823	0.43	1275	0.46	1510	0.45	1510	0.45
	302	11.875	-----	-----	599	0.42	599	0.42	899	0.43	1393	0.46	1650	0.45	1650	0.45
	327	12.875	-----	-----	650	0.42	650	0.42	975	0.43	1512	0.46	1790	0.45	1790	0.45
	352	13.875	-----	-----	-----	-----	701	0.41	1051	0.42	1630	0.46	1929	0.45	1929	0.45
	378	14.875	-----	-----	-----	-----	752	0.41	1128	0.42	1748	0.45	2069	0.44	2069	0.44
	403	15.875	-----	-----	-----	-----	-----	-----	-----	-----	1866	0.45	2209	0.44	2209	0.44
	429	16.875	-----	-----	-----	-----	-----	-----	-----	-----	1984	0.45	2349	0.44	2349	0.44
	454	17.875	-----	-----	-----	-----	-----	-----	-----	-----	2103	0.45	2489	0.44	2489	0.44
	479	18.875	-----	-----	-----	-----	-----	-----	-----	-----	2221	0.45	2629	0.44	2629	0.44
	505	19.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2769	0.44	2769	0.44
	530	20.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	2909	0.44	2909	0.44
	556	21.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	3049	0.44	3049	0.44
	581	22.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	3189	0.44	3189	0.44
	606	23.875	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	3329	0.44	3329	0.44
	FB Minimum Travel, Inches			0.24	-----	0.24	-----	0.24	-----	0.42	-----	0.40	-----	0.47	-----	0.47
Min Throttling, Radius Plug			10.7	0.44	10.7	0.44	10.7	0.44	33.0	0.44	48.1	0.47	71.8	0.46	71.8	0.46



This page is intentionally left blank

Catalog 12

November 2008 - Page GX-1

Equal Percentage
Flow Up through the Port

Equal Percentage - Flow Up														Equal Percentage Characteristic
Valve Size	Port Diameter mm	Maximum Travel mm	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
				10	20	30	40	50	60	70	80	90	100	
DN 15 (NPS 1/2)	9.5	20	C _V	0.118	0.191	0.309	0.457	0.607	0.941	1.39	2.00	2.77	3.34	0.98
			K _V	0.102	0.166	0.267	0.396	0.525	0.814	1.20	1.73	2.40	2.89	---
			X _T	0.67	0.59	0.58	0.56	0.57	0.55	0.57	0.57	0.61	0.69	---
			F _d	0.11	0.13	0.16	0.19	0.22	0.28	0.34	0.44	0.58	0.80	---
	9.5 ⁽²⁾	20	C _V	0.089	0.109	0.153	0.213	0.289	0.393	0.552	0.754	1.03	1.43	0.99
			K _V	0.077	0.094	0.132	0.185	0.250	0.340	0.478	0.652	0.891	1.24	---
			X _T	0.72	0.65	0.61	0.59	0.57	0.54	0.53	0.55	0.55	0.59	---
			F _d	0.09	0.09	0.09	0.11	0.13	0.14	0.20	0.24	0.28	0.35	---
DN 20 (NPS 3/4)	14	20	C _V	0.154	0.192	0.311	0.505	0.763	1.18	1.91	3.05	4.93	6.41	0.98
			K _V	0.133	0.166	0.269	0.437	0.660	1.02	1.65	2.64	4.27	5.55	---
			X _T	0.62	0.60	0.58	0.59	0.52	0.54	0.54	0.62	0.71	0.77	---
			F _d	0.08	0.08	0.10	0.13	0.16	0.20	0.26	0.33	0.47	0.59	---
	9.5	20	C _V	0.128	0.206	0.325	0.479	0.629	0.984	1.46	2.14	3.06	3.75	0.95
			K _V	0.111	0.178	0.281	0.415	0.544	0.851	1.27	1.85	2.65	3.25	---
			X _T	0.65	0.66	0.62	0.61	0.62	0.65	0.64	0.63	0.65	0.62	---
			F _d	0.11	0.13	0.16	0.19	0.22	0.28	0.34	0.44	0.58	0.80	---
	9.5 ⁽²⁾	20	C _V	0.127	0.149	0.176	0.222	0.311	0.440	0.599	0.828	1.14	1.65	0.97
			K _V	0.110	0.129	0.153	0.192	0.269	0.381	0.518	0.716	0.985	1.43	---
			X _T	0.69	0.77	0.68	0.81	0.76	0.71	0.72	0.67	0.75	0.79	---
			F _d	0.09	0.09	0.09	0.11	0.13	0.14	0.20	0.24	0.28	0.35	---

1. At 100% travel.
2. Restricted trim.
3. Balanced trim.
4. Balanced, restricted trim.

-continued-



Equal Percentage - Flow Up													Equal Percentage Characteristic	
Valve Size	Port Diameter	Maximum Travel	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 25 (NPS 1)	22	20	C _V	0.673	0.937	1.32	1.89	2.25	3.13	5.05	7.39	10.5	13.7	0.93
			K _V	0.582	0.810	1.14	1.63	1.94	2.71	4.36	6.39	9.05	11.9	---
			X _T	0.61	0.59	0.58	0.57	0.74	0.82	0.64	0.58	0.68	0.77	---
			F _d	0.09	0.11	0.13	0.15	0.18	0.21	0.25	0.31	0.39	0.49	---
	14	20	C _V	0.139	0.186	0.315	0.511	0.776	1.23	1.97	3.28	5.35	6.89	0.97
			K _V	0.120	0.161	0.272	0.442	0.671	1.07	1.70	2.84	4.63	5.96	---
			X _T	0.78	0.71	0.59	0.59	0.58	0.51	0.57	0.51	0.67	0.81	---
			F _d	0.08	0.08	0.10	0.13	0.16	0.20	0.26	0.33	0.47	0.59	---
	9.5	20	C _V	0.133	0.222	0.347	0.501	0.699	1.04	1.50	2.15	2.98	3.57	0.95
			K _V	0.115	0.192	0.300	0.433	0.605	0.900	1.29	1.86	2.58	3.09	---
			X _T	0.77	0.68	0.65	0.61	0.55	0.55	0.58	0.55	0.59	0.68	---
			F _d	0.11	0.13	0.16	0.19	0.22	0.28	0.34	0.44	0.58	0.80	---
	9.5 ⁽²⁾	20	C _V	0.127	0.149	0.176	0.222	0.311	0.440	0.599	0.828	1.14	1.65	0.95
			K _V	0.110	0.129	0.152	0.192	0.269	0.381	0.518	0.716	0.986	1.43	---
			X _T	0.311	0.892	0.755	0.681	0.641	0.618	0.595	0.576	0.582	0.543	---
			F _d	0.09	0.09	0.09	0.11	0.13	0.14	0.20	0.24	0.28	0.35	---
DN 40 (NPS 1-1/2)	36	20	C _V	1.01	1.91	2.74	4.24	6.13	8.25	11.5	16.7	22.0	27.2	0.94
			K _V	0.874	1.65	2.37	3.67	5.30	7.14	9.95	14.4	19.0	23.5	---
			X _T	0.87	0.93	0.91	0.80	0.89	0.86	0.76	0.79	0.82	0.78	---
			F _d	0.64	0.80	0.87	0.54	0.55	0.50	0.41	0.40	0.43	0.45	---
	22	20	C _V	0.591	0.850	1.20	1.79	2.51	3.50	4.93	7.07	11.0	14.3	0.93
			K _V	0.511	0.735	1.04	1.55	2.17	3.03	4.26	6.12	9.52	12.4	---
			X _T	0.53	0.51	0.53	0.45	0.45	0.49	0.42	0.47	0.57	0.71	---
			F _d	0.09	0.11	0.13	0.15	0.18	0.21	0.25	0.31	0.39	0.49	---
	14	20	C _V	0.103	0.141	0.254	0.440	0.689	1.11	1.84	3.12	5.12	6.87	0.97
			K _V	0.0891	0.122	0.220	0.381	0.596	0.960	1.59	2.70	4.43	5.94	---
			X _T	1.00	0.80	0.68	0.67	0.60	0.54	0.55	0.52	0.64	0.77	---
			F _d	0.08	0.08	0.10	0.13	0.16	0.20	0.26	0.33	0.47	0.59	---
DN 50 (NPS 2)	46	20	C _V	1.08	1.75	3.75	6.04	9.5	14.9	21.8	30.9	37.7	43.7	0.91
			K _V	0.931	1.51	3.24	5.22	8.20	12.9	18.9	26.7	32.6	37.8	---
			X _T	0.73	0.70	0.79	0.81	0.78	0.81	0.76	0.71	0.82	0.85	---
			F _d	0.70	0.84	0.47	0.48	0.40	0.36	0.37	0.40	0.43	0.45	---
	36	20	C _V	1.08	2.01	2.80	4.26	6.31	8.38	11.6	17.2	23.1	28.6	0.93
			K _V	0.931	1.74	2.42	3.69	5.45	7.25	10.0	14.9	20.0	24.7	---
			X _T	0.71	0.79	0.86	0.81	0.79	0.79	0.73	0.69	0.75	0.75	---
			F _d	0.64	0.80	0.87	0.54	0.55	0.50	0.41	0.40	0.43	0.45	---
	22	20	C _V	0.591	0.850	1.20	1.79	2.51	3.50	4.93	7.07	11.0	14.3	0.96
			K _V	0.511	0.735	1.04	1.55	2.17	3.03	4.26	6.12	9.52	12.4	---
			X _T	0.71	0.68	0.61	0.62	0.60	0.60	0.57	0.45	0.60	0.71	---
			F _d	0.09	0.11	0.13	0.15	0.18	0.21	0.25	0.31	0.39	0.49	---
1. At 100% travel. 2. Restricted trim. 3. Balanced trim. 4. Balanced, restricted trim.														

1. At 100% travel.
2. Restricted trim.
3. Balanced trim.
4. Balanced, restricted trim.

-continued-

Catalog 12

November 2008 - Page GX-3

Equal Percentage
Flow Up through the Port

Equal Percentage - Flow Up													Equal Percentage Characteristic	
Valve Size	Port Diameter	Maximum Travel	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 80 (NPS 3)	70	40	C _V	2.38	6.92	11.5	16.4	22.4	31.9	46.5	63.6	80.6	95.1	0.94
			K _V	2.06	5.99	9.95	14.2	19.4	27.6	40.2	55.0	69.7	82.3	---
			X _T	0.83	0.81	0.85	0.83	0.80	0.76	0.72	0.75	0.77	0.80	---
			F _d	0.82	0.50	0.53	0.53	0.47	0.42	0.40	0.40	0.43	0.45	---
	70 ⁽³⁾	20	C _V	2.71	4.63	7.60	11.3	17.1	23.7	35.3	50.4	61.6	75.7	0.89
			K _V	2.34	4.00	6.57	9.79	14.7	20.5	30.5	43.6	53.3	65.5	---
			X _T	0.54	0.50	0.49	0.51	0.51	0.57	0.51	0.50	0.64	0.68	---
			F _d	0.06	0.07	0.10	0.12	0.15	0.18	0.22	0.26	0.30	0.34	---
	46	20	C _V	0.873	1.66	3.41	5.66	8.75	13.8	20.7	30.5	37.1	43.7	0.97
			K _V	0.755	1.44	2.95	4.90	7.57	11.9	17.9	26.4	32.1	37.8	---
			X _T	0.75	0.82	0.75	0.82	0.77	0.73	0.78	0.70	0.85	0.88	---
			F _d	0.70	0.84	0.47	0.48	0.40	0.36	0.37	0.40	0.43	0.45	---
	36	20	C _V	1.08	2.01	2.80	4.26	6.31	8.38	11.6	17.2	23.1	28.6	0.96
			K _V	0.934	1.74	2.42	3.68	5.46	7.25	10.0	14.9	20.0	24.7	---
			X _T	0.84	0.86	0.88	0.84	0.83	0.88	0.79	0.72	0.76	0.85	---
			F _d	0.64	0.80	0.87	0.54	0.55	0.50	0.41	0.40	0.43	0.45	---
DN 100 (NPS 4)	90	40	C _V	5.56	13.6	21.1	29.1	40.8	55.8	77.5	117	145	165	0.90
			K _V	4.81	11.7	18.3	25.1	35.3	48.3	67.0	101	126	143	---
			X _T	0.93	0.93	0.94	0.90	0.85	0.82	0.82	0.75	0.78	0.80	---
			F _d	0.39	0.49	0.52	0.48	0.45	0.44	0.33	0.36	0.39	0.41	---
	90 ⁽³⁾	20	C _V	5.88	9.43	13.1	17.5	27.3	42.4	63.4	85.5	107	128	0.87
			K _V	5.09	8.16	11.3	15.1	23.6	36.7	54.8	74.0	92.6	111	---
			X _T	0.55	0.54	0.54	0.55	0.43	0.52	0.57	0.58	0.63	0.67	---
			F _d	0.07	0.08	0.10	0.11	0.13	0.18	0.22	0.26	0.30	0.34	---
	90 ⁽⁴⁾	20	C _V	2.38	3.65	5.64	8.42	12.0	17.4	24.8	36.7	53.0	68.5	0.90
			K _V	2.06	3.16	4.88	7.28	10.4	15.1	21.5	31.7	45.8	59.3	---
			X _T	0.68	0.61	0.57	0.55	0.55	0.55	0.56	0.48	0.50	0.58	---
			F _d	0.04	0.05	0.06	0.08	0.09	0.11	0.14	0.16	0.20	0.24	---
	70	40	C _V	2.04	5.78	10.6	15.3	20.8	29.8	43.3	61.9	80.6	97.7	0.92
			K _V	1.76	5.00	9.17	13.2	18.0	25.8	37.5	53.5	69.7	84.5	---
			X _T	0.79	0.83	0.85	0.85	0.82	0.77	0.73	0.73	0.75	0.76	---
			F _d	0.82	0.50	0.53	0.53	0.47	0.42	0.40	0.40	0.43	0.45	---
46	20	C _V	1.02	1.76	3.58	5.76	8.85	14.1	21.4	30.6	37.9	44.0	0.94	
		K _V	0.88	1.52	3.10	4.98	7.66	12.2	18.5	26.5	32.8	38.1	---	
		X _T	0.69	0.77	0.68	0.81	0.76	0.71	0.72	0.67	0.75	0.79	---	
		F _d	0.70	0.84	0.47	0.48	0.40	0.36	0.37	0.40	0.43	0.45	---	
1. At 100% travel. 2. Restricted trim. 3. Balanced trim. 4. Balanced, restricted trim.														

-continued-



Equal Percentage - Flow Up													Equal Percentage Characteristic	
Valve Size	Port Diameter	Maximum Travel	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 150 (NPS 6)	136	60	C _V	13.8	25.0	40.0	60.0	90.0	139	201	271	344	401	0.88
			K _V	11.9	21.6	34.6	51.9	77.9	120	174	234	298	347	---
			X _T	0.73	0.82	0.82	0.81	0.79	0.70	0.67	0.67	0.54	0.71	---
			F _d	0.45	0.39	0.33	0.28	0.24	0.22	0.20	0.18	0.17	0.16	---
	136 ⁽³⁾	60	C _V	19.5	35.0	49.0	65.0	92.0	133	194	252	322	374	0.90
			K _V	16.9	30.3	42.4	56.2	79.6	115	168	218	279	324	---
			X _T	0.58	0.51	0.55	0.56	0.58	0.55	0.53	0.66	0.72	0.76	---
			F _d	0.09	0.10	0.11	0.13	0.16	0.19	0.22	0.27	0.32	0.37	---
	90 ⁽²⁾	40	C _V	7.90	16.0	23.0	33.0	45.0	60.0	81.0	126	159	192	0.95
			K _V	6.83	13.8	19.9	28.5	38.9	51.9	70.1	109	138	166	---
			X _T	0.68	0.80	0.85	0.77	0.78	0.78	0.83	0.70	0.76	0.75	---
			F _d	0.39	0.49	0.52	0.48	0.45	0.44	0.33	0.36	0.39	0.41	---
1. At 100% travel. 2. Restricted trim. 3. Balanced trim. 4. Balanced, restricted trim.														

Linear - Flow Up														Linear Characteristic
Valve Size	Port Diameter mm	Maximum Travel mm	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
				10	20	30	40	50	60	70	80	90	100	
DN 15 (NPS 1/2)	9.5	20	C _V	0.179	0.415	0.713	1.03	1.35	1.70	2.09	2.53	3.01	3.45	0.93
			K _V	0.155	0.359	0.617	0.891	1.17	1.47	1.81	2.19	2.60	2.98	---
			X _T	0.55	0.57	0.64	0.63	0.67	0.68	0.71	0.67	0.71	0.71	---
			F _d	0.12	0.18	0.24	0.29	0.34	0.39	0.45	0.53	0.65	0.80	---
	4.8 ⁽⁴⁾ 9°30'	20	C _V	0.0360	0.0880	0.160	0.246	0.341	0.436	0.524	0.618	0.726	0.785	0.94
			K _V	0.0311	0.0761	0.138	0.213	0.295	0.377	0.453	0.535	0.628	0.679	---
			X _T	0.52	0.55	0.50	0.50	0.53	0.50	0.52	0.53	0.49	0.55	---
			F _d	0.09	0.09	0.09	0.11	0.13	0.14	0.20	0.24	0.28	0.35	---
	4.8 ⁽⁴⁾ 4°39'	20	C _V	0.0356	0.0524	0.0736	0.0984	0.127	0.158	0.191	0.224	0.257	0.294	0.93
			K _V	0.0308	0.0453	0.0637	0.0851	0.110	0.137	0.165	0.194	0.222	0.254	---
			X _T	0.55	0.54	0.57	0.58	0.57	0.55	0.55	0.56	0.57	0.55	---
			F _d	0.08	0.10	0.13	0.15	0.17	0.19	0.22	0.24	0.26	0.28	---
	4.8 ⁽⁴⁾ 2°15'	20	C _V	0.0437	0.0512	0.0597	0.0694	0.0806	0.0929	0.105	0.116	0.126	0.139	0.86
			K _V	0.0378	0.0443	0.0516	0.0600	0.0697	0.0804	0.0908	0.100	0.109	0.120	---
			X _T	0.54	0.54	0.54	0.54	0.54	0.53	0.54	0.56	0.57	0.56	---
			F _d	0.08	0.08	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0.17	---
	4.8 ⁽⁴⁾ 1°8'	20	C _V	0.0037	0.0055	0.0085	0.0121	0.0163	0.0205	0.0246	0.0284	0.0326	0.0389	0.97
			K _V	0.0032	0.0047	0.0073	0.0105	0.0141	0.0177	0.0213	0.0246	0.0282	0.0336	---
			X _T	1.00	0.94	0.81	0.76	0.69	0.64	0.60	0.59	0.60	0.58	---
			F _d	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.10	0.11	---
DN 20 (NPS 3/4)	14	20	C _V	0.775	1.57	2.38	3.10	3.79	4.51	5.34	6.23	7.05	7.58	0.97
			K _V	0.670	1.36	2.06	2.68	3.28	3.90	4.62	5.39	6.10	6.55	---
			X _T	0.62	0.59	0.62	0.61	0.62	0.64	0.65	0.70	0.73	0.72	---
			F _d	0.16	0.24	0.30	0.35	0.39	0.45	0.52	0.60	0.71	0.79	---
	9.5	20	C _V	0.219	0.488	0.794	1.13	1.48	1.85	2.31	2.85	3.43	3.84	0.95
			K _V	0.190	0.422	0.687	0.981	1.28	1.60	2.00	2.47	2.96	3.33	---
			X _T	0.57	0.59	0.57	0.57	0.54	0.55	0.54	0.52	0.58	0.59	---
			F _d	0.12	0.18	0.24	0.29	0.34	0.39	0.45	0.53	0.65	0.80	---
	4.8 ⁽⁴⁾ 9°30'	20	C _V	0.0360	0.0880	0.160	0.246	0.341	0.436	0.524	0.618	0.726	0.785	0.94
			K _V	0.0311	0.0761	0.138	0.213	0.295	0.377	0.453	0.535	0.628	0.679	---
			X _T	0.52	0.55	0.50	0.50	0.53	0.50	0.52	0.53	0.49	0.55	---
			F _d	0.10	0.15	0.19	0.24	0.29	0.33	0.38	0.42	0.47	0.51	---
	4.8 ⁽⁴⁾ 4°39'	20	C _V	0.0356	0.0524	0.0736	0.0984	0.127	0.158	0.191	0.224	0.257	0.294	0.93
			K _V	0.0308	0.0453	0.0637	0.0851	0.110	0.137	0.165	0.194	0.222	0.254	---
			X _T	0.55	0.54	0.57	0.58	0.57	0.55	0.55	0.56	0.57	0.55	---
			F _d	0.08	0.10	0.13	0.15	0.17	0.19	0.22	0.24	0.26	0.28	---
	4.8 ⁽⁴⁾ 2°15'	20	C _V	0.0437	0.0512	0.0597	0.0694	0.0806	0.0929	0.105	0.116	0.126	0.139	0.86
			K _V	0.0378	0.0443	0.0516	0.0600	0.0697	0.0804	0.0908	0.100	0.109	0.120	---
			X _T	0.54	0.54	0.54	0.54	0.54	0.53	0.54	0.56	0.57	0.56	---
			F _d	0.08	0.08	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0.17	---
	4.8 ⁽⁴⁾ 1°8'	20	C _V	0.0037	0.0055	0.0085	0.0121	0.0163	0.0205	0.0246	0.0284	0.0326	0.0389	0.97
			K _V	0.0032	0.0047	0.0073	0.0105	0.0141	0.0177	0.0213	0.0246	0.0282	0.0336	---
			X _T	1.00	0.94	0.81	0.76	0.69	0.64	0.60	0.59	0.60	0.58	---
			F _d	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.10	0.11	---

1. At 100% travel.
2. Balanced trim.
3. Balanced, restricted trim.
4. Micro-Flow trim.

-continued-



Linear - Flow Up														Linear Characteristic
Valve Size	Port Diameter	Maximum Travel	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 25 (NPS 1)	22	20	C _V	1.72	3.06	4.50	7.04	8.52	9.74	11.1	12.7	14.6	15.5	0.94
			K _V	1.49	2.64	3.90	6.09	7.37	8.43	9.58	10.9	12.6	13.4	---
			X _T	0.51	0.58	0.60	0.44	0.47	0.52	0.56	0.68	0.74	0.80	---
			F _d	0.14	0.19	0.24	0.29	0.33	0.37	0.42	0.46	0.53	0.61	---
	14	20	C _V	0.685	1.46	2.28	3.05	3.81	4.56	5.42	6.34	7.21	7.80	0.96
			K _V	0.592	1.26	1.97	2.64	3.29	3.95	4.69	5.48	6.24	6.75	---
			X _T	0.73	0.64	0.62	0.60	0.59	0.59	0.60	0.63	0.67	0.66	---
			F _d	0.16	0.24	0.30	0.35	0.39	0.45	0.52	0.60	0.71	0.79	---
	9.5	20	C _V	0.187	0.453	0.769	1.10	1.42	1.79	2.22	2.73	3.29	3.70	0.94
			K _V	0.161	0.392	0.665	0.952	1.23	1.55	1.92	2.36	2.85	3.20	---
			X _T	0.59	0.56	0.55	0.53	0.58	0.57	0.60	0.58	0.63	0.63	---
			F _d	0.12	0.18	0.24	0.29	0.34	0.39	0.45	0.53	0.65	0.80	---
	4.8 ⁽⁴⁾ 9°30'	20	C _V	0.0360	0.0880	0.160	0.246	0.341	0.436	0.524	0.618	0.726	0.785	0.94
			K _V	0.0311	0.0761	0.138	0.213	0.295	0.377	0.453	0.535	0.628	0.679	---
			X _T	0.52	0.55	0.50	0.50	0.53	0.50	0.52	0.53	0.49	0.55	---
			F _d	0.10	0.15	0.19	0.24	0.29	0.33	0.38	0.42	0.47	0.51	---
	4.8 ⁽⁴⁾ 4°39'	20	C _V	0.0356	0.0524	0.0736	0.0984	0.127	0.158	0.191	0.224	0.257	0.294	0.93
			K _V	0.0308	0.0453	0.0637	0.0851	0.110	0.137	0.165	0.194	0.222	0.254	---
			X _T	0.55	0.54	0.57	0.58	0.57	0.55	0.55	0.56	0.57	0.55	---
			F _d	0.08	0.10	0.13	0.15	0.17	0.19	0.22	0.24	0.26	0.28	---
	4.8 ⁽⁴⁾ 2°15'	20	C _V	0.0437	0.0512	0.0597	0.0694	0.0806	0.0929	0.105	0.116	0.126	0.139	0.86
			K _V	0.0378	0.0443	0.0516	0.0600	0.0697	0.0804	0.0908	0.100	0.109	0.120	---
			X _T	0.54	0.54	0.54	0.54	0.54	0.53	0.54	0.56	0.57	0.56	---
			F _d	0.08	0.08	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0.17	---
	4.8 ⁽⁴⁾ 1°8'	20	C _V	0.0037	0.0055	0.0085	0.0121	0.0163	0.0205	0.0246	0.0284	0.0326	0.0389	0.97
			K _V	0.0032	0.0047	0.0073	0.0105	0.0141	0.0177	0.0213	0.0246	0.0282	0.0336	---
			X _T	1.00	0.94	0.81	0.76	0.69	0.64	0.60	0.59	0.60	0.58	---
			F _d	0.05	0.06	0.06	0.07	0.07	0.08	0.09	0.09	0.10	0.11	---
DN 40 (NPS 1-1/2)	36	20	C _V	1.18	4.50	7.46	11.0	14.1	16.8	20.3	24.4	28.8	32.0	0.93
			K _V	1.02	3.89	6.45	9.5	12.2	14.5	17.6	21.1	24.9	27.7	---
			X _T	0.88	0.75	0.88	0.82	0.80	0.88	0.85	0.80	0.78	0.78	---
			F _d	0.30	0.42	0.47	0.49	0.51	0.52	0.50	0.48	0.47	0.48	---
	22	20	C _V	1.41	2.76	4.20	5.76	7.32	8.85	10.5	12.9	15.1	17.2	0.95
			K _V	1.22	2.39	3.63	4.98	6.33	7.66	9.08	11.2	13.1	14.9	---
			X _T	0.68	0.58	0.58	0.59	0.58	0.59	0.65	0.60	0.68	0.75	---
			F _d	0.08	0.10	0.13	0.15	0.17	0.19	0.22	0.24	0.26	0.28	---
	14	20	C _V	0.676	1.55	2.27	3.03	3.77	4.55	5.44	6.47	7.36	8.25	0.96
			K _V	0.585	1.34	1.96	2.62	3.26	3.94	4.71	5.60	6.37	7.14	---
			X _T	0.58	0.50	0.59	0.62	0.59	0.58	0.60	0.63	0.67	0.64	---
			F _d	0.08	0.08	0.09	0.11	0.12	0.13	0.14	0.15	0.16	0.17	---
1. At 100% travel. 2. Balanced trim. 3. Balanced, restricted trim. 4. Micro-Flow trim.														

1. At 100% travel.
2. Balanced trim.
3. Balanced, restricted trim.
4. Micro-Flow trim.

-continued-

Catalog 12

November 2008 - Page GX-7

Linear
Flow Up through the Port

Linear - Flow Up														Linear Characteristic
Valve Size	Port Diameter	Maximum Travel	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 50 (NPS 2)	46	20	C _V	2.90	7.53	12.6	17.5	22.1	27.8	34.1	41.6	45.7	48.6	0.91
			K _V	2.51	6.51	10.9	15.1	19.1	24.0	29.5	36.0	39.5	42.0	---
			X _T	0.71	0.87	0.81	0.87	0.85	0.82	0.79	0.82	0.85	0.84	---
			F _d	0.25	0.36	0.42	0.46	0.47	0.46	0.46	0.47	0.48	0.50	---
	36	20	C _V	1.69	5.05	8.37	11.6	14.8	17.9	20.9	24.7	29.2	33.9	0.93
			K _V	1.47	4.37	7.24	10.0	12.8	15.5	18.0	21.3	25.3	29.3	---
			X _T	0.73	0.76	0.84	0.81	0.82	0.84	0.87	0.85	0.84	0.82	---
			F _d	0.30	0.42	0.47	0.49	0.51	0.52	0.50	0.48	0.47	0.48	---
	22	20	C _V	1.58	3.01	4.51	6.02	7.63	9.10	10.9	13.1	15.1	17.2	0.93
			K _V	1.37	2.60	3.90	5.21	6.60	7.87	9.40	11.3	13.0	14.9	---
			X _T	0.66	0.62	0.62	0.61	0.61	0.60	0.58	0.55	0.62	0.68	---
			F _d	0.08	0.10	0.13	0.15	0.17	0.19	0.22	0.24	0.26	0.28	---
DN 80 (NPS 3)	70	40	C _V	9.74	20.9	32.9	46.2	59.6	74.3	87.5	97.2	109	117	0.89
			K _V	8.43	18.1	28.5	40.0	51.6	64.3	75.7	84.1	94.3	101	---
			X _T	0.62	0.85	0.83	0.81	0.81	0.81	0.81	0.85	0.80	0.77	---
			F _d	0.33	0.43	0.47	0.48	0.49	0.50	0.50	0.51	0.51	0.51	---
	70 ⁽²⁾	20	C _V	10.6	21.3	31.9	42.7	53.6	63.8	74.1	85.0	94.4	102	0.85
			K _V	9.17	18.4	27.6	36.9	46.4	55.2	64.1	73.5	81.7	88.2	---
			X _T	0.67	0.68	0.66	0.65	0.64	0.67	0.66	0.63	0.63	0.65	---
			F _d	0.12	0.17	0.21	0.25	0.28	0.31	0.34	0.36	0.39	0.41	---
	46	20	C _V	2.09	7.74	12.0	16.5	21.2	26.6	33.0	40.6	46.5	51.8	0.97
			K _V	1.81	6.70	10.4	14.3	18.3	23.0	28.5	35.1	40.2	44.8	---
			X _T	0.65	0.62	0.79	0.85	0.88	0.85	0.88	0.83	0.88	0.90	---
			F _d	0.25	0.36	0.42	0.46	0.47	0.46	0.46	0.47	0.48	0.50	---
	36	20	C _V	1.17	4.87	7.76	11.1	14.3	17.3	19.3	23.2	27.8	33.3	0.97
			K _V	1.01	4.21	6.71	9.58	12.4	14.9	16.7	20.1	24.1	28.8	---
			X _T	0.74	0.59	0.81	0.80	0.82	0.83	0.94	0.96	0.93	0.87	---
			F _d	0.30	0.42	0.47	0.49	0.51	0.52	0.50	0.48	0.47	0.48	---
DN 100 (NPS 4)	90	40	C _V	18.2	39.6	59.0	82.4	104	124	141	156	171	184	0.91
			K _V	15.8	34.3	51.0	71.3	90.0	108	122	135	147	159	---
			X _T	0.78	0.84	0.90	0.85	0.86	0.91	0.91	0.90	0.85	0.82	---
			F _d	0.26	0.36	0.41	0.43	0.45	0.46	0.47	0.48	0.48	0.48	---
	90 ⁽²⁾	20	C _V	12.3	28.5	44.6	60.2	77.6	95.4	112	130	143	151	0.82
			K _V	10.6	24.7	38.6	52.1	67.1	82.5	96.9	112	124	131	---
			X _T	0.71	0.65	0.58	0.67	0.59	0.57	0.58	0.61	0.59	0.64	---
			F _d	0.11	0.16	0.20	0.23	0.27	0.29	0.31	0.34	0.36	0.39	---
	90 ⁽³⁾	20	C _V	5.99	13.6	22.3	31.5	40.4	49.6	59.2	69.0	79.6	92.3	0.82
			K _V	5.18	11.8	19.3	27.2	34.9	42.9	51.2	59.7	68.9	79.8	---
			X _T	0.60	0.59	0.61	0.58	0.59	0.62	0.59	0.58	0.57	0.52	---
			F _d	0.07	0.11	0.14	0.16	0.18	0.20	0.22	0.24	0.25	0.27	---
	70	40	C _V	9.04	22.1	33.8	47.0	60.8	76.9	92.0	107	119	128	0.94
			K _V	7.82	19.1	29.2	40.7	52.6	66.5	79.6	92.6	103	111	---
			X _T	0.80	0.82	0.84	0.83	0.81	0.80	0.79	0.81	0.81	0.82	---
			F _d	0.33	0.43	0.47	0.48	0.49	0.50	0.50	0.51	0.51	0.51	---
	46	20	C _V	2.37	7.98	13.1	17.3	21.9	27.1	33.2	40.3	46.8	52.2	0.96
			K _V	2.05	6.90	11.3	15.0	19.0	23.5	28.7	34.8	40.5	45.2	---
			X _T	0.70	0.70	0.78	0.88	0.90	0.88	0.85	0.83	0.83	0.83	---
			F _d	0.25	0.36	0.42	0.46	0.47	0.46	0.46	0.47	0.48	0.50	---

1. At 100% travel.
2. Balanced trim.
3. Balanced, restricted trim.
4. Micro-Flow trim.

-continued-



Linear - Flow Up														Linear Characteristic
Valve Size	Port Diameter	Maximum Travel	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 150 (NPS 6)	136	60	C _V	48.9	83.0	114	144	179	212	248	308	370	413	0.87
			K _V	42.3	71.8	98.6	125	155	183	215	266	320	357	---
			X _T	0.69	0.79	0.82	0.81	0.70	0.70	0.71	0.65	0.65	0.70	---
			F _d	0.29	0.27	0.24	0.22	0.20	0.19	0.17	0.16	0.15	0.14	---
	136 ⁽²⁾	60	C _V	59.0	105	153	203	249	301	334	362	375	391	0.90
			K _V	51.0	90.8	132	176	215	260	289	313	324	338	---
			X _T	0.55	0.64	0.63	0.63	0.65	0.66	0.72	0.72	0.78	0.80	---
			F _d	0.13	0.19	0.23	0.27	0.32	0.36	0.40	0.43	0.47	0.50	---
	90 ⁽³⁾	40	C _V	22.1	46.0	65.0	88.0	111	136	160	187	209	233	0.91
			K _V	19.1	39.8	56.2	76.1	96.0	118	138	162	181	202	---
			X _T	0.67	0.72	0.85	0.84	0.85	0.84	0.85	0.81	0.82	0.83	---
			F _d	0.26	0.36	0.41	0.43	0.45	0.46	0.47	0.48	0.48	0.48	---
1. At 100% travel. 2. Balanced trim. 3. Restricted trim. 4. Micro-Flow trim.														

Whisper Trim III- Flow Up														Linear Characteristic
Valve Size	Port Diameter	Maximum Travel	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	mm		10	20	30	40	50	60	70	80	90	100	
DN 80 (NPS 3) Level A1	70	40	C _V	2.2	11.2	22.4	31.6	40.4	51.2	60.2	68.5	76.9	85.5	0.818
			K _V	1.9	9.7	19.4	27.3	34.9	44.3	52.1	59.3	66.5	74.0	---
			X _T	0.861	0.714	0.584	0.600	0.589	0.572	0.590	0.616	0.637	0.646	---
			F _d	0.431	0.176	0.131	0.110	0.096	0.085	0.078	0.072	0.067	0.063	---
DN 100 (NPS 4) Level A1	90	40	C _V	2.6	14.0	29.1	41.5	53.6	67.9	81.3	93.8	107	119	0.785
			K _V	2.2	12.1	25.2	35.9	46.4	58.7	70.3	81.1	92.6	103	---
			X _T	0.870	0.726	0.573	0.561	0.558	0.533	0.537	0.548	0.581	0.602	---
			F _d	0.379	0.155	0.115	0.097	0.084	0.075	0.069	0.063	0.059	0.055	---
	70 ⁽²⁾	40	C _V	2.2	11.2	22.4	31.6	40.4	51.2	60.2	68.5	76.9	85.5	0.818
			K _V	1.9	9.7	19.4	27.3	34.9	44.3	52.1	59.3	66.5	74.0	---
			X _T	0.861	0.714	0.584	0.600	0.589	0.572	0.590	0.616	0.637	0.646	---
			F _d	0.431	0.176	0.131	0.110	0.096	0.085	0.078	0.072	0.067	0.063	---
DN 150 (NPS 6) Level A1	136	60	C _V	53.8	89	124	166	201	233	263	296	315	324	0.809
			K _V	46.5	77	107	144	174	202	227	256	272	280	---
			X _T	0.540	0.559	0.557	0.517	0.534	0.550	0.566	0.564	0.594	0.659	---
			F _d	0.134	0.087	0.070	0.060	0.053	0.048	0.044	0.041	0.039	0.037	---
	90 ⁽²⁾	40	C _V	2.6	14.0	29.1	41.5	53.6	67.9	81.3	93.8	107	119	0.785
			K _V	2.2	12.1	25.2	35.9	46.4	58.7	70.3	81.1	92.6	103	---
			X _T	0.870	0.726	0.573	0.561	0.558	0.533	0.537	0.548	0.581	0.602	---
			F _d	0.379	0.155	0.115	0.097	0.084	0.075	0.069	0.063	0.059	0.055	---
1. At 100% travel. 2. Unbalanced, restricted trim.														

Whisper Trim and Fisher are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2006, 2008; All Rights Reserved



Cavitrol® III, Flow Down															Linear Characteristic	
Trim Stage	Valve Size	Port Diameter	Maximum Travel	Flow Coefficient	Minimum Throttling $C_v^{(1)}$	Valve Opening—Percent of Total Travel										$F_L^{(2)}$
		mm	mm			10	20	30	40	50	60	70	80	90	100	
One Stage	DN 25 (NPS 1)	22	20	C_v	0.4	0.4	1.1	2.0	2.9	3.7	4.6	5.2	5.9	6.5	7.1	0.97
				K_v	0.346	0.346	0.952	1.73	2.51	3.20	3.98	4.50	5.10	5.62	6.14	---
	DN 40 (NPS 1-1/2)	36	20	C_v	1.1	0.4	1.7	4.2	6.6	9.2	11.2	13.6	15.6	17.5	19.4	0.97
				K_v	0.952	0.346	1.47	3.63	5.71	7.96	9.69	11.8	13.5	15.1	16.8	---
	DN 50 (NPS 2)	46	20	C_v	2.0	0.8	3.2	5.9	9.1	12.6	15.3	17.8	20.4	22.8	25.2	0.95
				K_v	1.73	0.692	2.77	5.10	7.87	10.9	13.2	15.4	17.6	19.7	21.8	---
1. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period. Erosion damage to the valve seats may result. 2. At 100% travel.																

This page is intentionally left blank

Catalog 12

February 2010 - Page GX 3-Way-1

Side Port Common (SPC) Diverging
Linear

Side Port Common (SPC) Diverging														Linear Characteristic	
Valve Size	Maximum Travel	Exit Port	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾	
	mm			0 (Plug Down)	10	20	30	40	50	60	70	80	90		100 (Plug Up)
DN25/ NPS 1	19	Right	Cv	16.1	15.0	14.2	13.5	12.6	11.1	9.35	7.21	5.27	2.89	0	0.919
			Kv	14.0	13.0	12.3	11.7	10.9	9.56	8.09	6.23	4.56	2.50	0	----
			Xt	0.615	0.543	0.427	0.308	0.250	0.226	0.203	0.148	0.119	0.097	0	----
		Bottom	Cv	0	0.897	2.43	4.29	6.06	7.81	9.78	11.6	13.3	15.0	15.6	0.951
			Kv	0	0.776	2.10	3.71	5.25	6.75	8.46	10.0	11.5	13.0	13.5	----
			Xt	0	0.899	0.687	0.654	0.698	0.673	0.622	0.700	0.706	0.702	0.758	----
DN40/ NPS 1–1/2	19	Right	Cv	25.4	22.4	20.5	17.7	15.8	14.2	11.9	9.27	6.93	4.09	0	0.991
			Kv	22.0	19.4	17.7	15.3	13.7	12.3	10.3	8.01	6.00	3.54	0	----
			Xt	0.831	0.882	0.741	0.697	0.565	0.501	0.450	0.389	0.341	0.285	0	----
		Bottom	Cv	0	2.33	4.45	7.45	10.6	13.6	16.9	19.2	21.7	23.4	26.6	0.877
			Kv	0	2.01	3.84	6.45	9.18	11.8	14.6	16.6	18.8	20.2	23.0	----
			Xt	0	0.245	0.636	0.722	0.723	0.720	0.655	0.685	0.705	0.843	0.803	----
DN50/ NPS 2	19	Right	Cv	43.9	40.2	35.8	31.1	26.5	23.1	18.7	15.1	11.1	6.78	0	0.973
			Kv	38.0	34.7	30.9	26.9	22.9	20.0	16.2	13.1	9.63	5.87	0	----
			Xt	0.864	0.817	0.767	0.656	0.598	0.533	0.536	0.429	0.333	0.215	0	----
		Bottom	Cv	0	2.66	7.61	13.2	18.1	23.5	29.3	34.9	41.6	48.1	52.2	0.831
			Kv	0	2.30	6.58	11.4	15.6	20.3	25.4	30.2	36.0	41.6	45.1	----
			Xt	0	0.614	0.651	0.649	0.651	0.627	0.609	0.599	0.588	0.600	0.640	----
DN80/ NPS 3	38	Right	Cv	92.8	85.2	70.3	57.6	47.5	39.2	31.6	25.1	19.7	13.8	0	1.000
			Kv	80.3	73.7	60.8	49.8	41.1	33.9	27.3	21.8	17.0	11.9	0	----
			Xt	0.858	0.989	0.976	0.934	0.896	0.864	0.789	0.682	0.540	0.306	0	----
		Bottom	Cv	0	9.03	20.4	30.3	41.0	52.1	60.1	69.1	79.4	90.6	101.9	0.839
			Kv	0	7.81	17.7	26.2	35.4	45.1	52.0	59.8	68.7	78.3	88.1	----
			Xt	0	0.557	0.695	0.814	0.795	0.790	0.876	0.929	0.937	0.932	0.855	----
DN100/ NPS 4	38	Right	Cv	145.4	137.4	119.9	100.6	81.6	68.3	57.6	45.5	33.9	21.1	0	0.942
			Kv	125.8	118.9	103.7	87.0	70.6	59.1	49.9	39.4	29.3	18.2	0	----
			Xt	0.984	0.956	0.975	0.828	0.817	0.810	0.705	0.601	0.475	0.322	0	----
		Bottom	Cv	0	15.0	37.7	58.7	79.9	99.3	122.3	143.7	166.0	189.3	216.4	0.818
			Kv	0	13.0	32.6	50.8	69.1	85.9	105.8	124.3	143.6	163.8	187.2	----
			Xt	0	0.587	0.659	0.764	0.798	0.840	0.887	0.880	0.869	0.810	0.640	----
1. At maximum flow.															

1. At maximum flow.



GX 3-Way

Side Port Common (SPC) Converging
Linear

Catalog 12
February 2010 - Page GX 3-Way-2

Side Port Common (SPC) Converging														Linear Characteristic	
Valve Size	Maximum Travel	Inlet Port	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm			0 (Plug Down)	10	20	30	40	50	60	70	80	90	100 (Plug Up)	
DN25/ NPS 1	19	Right	Cv	15.9	13.2	10.7	9.30	7.54	6.31	4.65	3.64	2.04	1.04	0	0.978
			Kv	13.7	11.4	9.28	8.04	6.52	5.46	4.02	3.15	1.77	0.898	0	----
			Xt	0.658	0.866	0.758	0.657	0.723	0.669	0.739	0.728	0.909	0.898	0	----
		Bottom	Cv	0	0.562	1.72	3.28	4.90	6.51	8.74	10.3	12.9	14.3	16.3	0.949
			Kv	0	0.486	1.49	2.84	4.24	5.63	7.56	8.89	11.1	12.4	14.1	----
			Xt	0	0.397	1.005	0.966	0.847	0.767	0.675	0.659	0.605	0.662	0.663	----
DN40/ NPS 1–1/2	19	Right	Cv	29.3	26.7	23.0	17.1	14.6	11.9	9.47	7.07	4.78	2.34	0	0.999
			Kv	25.3	23.1	19.9	14.8	12.6	10.3	8.19	6.12	4.13	2.03	0	----
			Xt	0.821	0.714	0.711	0.857	0.806	0.900	0.907	0.803	0.842	0.660	0	----
		Bottom	Cv	0	0.881	3.02	6.46	8.83	11.7	15.9	18.3	20.9	24.3	28.4	0.978
			Kv	0	0.762	2.61	5.58	7.64	10.1	13.7	15.8	18.1	21.1	24.5	----
			Xt	0	----	0.994	0.779	0.865	0.832	0.679	0.745	0.752	0.785	0.749	----
DN50/ NPS 2	19	Right	Cv	54.6	48.5	42.2	35.2	28.5	22.9	18.0	12.4	7.44	3.02	0	0.932
			Kv	47.2	42.0	36.5	30.4	24.6	19.8	15.6	10.7	6.43	2.61	0	----
			Xt	0.626	0.636	0.596	0.559	0.574	0.605	0.617	0.685	0.798	0.949	0	----
		Bottom	Cv	0	2.05	6.44	11.0	15.8	20.9	25.6	32.2	41.6	47.6	52.0	0.958
			Kv	0	1.78	5.57	9.50	13.7	18.1	22.2	27.9	36.0	41.2	45.0	----
			Xt	0	0.888	0.919	0.958	0.895	0.844	0.859	0.804	0.735	0.745	0.785	----
DN80/ NPS 3	38	Right	Cv	111.9	101.0	87.8	72.7	59.2	48.3	38.5	28.5	18.9	9.87	0	1.000
			Kv	96.8	87.4	75.9	62.9	51.2	41.8	33.3	24.7	16.4	8.53	0	----
			Xt	0.811	0.757	0.669	0.704	0.755	0.765	0.745	0.723	0.725	0.716	0	----
		Bottom	Cv	0	6.84	16.1	26.4	40.0	55.0	70.4	85.7	100.8	113.1	127.8	0.965
			Kv	0	5.91	13.9	22.8	34.6	47.6	60.9	74.1	87.2	97.8	110.6	----
			Xt	0	0.989	0.967	0.994	0.876	0.800	0.773	0.759	0.752	0.767	0.752	----
DN100/ NPS 4	38	Right	Cv	163.4	153.0	137.0	115.0	92.0	74.0	57.8	43.5	28.3	12.8	0	0.869
			Kv	141.4	132.3	118.5	99.4	79.6	64.0	50.0	37.7	24.5	11.1	0	----
			Xt	0.688	0.634	0.558	0.558	0.603	0.610	0.595	0.578	0.573	0.525	0	----
		Bottom	Cv	0	12.9	30.1	46.6	66.3	88.4	112.4	135.9	161.4	185.2	212.2	0.816
			Kv	0	11.2	26.0	40.3	57.3	76.4	97.2	117.5	139.7	160.2	183.6	----
			Xt	0	0.920	0.949	0.826	0.789	0.737	0.683	0.660	0.625	0.629	0.589	----
1. At maximum flow.															

1. At maximum flow.

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2010; All Rights Reserved



Bottom Port Common (BPC) Diverging															Linear Characteristic
Valve Size	Maximum Travel	Exit Port	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm			0 (Plug Down)	10	20	30	40	50	60	70	80	90	100 (Plug Up)	
DN25/ NPS 1	19	Right	Cv	16.3	15.5	14.4	13.3	12.0	10.1	7.72	5.32	3.18	1.49	0	0.965
			Kv	14.1	13.4	12.5	11.5	10.4	8.70	6.68	4.61	2.75	1.29	0	----
			Xt	0.661	0.670	0.691	0.655	0.608	0.577	0.523	0.556	0.533	0.474	0	----
		Left	Cv	0	1.67	3.03	4.58	6.32	8.41	10.6	12.0	13.7	14.7	15.5	0.886
			Kv	0	1.45	2.62	3.96	5.46	7.27	9.18	10.4	11.9	12.8	13.4	----
			Xt	0	0.810	0.623	0.667	0.639	0.620	0.637	0.631	0.637	0.664	0.666	----
DN40/ NPS 1–1/2	19	Right	Cv	32.5	30.5	28.7	25.2	21.9	18.5	14.8	10.6	6.46	2.89	0	0.820
			Kv	28.1	26.4	24.8	21.8	18.9	16.0	12.8	9.16	5.58	2.50	0	----
			Xt	0.786	0.738	0.661	0.626	0.523	0.486	0.470	0.467	0.479	0.426	0	----
		Left	Cv	0	3.30	6.21	10.34	14.5	18.2	22.7	26.4	29.1	31.2	33.5	0.923
			Kv	0	2.85	5.37	8.94	12.56	15.7	19.7	22.9	25.1	27.0	29.0	----
			Xt	0	0.812	0.661	0.502	0.553	0.660	0.721	0.764	0.799	0.815	0.784	----
DN50/ NPS 2	19	Right	Cv	58.9	53.1	47.1	40.7	34.1	27.0	20.7	14.6	9.54	4.61	0	0.950
			Kv	50.9	45.9	40.7	35.2	29.5	23.4	17.9	12.6	8.26	3.99	0	----
			Xt	0.600	0.639	0.561	0.574	0.536	0.473	0.475	0.508	0.501	0.536	0	----
		Left	Cv	0	4.89	8.60	13.4	20.5	28.2	36.6	44.9	50.9	56.0	60.0	0.893
			Kv	0	4.23	7.43	11.6	17.8	24.4	31.7	38.8	44.0	48.4	51.9	----
			Xt	0	0.553	0.674	0.610	0.575	0.599	0.598	0.607	0.632	0.647	0.619	----
DN80/ NPS 3	38	Right	Cv	155.9	151.9	139.6	126.6	108.8	90.8	69.0	49.0	30.8	15.1	0	0.935
			Kv	134.9	131.4	120.7	109.5	94.1	78.5	59.7	42.4	26.6	13.1	0	----
			Xt	0.640	0.595	0.578	0.532	0.500	0.451	0.453	0.462	0.471	0.465	0	----
		Left	Cv	0	12.0	27.7	47.9	68.3	87.7	104.5	120.0	136.5	154.7	170.3	0.862
			Kv	0	10.4	24.0	41.4	59.1	75.8	90.4	103.8	118.1	133.8	147.3	----
			Xt	0	0.605	0.556	0.596	0.650	0.680	0.706	0.719	0.713	0.664	0.642	----
DN100/ NPS 4	38	Right	Cv	166.3	152.9	139.7	121.1	98.0	77.1	60.3	42.9	27.0	13.0	0	0.901
			Kv	143.9	132.3	120.8	104.8	84.8	66.7	52.2	37.1	23.3	11.2	0	----
			Xt	0.675	0.631	0.533	0.510	0.530	0.526	0.503	0.520	0.520	0.542	0	----
		Left	Cv	0	11.3	26.9	46.1	63.8	82.2	102.0	121.1	137.6	153.2	169.1	0.866
			Kv	0	9.8	23.2	39.9	55.2	71.1	88.2	104.8	119.0	132.5	146.3	----
			Xt	0	0.657	0.583	0.615	0.704	0.727	0.716	0.696	0.723	0.703	0.669	----
1. At maximum flow.															

1. At maximum flow.



GX 3-Way

Bottom Port Common (BPC) Converging
Linear

Catalog 12
February 2010 - Page GX 3-Way-4

Bottom Port Common (BPC) Converging														Linear Characteristic	
Valve Size	Maximum Travel	Inlet Port	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm			0 (Plug Down)	10	20	30	40	50	60	70	80	90	100 (Plug Up)	
DN25/ NPS 1	19	Right	Cv	16.4	14.4	12.8	11.7	10.7	9.64	8.58	6.27	3.80	1.08	0	0.973
			Kv	14.2	12.4	11.1	10.1	9.23	8.34	7.42	5.42	3.29	0.93	0	----
			Xt	0.668	0.650	0.691	0.571	0.495	0.397	0.324	0.312	0.291	0.652	0	----
		Left	Cv	0	1.45	2.56	3.93	5.46	7.08	8.83	10.9	13.3	15.3	16.5	0.935
			Kv	0	1.25	2.22	3.40	4.73	6.12	7.64	9.39	11.5	13.2	14.3	----
			Xt	0	0.702	0.784	0.725	0.720	0.710	0.722	0.717	0.678	0.609	0.597	----
DN40/ NPS 1–1/2	19	Right	Cv	36.8	32.3	25.6	21.3	17.5	12.5	10.3	8.22	4.63	2.34	0	0.804
			Kv	31.9	28.0	22.1	18.4	15.1	10.8	8.94	7.11	4.00	2.02	0	----
			Xt	0.540	0.538	0.675	0.661	0.613	0.723	0.690	0.575	0.595	0.634	0	----
		Left	Cv	0	3.36	5.99	9.42	13.3	17.4	22.4	27.4	33.8	37.5	41.5	0.878
			Kv	0	2.91	5.18	8.15	11.5	15.0	19.4	23.7	29.2	32.5	35.9	----
			Xt	0	0.625	0.659	0.593	0.598	0.645	0.637	0.695	0.643	0.641	0.603	----
DN50/ NPS 2	19	Right	Cv	59.9	50.9	42.8	35.6	29.6	23.1	17.5	13.8	9.75	6.01	0	0.882
			Kv	51.8	44.0	37.0	30.8	25.6	20.0	15.2	11.9	8.43	5.20	0	----
			Xt	0.560	0.569	0.609	0.634	0.611	0.613	0.571	0.490	0.387	0.256	0	----
		Left	Cv	0	4.84	8.90	14.2	19.2	25.4	32.8	40.0	47.1	53.4	57.8	0.935
			Kv	0	4.19	7.70	12.3	16.6	21.9	28.4	34.6	40.7	46.2	50.0	----
			Xt	0	0.504	0.575	0.549	0.641	0.692	0.696	0.693	0.707	0.722	0.723	----
DN80/ NPS 3	38	Right	Cv	158.7	142.5	125.3	102.8	80.3	61.0	45.8	33.1	20.8	10.6	0	0.813
			Kv	137.2	123.3	108.4	88.9	69.5	52.8	39.6	28.7	18.0	9.18	0	----
			Xt	0.558	0.578	0.553	0.549	0.600	0.663	0.665	0.653	0.714	0.705	0	----
		Left	Cv	0	12.1	25.7	43.8	63.1	83.1	102.7	120.4	135.7	151.1	164.9	0.931
			Kv	0	10.5	22.2	37.9	54.6	71.9	88.9	104.1	117.4	130.7	142.6	----
			Xt	0	0.525	0.579	0.619	0.660	0.658	0.676	0.685	0.701	0.691	0.670	----
DN100/ NPS 4	38	Right	Cv	155.9	145.0	127.4	107.6	85.9	66.4	49.4	35.6	23.6	12.2	0	0.810
			Kv	134.9	125.4	110.2	93.0	74.3	57.5	42.7	30.8	20.4	10.5	0	----
			Xt	0.564	0.550	0.518	0.504	0.545	0.593	0.628	0.621	0.601	0.553	0	----
		Left	Cv	0	13.5	28.9	48.9	69.5	90.6	111.1	129.2	145.4	159.9	174.4	0.830
			Kv	0	11.7	25.0	42.3	60.1	78.4	96.1	111.8	125.8	138.3	150.8	----
			Xt	0	0.427	0.477	0.525	0.553	0.564	0.590	0.637	0.667	0.686	0.676	----
1. At maximum flow.															

1. At maximum flow.

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2010; All Rights Reserved



HPAD, CL900 and 1500, Linear, Flow Down																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	29	1.5	Cv	---	3.32	13.8	26.5	37.7	46.3	52.8	58.0	62	64.3	0.88
					Kv	---	2.87	11.9	22.9	32.6	40.0	45.7	50.2	53.6	55.6	---
					XT	---	0.813	0.518	0.508	0.548	0.595	0.633	0.63	0.613	0.612	---
					Fd	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
3	47.6	1.875	29	1.5	Cv	---	3.32	13.8	26.5	37.7	46.3	52.8	58.0	62	64.3	0.88
					Kv	---	2.87	11.9	22.9	32.6	40.0	45.7	50.2	53.6	55.6	---
					XT	---	0.813	0.518	0.508	0.548	0.595	0.633	0.63	0.613	0.612	---
					Fd	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
4	73.0	2.875	50	2	Cv	---	8.72	31.5	55.1	74.6	89.4	101	110	117	121	0.93
					Kv	---	7.54	27.2	47.7	64.5	77.3	87.4	95.2	101	105	---
					XT	---	0.589	0.580	0.653	0.728	0.775	0.795	0.791	0.777	0.773	---
					Fd	0.48	0.28	0.21	0.17	0.15	0.13	0.12	0.11	0.11	0.10	---
6	92.1	3.625	50	2	Cv	6.91	26.4	54.7	86.4	117	143	165	182	194	201	0.91
					Kv	5.98	22.8	47.3	74.7	101	124	143	157	168	174	---
					XT	0.327	0.581	0.576	0.509	0.525	0.602	0.673	0.708	0.714	0.726	---
					Fd	0.28	0.21	0.15	0.13	0.11	0.098	0.090	0.082	0.077	0.073	---
8	136.5	5.375	76	3	Cv	8.78	63.3	149	231	298	350	385	408	424	425	0.91
					Kv	7.59	54.8	129	200	258	303	333	353	367	368	---
					XT	0.763	0.613	0.544	0.574	0.621	0.671	0.721	0.745	0.709	0.726	---
					Fd	0.24	0.12	0.094	0.076	0.067	0.058	0.054	0.050	0.047	0.046	---
HPAD, CL900 and 1500, Equal Percentage, Flow Down																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	29	1.125	Cv	---	1.13	3.51	7.94	13.8	20.7	29.0	37.3	42.6	48.8	0.87
					Kv	---	0.977	3.04	6.87	11.9	17.9	25.1	32.3	36.8	42.2	---
					XT	---	0.579	0.566	0.573	0.526	0.495	0.513	0.57	0.598	0.638	---
					Fd	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
3	47.6	1.875	29	1.125	Cv	---	1.13	3.51	7.94	13.8	20.7	29.0	37.3	42.6	48.8	0.87
					Kv	---	0.977	3.04	6.87	11.9	17.9	25.1	32.3	36.8	42.2	---
					XT	---	0.579	0.566	0.573	0.526	0.495	0.513	0.57	0.598	0.638	---
					Fd	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
4	73.0	2.875	38	1.5	Cv	---	1.21	4.21	11.3	23.0	37.6	53.2	69.5	85.3	92.7	0.92
					Kv	---	1.05	3.64	9.77	19.9	32.5	46.0	60.1	73.8	80.2	---
					XT	---	0.954	0.761	0.600	0.558	0.592	0.661	0.705	0.706	0.768	---
					Fd	1.00	0.54	0.44	0.31	0.23	0.19	0.17	0.15	0.14	0.13	---
6	92.1	3.625	38	1.5	Cv	3.12	7.35	13.9	23.4	37.9	60.1	90.6	123	147	165	0.85
					Kv	2.70	6.36	12.0	20.2	32.8	52.0	78.4	106	127	143	---
					XT	0.676	0.551	0.524	0.488	0.449	0.443	0.463	0.509	0.569	0.683	---
					Fd	---	0.43	0.33	0.24	0.18	0.15	0.13	0.11	0.096	0.088	---
8	136.5	5.375	63.5	2.5	Cv	3.90	13.3	23.1	36.2	63.0	105	156	217	280	319	0.82
					Kv	3.37	11.5	20.0	31.3	54.5	90.8	135	188	242	276	---
					XT	0.961	0.686	0.615	0.584	0.540	0.513	0.496	0.480	0.513	0.593	---
					Fd	0.38	0.34	0.25	0.20	0.15	0.12	0.098	0.084	0.073	0.066	---
1. At 100% travel.																

1. At 100% travel.

Notes: The coefficients on this page are also appropriate for the HPAT.



HPAD CL900 & 1500

Modified Equal Percentage Cages With or Without Liner
Flow Down through the Port

Catalog 12
July 2012 - Page HP-2

HPAD, CL900 and 1500, Modified Equal Percentage, Flow Down															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	Cv	---	2.45	7.82	16.5	26.2	35.8	45.1	52.8	57.1	61.1	0.90
					Kv	---	2.12	6.76	14.3	22.7	31.0	39.0	45.7	49.4	52.9	---
					XT	---	0.572	0.533	0.522	0.531	0.555	0.610	0.656	0.657	0.586	---
					Fd	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
3	47.6	1.875	38	1.5	Cv	---	2.45	7.82	16.5	26.2	35.8	45.1	52.8	57.1	61.1	0.90
					Kv	---	2.12	6.76	14.3	22.7	31.0	39.0	45.7	49.4	52.9	---
					XT	---	0.572	0.533	0.522	0.531	0.555	0.610	0.656	0.657	0.586	---
					Fd	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
4	73.0	2.875	50	2	Cv	0.475	3.07	11.8	26.8	46.6	69.3	89.5	100	103	114	0.95
					Kv	0.411	2.66	10.2	23.2	40.3	59.9	77.4	86.5	89.1	98.6	---
					XT	0.949	0.712	0.550	0.604	0.682	0.697	0.706	0.762	0.856	0.783	---
					Fd	0.78	0.49	0.31	0.22	0.18	0.15	0.14	0.12	0.11	0.11	---
6	92.1	3.625	50	2	Cv	4.33	11.3	23.3	45	79.6	121	155	176	192	203	0.99
					Kv	3.75	9.77	20.2	38.9	68.9	105.0	134	152	166	176	---
					XT	0.624	0.523	0.482	0.450	0.453	0.502	0.599	0.696	0.723	0.735	---
					Fd	0.29	0.34	0.24	0.18	0.13	0.11	0.094	0.084	0.077	0.073	---
8	136.5	5.375	76	3	Cv	5.22	16.6	30.8	55	100.0	168	241	299	351	378	0.89
					Kv	4.52	14.4	26.6	47.6	86.5	145.0	208	259	304	327	---
					XT	0.883	0.725	0.571	0.597	0.592	0.514	0.526	0.623	0.667	0.725	---
					Fd	0.43	0.28	0.22	0.16	0.12	0.095	0.079	0.068	0.060	0.057	---

1. At 100% travel.

Notes: The coefficients on this page are also appropriate for the HPAT.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

HPAD, CL2500, Linear, Flow Down															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	Cv	---	3.32	13.8	24.2	32.1	37.6	41.5	44.2	46.0	47.4	0.88
					Kv	---	2.87	11.9	20.9	27.8	32.5	35.9	38.2	39.8	41.0	---
					XT	---	0.813	0.518	0.672	0.716	0.766	0.816	0.851	0.862	0.832	---
					Fd	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPAD, CL2500, Equal Percentage, Flow Down															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	29	1.125	Cv	---	1.13	3.51	7.94	13.8	20.7	26.4	31.7	35.5	38.2	0.87
					Kv	---	0.977	3.04	6.87	11.9	17.9	22.8	27.4	30.7	33.0	---
					XT	---	0.579	0.566	0.573	0.526	0.495	0.589	0.669	0.747	0.848	---
					Fd	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
HPAD, CL2500, Modified Equal Percentage, Flow Down															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	Cv	---	2.45	7.82	16.5	24.9	32.2	37.3	40.6	42.8	44.3	0.90
					Kv	---	2.12	6.76	14.3	21.5	27.9	32.3	35.1	37.0	38.3	---
					XT	---	0.572	0.533	0.522	0.559	0.648	0.745	0.828	0.833	0.876	---
					Fd	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
1. At 100% travel.																

1. At 100% travel.

Notes: The coefficients on this page are also appropriate for the HPAT.

HPAD and HPAS CL900, 1500, & 2500

Whisper Trim™ III and Linear Cages
Flow Up through the Port

Catalog 12
July 2012 - Page HP-4

HPAD, CL900 and 1500, Whisper Trim, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ $\Delta P/P_1 \leq 0.6$	2	47.6	1.875	38	1.5	Cv	1.20	3.00	7.70	13.0	17.8	22.3	26.4	31.0	35.3	39.0	42.0
						Kv	1.04	2.59	6.66	11.2	15.4	19.3	22.8	26.8	30.5	33.7	36.3
						XT	0.576	0.522	0.609	0.611	0.617	0.614	0.625	0.616	0.614	0.619	0.615
	3	47.6	1.875	38	1.5	Cv	1.20	3.00	7.70	13.0	17.8	22.3	26.4	31.0	35.3	39.0	42.0
						Kv	1.04	2.59	6.66	11.2	15.4	19.3	22.8	26.8	30.5	33.7	36.3
						XT	0.576	0.522	0.609	0.611	0.617	0.614	0.625	0.616	0.614	0.619	0.615
	4	73	2.875	50	2	Cv	1.26	6.57	24.1	42.1	58.9	74.0	86.8	97.4	105	110	111
						Kv	1.09	5.68	20.8	36.4	50.9	64.0	75.1	84.3	90.8	95.2	96.0
						XT	0.826	0.727	0.610	0.560	0.558	0.588	0.641	0.687	0.723	0.738	0.772
	6	92.1	3.625	50	2	Cv	1.88	7.56	27.3	50.1	71.5	90.8	109	126	142	155	162
						Kv	1.63	6.54	23.6	43.3	61.8	78.5	94.3	109	123	134	140
						XT	0.538	0.625	0.586	0.545	0.519	0.520	0.542	0.577	0.614	0.640	0.674
	8	136.5	5.375	76	3	Cv	13.80	28.60	66.40	103.0	142	180	220	253.0	284.0	308.0	324.0
						Kv	11.9	24.7	57.4	89.1	123	156.0	190	219	246	266.0	280.0
						XT	0.478	0.423	0.513	0.533	0.525	0.557	0.535	0.543	0.560	0.598	0.627

HPAD, CL2500, Whisper Trim, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ $\Delta P/P_1 \leq 0.6$	2	47.6	1.875	38	1.5	Cv	1.20	3.00	7.70	13.0	17.8	22.3	26.4	28.7	31.4	34.0	36.2
						Kv	1.04	2.59	6.66	11.2	15.4	19.3	22.8	24.8	27.2	29.4	31.3
						XT	0.576	0.522	0.609	0.611	0.586	0.576	0.562	0.597	0.595	0.592	0.584

1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result.
2. Larger capacities may be available with level A1 cages depending on service conditions.

Notes: The coefficients in this table are also appropriate for the HPAT.

HPAS, CL900 and 1500, Linear, Flow Up															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _v	---	3.61	11.8	23.3	35.2	45.7	54.2	61.7	68.8	73.6	0.97
					K _v	---	3.12	10.2	20.2	30.4	39.5	46.9	53.4	59.5	63.7	---
					X _T	---	0.722	0.663	0.657	0.663	0.663	0.659	0.638	0.606	0.586	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPAS, CL2500, Linear, Flow Up															Linear Characteristic	
2	47.6	1.875	38	1.5	C _v	---	3.61	11.8	23.3	33.8	41.0	46.5	50.7	53.8	56.2	0.97
					K _v	---	3.12	10.2	20.2	29.2	35.5	40.2	43.9	46.5	48.6	---
					X _T	---	0.722	0.663	0.657	0.623	0.607	0.589	0.576	0.573	0.565	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
1. At 100% travel.																

HPAS, CL2500, Linear, Flow Up															Linear Characteristic	
2	47.6	1.875	38	1.5	C _V	---	3.61	11.8	23.3	33.8	41.0	46.5	50.7	53.8	56.2	0.97
					K _V	---	3.12	10.2	20.2	29.2	35.5	40.2	43.9	46.5	48.6	---
					X _T	---	0.722	0.663	0.657	0.623	0.607	0.589	0.576	0.573	0.565	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
1. At 100% travel.																

1. At 100% travel.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com



HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _v	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _v	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
2	19.1	0.75	19	0.75	C _v	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _v	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
2	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _v	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	21.0	0.81
					K _v	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	18.2	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _v	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	27.0	31.0	0.81
					K _v	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	23.4	26.8	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
	38.1	1.5	38	1.5	C _v	---	0.880	2.80	6.30	13.5	22.5	31.0	38.0	43.5	48.0	0.81
					K _v	---	0.761	2.42	5.45	11.7	19.5	26.8	32.9	37.6	41.5	---
					X _T	---	0.682	0.670	0.677	0.678	0.703	0.698	0.684	0.703	0.703	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.
2. Characteristic is equal percentage through 75% of travel.

HPAS CL2500

Equal Percentage Cages Without Liner
Flow Down through the Port

Catalog 12
July 2012 - Page HP-6

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _v	---	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.38	0.87
					K _v	---	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.662	0.658	0.653	0.648	---
2	19.1	0.75	19	0.75	C _v	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _v	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.964	0.688	0.709	0.715	0.600	0.542	0.574	0.580	0.584	0.469	---
2	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _v	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	21.0	0.81
					K _v	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	18.2	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _v	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	27.0	31.0	0.81
					K _v	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	23.4	26.8	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
	38.1	1.5	38	1.5	C _v	---	0.880	2.80	6.30	12.9	21.0	27.2	31.6	34.7	36.8	0.81
					K _v	---	0.761	2.42	5.45	11.2	18.2	23.5	27.3	30.0	31.8	---
					X _T	---	0.682	0.670	0.677	0.740	0.709	0.713	0.717	0.720	0.722	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.
2. Characteristic is equal percentage through 75% of travel.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _v	0.200	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.37	0.87
					K _v	0.173	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	0.563	0.714	0.702	0.642	0.677	0.657	0.658	0.650	0.644	0.641	---
2	19.1	0.75	19	0.75	C _v	0.200	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _v	0.173	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	0.563	0.714	0.702	0.642	0.677	0.657	0.669	0.649	0.660	0.651	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.952	0.680	0.700	0.706	0.593	0.535	0.570	0.574	0.577	0.464	---
2	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.952	0.680	0.700	0.706	0.690	0.682	0.680	0.633	0.525	0.450	---
	25.4	1	29	1.125	C _v	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	20.0	0.81
					K _v	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	17.3	---
					X _T	---	0.681	0.658	0.682	0.684	0.659	0.639	0.678	0.638	0.682	---
	31.8	1.25	29	1.125	C _v	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	25.7	27.9	0.81
					K _v	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	22.2	24.1	---
					X _T	---	0.660	0.676	0.675	0.658	0.686	0.684	0.640	0.659	0.663	---
	38.1	1.5	38	1.5	C _v	---	0.880	2.80	6.30	13.2	21.2	27.6	33.1	37.4	40.8	0.81
					K _v	---	0.761	2.42	5.45	11.4	18.3	23.9	28.6	32.4	35.3	---
					X _T	---	0.674	0.662	0.669	0.670	0.695	0.690	0.691	0.689	0.694	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.
2. Characteristic is equal percentage through 75% of travel.

HPAS CL2500

Equal Percentage Cages With Liner
Flow Down through the Port

Catalog 12
July 2012 - Page HP-8

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _v	0.200	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.37	0.87
					K _v	0.173	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	0.569	0.722	0.711	0.649	0.685	0.664	0.665	0.658	0.653	0.648	---
2	19.1	0.75	19	0.75	C _v	0.200	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _v	0.173	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	0.569	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.964	0.688	0.709	0.715	0.600	0.542	0.574	0.580	0.584	0.469	---
2	19.1	0.75	29	1.125	C _v	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _v	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _v	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	20.0	0.81
					K _v	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	17.3	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _v	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	25.7	27.9	0.81
					K _v	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	22.2	24.1	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
	38.1	1.5	38	1.5	C _v	---	0.880	2.80	6.30	12.9	21.0	27.2	30.0	31.2	31.3	0.81
					K _v	---	0.761	2.42	5.45	11.2	18.2	23.5	25.9	27.0	27.1	---
					X _T	---	0.682	0.670	0.677	0.743	0.707	0.714	0.716	0.716	0.726	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.
2. Characteristic is equal percentage through 75% of travel.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

Catalog 12

July 2012 - Page HP-9

Micro-Flute, CL900 and 1500
Micro-Flat Anti-Cavitation CL900, 1500, and 2500 With or Without Liner

HPAS, CL900 and 1500, Micro-Flute, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	9.5	0.375	19	0.75	C _v	0.066	0.121	0.200	0.314	0.470	0.674	0.945	1.30	1.74	2.24	0.81
					K _v	0.057	0.105	0.173	0.272	0.407	0.583	0.817	1.12	1.51	1.94	---
					X _T	0.944	0.744	0.652	0.600	0.586	0.585	0.583	0.584	0.582	0.585	---
	12.7	0.5	19	0.75	C _v	0.105	0.184	0.314	0.488	0.716	1.04	1.53	2.30	3.20	4.21	0.84
					K _v	0.091	0.159	0.272	0.422	0.619	0.900	1.32	1.99	2.77	3.64	---
					X _T	0.974	0.792	0.654	0.638	0.630	0.580	0.547	0.497	0.523	0.549	---
HPAS, CL900 and 1500, Micro-Flute, Flow Down With or Without Liner															Equal Percentage Characteristic	
1 and 2	6.4 1 Flute	0.25 1 Flute	19	0.75	C _v	0.0290	0.0377	0.0470	0.0624	0.0874	0.124	0.175	0.243	0.330	0.407	0.62
					K _v	0.025	0.033	0.041	0.054	0.076	0.107	0.151	0.210	0.285	0.352	---
					X _T	0.990	0.975	0.867	0.765	0.659	0.569	0.494	0.450	0.450	0.550	---
	12.7 1 Flute	0.5 1 Flute	19	0.75	C _v	0.078	0.090	0.116	0.161	0.228	0.320	0.445	0.641	0.950	1.40	0.72
					K _v	0.067	0.078	0.100	0.139	0.197	0.277	0.385	0.554	0.822	1.211	---
					X _T	0.995	0.990	0.986	0.932	0.846	0.775	0.719	0.653	0.581	0.537	---
	12.7 2 Flutes	0.5 2 Flutes	19	0.75	C _v	0.128	0.161	0.257	0.394	0.539	0.700	0.947	1.38	2.07	2.93	0.71
					K _v	0.111	0.139	0.222	0.341	0.466	0.605	0.819	1.19	1.79	2.53	---
					X _T	0.678	0.736	0.552	0.484	0.516	0.586	0.610	0.556	0.490	0.488	---
1. At 100% travel.																

1. At 100% travel.

HPAS, CL900, 1500, and 2500, Micro-Flat Anti-Cavitation, Flow Down With or Without Liner															Linear Characteristic	
Valve Size, NPS	Port Diameter ⁽²⁾		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1 and 2	9.5 2 Flats	0.375 2 Flats	19	0.75	C _v	0.010	0.017	0.077	0.162	0.264	0.381	0.510	0.651	0.801	0.961	0.82
					K _v	0.009	0.015	0.067	0.140	0.228	0.330	0.441	0.563	0.693	0.831	---
					X _T	0.648	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	---
	12.7 2 Flats	0.5 2 Flats	19	0.75	C _v	0.027	0.031	0.144	0.301	0.491	0.708	0.947	1.21	1.48	1.71	0.82
					K _v	0.023	0.027	0.125	0.260	0.425	0.612	0.819	1.05	1.28	1.48	---
					X _T	0.703	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	---
	19.1 2 Flats	0.75 2 Flats	19	0.75	C _v	0.067	0.095	0.224	0.452	0.770	1.14	1.51	2.00	2.50	2.92	0.82
					K _v	0.058	0.082	0.194	0.391	0.666	0.986	1.31	1.73	2.16	2.53	---
					X _T	0.931	0.929	0.919	0.905	0.830	0.783	0.800	0.751	0.726	0.681	---
2	25.4 2 Flats	1 2 Flats	29	1.125	C _v	0.018	0.237	0.728	1.40	2.18	3.05	4.06	5.26	6.58	7.61	0.81
					K _v	0.016	0.205	0.630	1.21	1.89	2.64	3.51	4.55	5.69	6.58	---
					X _T	0.911	0.763	0.676	0.671	0.680	0.679	0.659	0.615	0.579	0.588	---

1. At 100% travel.

2. Micro-Flat Anti-Cavitation trims use a shutoff port diameter which is 0.125 inch larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing.

Note: If ΔP exceeds 1000 psig, the life span of the Micro-Flat trim may be shortened.



HPAS

CL900 and 1500

Micro-Form Valve Plug
Flow Up through the Port

Catalog 12
July 2012 - Page HP-10

HPAS, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---
2	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---
1. At 100% travel.																

1. At 100% travel.

HPAS, Micro-Form, Flow Up														Modified Equal Percentage Characteristic		
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _v	0.610	1.10	1.79	3.01	5.75	9.07	11.2	12.1	13.4	14.5	0.95
					K _v	0.528	0.952	1.55	2.60	4.97	9.07	9.69	10.5	11.6	12.5	---
					X _T	0.563	0.559	0.567	0.567	0.567	0.567	0.567	0.567	0.555	0.567	---
	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	9.22	12.4	14.6	16.1	18.2	19.5	0.89
					K _v	0.842	1.61	2.75	5.07	7.98	10.7	12.6	13.9	15.7	16.9	---
					X _T	0.680	0.634	0.568	0.571	0.571	0.571	0.571	0.571	0.567	0.571	---
2	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	10.5	16.6	21.8	24.8	26.3	27.5	0.89
					K _v	0.842	1.61	2.75	5.07	9.08	14.4	18.9	21.5	22.7	23.8	---
					X _T	0.680	0.634	0.568	0.571	0.591	0.635	0.667	0.660	0.602	0.553	---
	38.1	1.25	29	1.125	C _v	1.09	1.87	3.89	8.77	17.4	26.4	31.6	34.6	40.6	47.6	0.98
					K _v	0.943	1.62	3.36	7.59	15.1	22.8	27.3	29.9	35.1	41.2	---
					X _T	0.702	0.630	0.524	0.547	0.653	0.729	0.753	0.761	0.659	0.479	---
	31.8	1.5	38	1.5	C _v	2.43	4.43	9.01	17.2	27.9	37.5	44.2	50.0	56.9	58.3	0.97
					K _v	2.10	3.83	7.79	14.9	24.1	32.4	38.2	43.3	49.2	50.4	---
					X _T	0.619	0.520	0.499	0.583	0.691	0.749	0.758	0.723	0.640	0.623	---
1. At 100% travel.																

1. At 100% travel.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com



Catalog 12

July 2012 - Page HP-11

 Micro-Form Valve Plug
Flow Up through the Port

HPAS, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.37	10.9	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.11	9.43	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.670	0.737	---
2	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---
	25.4	1	19	0.75	C _v	0.927	1.35	1.87	2.64	3.88	5.81	8.66	12.6	16.6	18.9	0.91
					K _v	0.802	1.17	1.62	2.28	3.36	5.03	7.49	10.9	14.4	16.3	---
					X _T	0.431	0.636	0.594	0.603	0.615	0.600	0.566	0.540	0.581	0.676	---
1. At 100% travel.																

1. At 100% travel.

HPAS, Micro-Form, Flow Up														Modified Equal Percentage Characteristic		
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	8.94	11.9	13.9	14.1	14.2	14.3	0.89
					K _v	0.842	1.61	2.75	5.07	7.73	10.3	12.0	12.2	12.3	12.4	---
					X _T	0.680	0.634	0.568	0.571	0.568	0.569	0.569	0.569	0.569	0.569	---
2	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	10.5	16.1	20.7	23.3	24.6	25.6	0.89
					K _v	0.842	1.61	2.75	5.07	9.08	13.9	17.9	20.2	21.3	22.1	---
					X _T	0.680	0.634	0.568	0.571	0.591	0.635	0.669	0.661	0.601	0.559	---
	31.8	1.25	29	1.125	C _v	1.09	1.87	3.89	8.77	16.9	24.6	29.1	31.1	34.5	36.6	0.98
					K _v	0.943	1.62	3.36	7.59	14.6	21.3	25.2	26.9	29.8	31.7	---
					X _T	0.702	0.630	0.524	0.547	0.651	0.734	0.747	0.763	0.655	0.614	---
	38.1	1.5	38	1.5	C _v	2.43	4.43	9.01	16.7	25.9	32.6	35.4	38.5	41.0	43.0	0.97
					K _v	2.10	3.83	7.79	14.4	22.4	28.2	30.6	33.3	35.5	37.2	---
					X _T	0.619	0.520	0.499	0.581	0.693	0.747	0.751	0.721	0.646	0.587	---
1. At 100% travel.																

1. At 100% travel.



HPAS, CL900 and 1500, Whisper Trim III, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Mini- mum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.00	2.50	7.50	12.8	17.7	22.3	26.6	31.2	35.5	39.5	42.6
						K _V	0.865	2.16	6.49	11.1	15.3	19.3	23.0	27.0	30.7	34.2	36.8
						X _T	0.727	0.686	0.605	0.609	0.613	0.607	0.613	0.606	0.607	0.603	0.607
HPAS, CL2500, Whisper Trim III, Flow Up																	Linear Characteristic
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.00	2.50	7.50	12.8	17.7	22.3	26.6	28.7	31.4	34.0	36.2
						K _V	0.865	2.16	6.49	11.1	15.3	19.3	23.0	24.8	27.2	29.4	31.3
						X _T	0.727	0.686	0.605	0.609	0.593	0.576	0.554	0.597	0.595	0.592	0.595
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																	

HPAS, CL900 and 1500, Cavitrol III, Flow Down																		Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling $C_v^{(1)}$	Valve Opening—Percent of Total Travel										$F_L^{(2)}$
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
Two Stage	1	22.2	0.875	38	1.5	C_v	0.360	---	0.836	1.80	2.74	3.64	4.51	5.36	6.18	6.91	7.39	0.98
						K_v	0.311	---	0.723	1.56	2.37	3.15	3.90	4.64	5.35	5.98	6.39	---
Three Stage	2	25.4	1	50	2	C_v	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99
						K_v	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---
HPAS, CL2500, Cavitrol III, Flow Down																		Linear Characteristic
Two Stage	1	22.2	0.875	38	1.5	C_v	0.360	---	0.836	1.80	2.74	3.64	4.51	5.36	5.87	6.53	6.91	0.98
						K_v	0.311	---	0.723	1.56	2.37	3.15	3.90	4.64	5.08	5.65	5.98	---
Three Stage	2	25.4	1	50	2	C_v	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99
						K_v	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---
1. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period. Erosion damage to the valve seats may result. 2. At 100% travel.																		

HPAT, CL900 and 1500, Cavitrol™ III, Flow Down																	Linear Characteristic	
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling C _v ⁽¹⁾	Valve Opening—Percent of Total Travel										F _L ⁽²⁾
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
Two Stage	2	44.4	1.75	50	2	C _v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.0	11.7	13.0	14.0	0.98
						K _v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---
	3	44.4	1.75	50	2	C _v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98
						K _v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---
	4	63.5	2.5	64	2.5	C _v	0.720	1.46	4.98	9.24	13.2	17.0	20.7	24.7	28.5	31.9	34.4	0.98
						K _v	0.623	1.26	4.31	7.99	11.4	14.7	17.9	21.4	24.7	27.6	29.8	---
	6	87.3	3.4375	76	3	C _v	0.900	2.61	9.01	15.6	21.8	28.3	34.8	40.4	46.4	52.2	58.1	0.98
						K _v	0.778	2.26	7.79	13.5	18.9	24.5	30.1	34.9	40.1	45.2	50.3	---
	8	133.3	5.25	102	4	C _v	1.72	7.50	20.7	33.8	47.0	60.1	73.3	87.0	100	112	123	0.98
						K _v	1.49	6.49	17.9	29.2	40.7	52.0	63.4	75.3	86.5	96.9	106	---
Three Stage	4	47.6	1.875	64	2.5	C _v	1.20	0.747	2.02	3.92	6.15	8.01	9.5	11.0	12.8	14.9	16.5	0.99
						K _v	1.04	0.646	1.75	3.39	5.32	6.93	8.2	9.52	11.1	12.9	14.3	---
	6	73.0	2.875	76	3	C _v	1.70	2.80	5.50	8.30	11.0	13.9	16.7	19.4	22.2	25.0	27.8	0.99
						K _v	1.47	2.42	4.76	7.18	9.52	12.0	14.4	16.8	19.2	21.6	24.0	---
	8	115.9	4.5625	102	4	C _v	3.10	6.10	13.2	19.8	26.1	34.1	41.5	48.2	54.5	60.9	65.0	0.99
						K _v	2.68	5.28	11.4	17.1	22.6	29.5	35.9	41.7	47.1	52.7	56.2	---
HPAT, CL2500, Cavitrol III, Flow Down																	Linear Characteristic	
Three Stage	2	44.4	1.75	50	2	C _v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98
						K _v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---
1. Valves should not be required to throttle at a C _v less than the specified minimum C _v for an extended period. Erosion damage to the valve seats may result. 2. At 100% travel.																		

1. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period. Erosion damage to the valve seats may result.
2. At 100% travel.

HPD, CL900 and 1500, Linear															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _v	---	3.49	12.5	22.9	31.8	38.4	43.0	46.7	49.9	52.2	0.91
					K _v	---	3.02	10.8	19.8	27.5	33.2	37.2	40.4	43.2	45.2	---
					X _T	---	0.811	0.632	0.682	0.743	0.829	0.780	0.743	0.726	0.695	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
3	73.0	2.875	50	2	C _v	---	8.72	31.5	55.1	74.6	89.4	101	110	117	121	0.93
					K _v	---	7.54	27.2	47.7	64.5	77.3	87.4	95.2	101	105	---
					X _T	---	0.589	0.580	0.653	0.728	0.775	0.795	0.791	0.777	0.773	---
					F _d	0.48	0.28	0.21	0.17	0.15	0.13	0.12	0.11	0.11	0.10	---
4	92.1	3.625	50	2	C _v	6.91	26.4	54.7	86.4	117	143	165	182	194	201	0.91
					K _v	5.98	22.8	47.3	74.7	101	124	143	157	168	174	---
					X _T	0.327	0.581	0.576	0.509	0.525	0.602	0.673	0.708	0.714	0.726	---
					F _d	0.28	0.21	0.15	0.13	0.11	0.098	0.090	0.082	0.077	0.073	---
6	136.5	5.375	76	3	C _v	8.78	63.3	149	231	298	350	385	408	424	425	0.91
					K _v	7.59	54.8	129	200	258	303	333	353	367	368	---
					X _T	0.763	0.613	0.544	0.574	0.621	0.671	0.721	0.745	0.709	0.726	---
					F _d	0.24	0.12	0.094	0.076	0.067	0.058	0.054	0.050	0.047	0.046	---
HPD, CL900 and 1500, Equal Percentage															Equal Percentage Characteristic	
2	47.6	1.875	29	1.125	C _v	---	1.02	3.26	7.53	13.3	19.8	26.4	32.0	36.2	41.0	0.93
					K _v	---	0.882	2.82	6.51	11.5	17.1	22.8	27.7	31.3	35.5	---
					X _T	---	0.745	0.619	0.595	0.587	0.593	0.633	0.721	0.791	0.791	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
3	73.0	2.875	38	1.5	C _v	---	1.21	4.21	11.3	23.0	37.6	53.2	69.5	85.3	92.7	0.92
					K _v	---	1.05	3.64	9.77	19.9	32.5	46.0	60.1	73.8	80.2	---
					X _T	---	0.954	0.761	0.600	0.558	0.592	0.661	0.705	0.706	0.768	---
					F _d	1.00	0.54	0.44	0.31	0.23	0.19	0.17	0.15	0.14	0.13	---
4	92.1	3.625	38	1.5	C _v	3.12	7.35	13.9	23.4	37.9	60.1	90.6	123	147	165	0.85
					K _v	2.70	6.36	12.0	20.2	32.8	52.0	78.4	106	127	143	---
					X _T	0.676	0.551	0.524	0.488	0.449	0.443	0.463	0.509	0.569	0.683	---
					F _d	---	0.43	0.33	0.24	0.18	0.15	0.13	0.11	0.096	0.088	---
6	136.5	5.375	63.5	2.5	C _v	3.90	13.3	23.1	36.2	63.0	105	156	217	280	319	0.82
					K _v	3.37	11.5	20.0	31.3	54.5	90.8	135	188	242	276	---
					X _T	0.961	0.686	0.615	0.584	0.540	0.513	0.496	0.480	0.513	0.593	---
					F _d	0.38	0.34	0.25	0.20	0.15	0.12	0.098	0.084	0.073	0.066	---
HPD, CL900 and 1500, Modified Equal Percentage ⁽²⁾															Modified Equal Percentage Characteristic	
2	47.6	1.875	38	1.5	C _v	---	2.28	7.52	15.7	24.1	31.6	38.2	43.5	46.7	49.0	0.93
					K _v	---	1.97	6.50	13.6	20.8	27.3	33.0	37.6	40.4	42.4	---
					X _T	---	0.641	0.571	0.584	0.634	0.698	0.778	0.803	0.771	0.770	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
3	73.0	2.875	50	2	C _v	0.475	3.07	11.8	26.8	46.6	69.3	89.5	100	103	114	0.95
					K _v	0.411	2.66	10.2	23.2	40.3	59.9	77.4	86.5	89.1	98.6	---
					X _T	0.949	0.712	0.550	0.604	0.682	0.697	0.706	0.762	0.856	0.783	---
					F _d	0.78	0.49	0.31	0.22	0.18	0.15	0.14	0.12	0.11	0.11	---
4	92.1	3.625	50	2	C _v	4.33	11.3	23.3	45.0	79.6	121	155	176	192	203	0.89
					K _v	3.75	9.77	20.2	38.9	68.9	105	134	152	166	176	---
					X _T	0.624	0.523	0.482	0.450	0.453	0.502	0.599	0.696	0.723	0.735	---
					F _d	0.29	0.34	0.24	0.18	0.13	0.11	0.094	0.084	0.077	0.073	---
6	136.5	5.375	76	3	C _v	5.22	16.6	30.8	55.0	100	168	241	299	351	378	0.89
					K _v	4.52	14.4	26.6	47.6	86.5	145	208	259	304	327	---
					X _T	0.883	0.725	0.571	0.597	0.592	0.514	0.526	0.623	0.667	0.725	---
					F _d	0.43	0.28	0.22	0.16	0.12	0.095	0.079	0.068	0.060	0.057	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.
2. Characteristic is equal percentage through 75% of travel.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Cavtrol are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com



Catalog 12

October 2012 - Page HP-15

Linear and Equal Percentage Cages
Flow Down through the Port

HPD, CL2500, Linear															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	25.4	1	C _v	0.686	0.937	4.03	10.1	17.3	24.0	29.0	32.6	35.5	37.9	0.81
					K _v	0.593	0.811	3.49	8.74	15.0	20.8	25.1	28.2	30.7	32.8	---
					X _T	0.888	0.675	0.533	0.566	0.616	0.656	0.702	0.733	0.747	0.722	---
HPD, CL2500, Equal Percentage															Equal Percentage Characteristic	
2	47.6	1.875	25.4	1	C _v	0.596	1.09	2.58	5.61	10.1	15.4	20.9	26.2	30.8	34.7	0.83
					K _v	0.516	0.943	2.23	4.85	8.74	13.3	18.1	22.7	26.6	30.0	---
					X _T	0.816	0.667	0.631	0.602	0.588	0.594	0.633	0.686	0.721	0.719	---
HPD, CL2500, Modified Equal Percentage															Modified Equal Percentage Characteristic	
2	47.6	1.875	28.6	1.125	C _v	0.622	1.34	3.52	7.73	13.4	19.5	25.5	31.0	34.7	38.0	0.81
					K _v	0.538	1.16	3.04	6.69	11.6	16.9	22.1	26.8	30.0	32.9	---
					X _T	0.667	0.664	0.640	0.570	0.586	0.635	0.669	0.712	0.757	0.707	---

1. At 100% travel.

1. At 100% travel.



HPD

CL900, 1500, and 2500

Whisper Trim™ III Cages
Flow Up through the Port

Catalog 12

October 2012 - Page HP-16

HPD, Whisper Trim III--CL900 and 1500, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	1.20	3.00	7.70	13.0	17.8	22.3	26.4	31.0	35.3	39.0	42.0
						K _v	1.04	2.59	6.66	11.2	15.4	19.3	22.8	26.8	30.5	33.7	36.3
						X _T	0.569	0.516	0.602	0.604	0.610	0.607	0.618	0.608	0.607	0.612	0.608
	3	73.0	2.875	50	2	C _v	1.26	6.57	24.1	42.1	58.9	74.0	86.8	97.4	105	110	111
						K _v	1.09	5.68	20.8	36.4	50.9	64.0	75.1	84.3	90.8	95.2	96.0
						X _T	0.826	0.727	0.610	0.560	0.558	0.641	0.687	0.723	0.738	0.772	
	4	92.1	3.625	50	2	C _v	1.88	7.56	27.3	50.1	71.5	90.8	109	126	142	155	162
						K _v	1.63	6.54	23.6	43.3	61.8	78.5	94.3	109	123	134	140
						X _T	0.538	0.625	0.586	0.545	0.519	0.520	0.542	0.577	0.614	0.640	0.674
	6	136.5	5.375	76	3	C _v	13.8	28.6	66.4	103	142	180	220	253	284	308	324
						K _v	11.9	24.7	57.4	89.1	123	156	190	219	246	266	280
						X _T	0.478	0.423	0.513	0.533	0.525	0.557	0.535	0.543	0.560	0.598	0.627
HPD, Whisper Trim III--CL2500, Flow Up																	Linear Characteristic
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	---	3.1	8.4	13.1	17.3	21.4	25.1	28.3	30.8	32.9	34.9
						K _v	---	2.68	7.27	11.3	15.0	18.5	21.7	24.5	26.6	28.5	30.2
						X _T	0.569	0.516	0.602	0.604	0.610	0.607	0.618	0.608	0.607	0.612	0.608
HPD, Whisper Trim III--CL900 and 1500, Flow Up																	Linear Characteristic
B1 ΔP/P1≤.75	3	73.0	2.875	50	2	C _v	0.796	3.00	9.00	14.4	18.6	23.4	28.5	34.6	40.2	45.0	48.8
						K _v	0.689	2.59	7.79	12.5	16.1	20.2	24.7	29.9	34.8	38.9	42.2
						X _T	0.796	0.615	0.618	0.592	0.622	0.622	0.633	0.620	0.624	0.622	0.622
B3 ΔP/P1≤.75	4	92.1	3.625	50	2	C _v	3.50	8.00	20.0	30.0	40.0	52.0	62.0	73.0	82.0	88.9	88.9
						K _v	3.03	6.92	17.3	25.9	34.6	45.0	53.6	63.1	70.9	76.9	76.9
						X _T	0.617	0.591	0.531	0.524	0.517	0.513	0.509	0.517	0.527	0.522	0.522
B3 ΔP/P1≤.75	6	136.5	5.375	76	3	F _d	---	0.13	0.087	0.062	0.053	0.048	0.042	0.039	0.036	0.034	0.034
						C _v	8.00	13	30	50	69	87	107	125	143	160	166
						K _v	6.92	11.2	25.9	43.3	59.7	75.3	92.6	108	124	138	144
C3	4	92.1	3.625	50	2	X _T	0.610	0.577	0.580	0.548	0.552	0.563	0.545	0.554	0.552	0.555	0.554
						F _d	---	0.087	0.051	0.042	0.034	0.031	0.028	0.026	0.024	0.022	0.022
						C _v	3.50	8.00	15.0	21.5	28.0	34.4	41.0	47.3	53.5	56.5	56.8
C3	6	136.5	5.375	76	3	K _v	3.03	6.92	13.0	18.6	24.2	29.8	35.5	40.9	46.3	48.9	49.1
						X _T	0.617	0.526	0.516	0.530	0.530	0.539	0.535	0.540	0.538	0.540	0.540
						F _d	---	0.14	0.11	0.079	0.064	0.060	0.053	0.047	0.046	0.042	0.042
C3	4	73.0	2.875	50	2	C _v	8.00	8.30	20.5	33.0	44.3	57.0	69.0	83.0	96.5	108	112
						K _v	6.92	7.18	17.7	28.5	38.3	49.3	59.7	71.8	83.5	93.4	96.9
						X _T	0.563	0.567	0.575	0.572	0.572	0.556	0.568	0.563	0.561	0.559	0.563
D3	6	111.1	4.375	76	3	F _d	---	0.093	0.067	0.051	0.045	0.039	0.036	0.032	0.031	0.029	0.028
						C _v	2.30	4.00	7.90	11.5	15.2	18.8	22.8	27.0	30.8	33.7	37.1
						K _v	1.99	3.46	6.83	9.95	13.1	16.3	19.7	23.4	26.6	29.2	32.1
D3	4	73.0	2.875	50	2	X _T	0.554	0.517	0.525	0.540	0.526	0.533	0.536	0.534	0.530	0.533	0.530
						C _v	2.30	7.00	14.0	20.7	28.0	34.8	41.6	48.5	55.7	62.5	69.6
						K _v	1.99	6.05	12.1	17.9	24.2	30.1	36.0	42.0	48.2	54.1	60.2
D3	6	111.1	4.375	76	3	X _T	0.579	0.563	0.557	0.572	0.557	0.569	0.564	0.566	0.562	0.564	
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																	

1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result.
2. Larger capacities may be available with level A1 cages depending on service conditions.

Notes: The coefficients on this page are also appropriate for the HPT.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com



HPS, CL900 and 1500, Flow Up															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _V	---	3.56	11.7	23.0	33.9	42.3	47.5	50.7	53.4	54.6	0.98
					K _V	---	3.08	10.1	19.9	29.3	36.6	41.1	43.9	46.2	47.2	---
					X _T	---	0.767	0.681	0.658	0.666	0.693	0.718	0.728	0.719	0.711	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPS, CL2500, Flow Up															Linear Characteristic	
2	47.6	1.875	25	1	C _V	0.645	0.996	3.51	8.74	15.9	23.5	30.0	34.3	37.0	40.9	>0.96
					K _V	0.558	0.862	3.04	7.56	13.8	20.3	26.0	29.7	32.0	35.4	---
					X _T	0.905	0.813	0.715	0.701	0.703	0.704	0.701	0.699	0.699	0.710	---
HPS, CL900 and 1500, Flow Up															Equal Percentage Characteristic	
2	47.6	1.875	29	1.125	C _V	---	1.09	3.04	6.77	12.2	18.9	26.7	34.5	40.5	45.8	0.92
					K _V	---	0.943	2.63	5.86	10.6	16.3	23.1	29.8	35.0	39.6	---
					X _T	---	0.357	0.670	0.717	0.670	0.629	0.598	0.597	0.632	0.652	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
HPS, CL2500, Flow Up															Equal Percentage Characteristic	
2	47.6	1.875	25	1	C _V	0.653	0.977	2.35	5.14	9.18	14.2	20.1	26.2	30.7	35.7	>0.96
					K _V	0.565	0.845	2.03	4.45	7.94	12.3	17.4	22.7	26.6	30.9	---
					X _T	0.997	0.912	0.785	0.708	0.680	0.690	0.733	0.763	0.768	0.751	---
HPS, CL900 and 1500, Flow Up															Modified Equal Percentage Characteristic	
2	47.6	1.875	38	1.5	C _V	---	2.19	6.69	14.5	24.1	33.7	42.4	48.9	51.9	54.4	0.95
					K _V	---	1.89	5.79	12.5	20.8	29.2	36.7	42.3	44.9	47.1	---
					X _T	---	0.594	0.741	0.648	0.592	0.602	0.641	0.660	0.663	0.670	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
HPS, CL2500, Flow Up															Modified Equal Percentage Characteristic	
2	47.6	1.875	29	1.125	C _V	0.654	1.21	3.18	7.07	12.4	18.4	25.1	31.5	35.6	40.0	>0.96
					K _V	0.566	1.05	2.75	6.12	10.7	15.9	21.7	27.2	30.8	34.6	---
					X _T	0.998	0.595	0.430	0.374	0.370	0.413	0.471	0.526	0.571	0.689	---
1. At 100% travel.																

1. At 100% travel.



HPS, Micro-Flute, CL900, 1500, and 2500

HPS, Micro-Form, CL900 and 1500

Catalog 12

Flow Up through the Port

October 2012 - Page HP-18

HPS, CL900, 1500, and 2500, Micro-Flute, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4 1 Flute	0.25 1 Flute	19	0.75	C _V	0.039	0.046	0.056	0.072	0.094	0.124	0.162	0.212	0.278	0.354	0.87
					K _V	0.034	0.040	0.048	0.062	0.081	0.107	0.140	0.183	0.240	0.306	---
					X _T	0.778	0.734	0.690	0.653	0.642	0.635	0.637	0.634	0.632	0.656	---
	6.4 3 Flutes	0.25 3 Flutes	19	0.75	C _V	0.053	0.073	0.101	0.146	0.216	0.312	0.433	0.588	0.802	1.07	0.90
					K _V	0.046	0.063	0.087	0.126	0.187	0.270	0.375	0.509	0.694	0.926	---
					X _T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624	---
	12.7	0.5	19	0.75	C _V	0.105	0.184	0.314	0.488	0.716	1.04	1.53	2.30	3.20	4.21	0.84
					K _V	0.091	0.159	0.272	0.422	0.619	0.900	1.32	1.99	2.77	3.64	---
					X _T	0.974	0.792	0.654	0.638	0.630	0.580	0.547	0.497	0.523	0.549	---
1. At 100% travel.																

HPS, CL900 and 1500, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L (1)
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _v	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _v	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _v	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _v	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _v	0.384	0.577	0.941	1.39	2.02	2.93	4.40	6.58	8.45	9.61	0.95
					K _v	0.332	0.499	0.814	1.20	1.75	2.53	3.81	5.69	7.31	8.31	---
					X _T	0.532	0.774	0.714	0.587	0.579	0.584	0.588	0.607	0.672	0.773	---
2	6.4	0.25	19	0.75	C _v	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _v	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _v	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _v	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _v	0.450	0.713	1.07	1.52	2.12	3.05	4.57	6.87	9.66	11.9	0.93
					K _v	0.389	0.617	0.926	1.31	1.83	2.64	3.95	5.94	8.36	10.3	---
					X _T	0.740	0.640	0.578	0.589	0.636	0.648	0.612	0.589	0.636	0.718	---
1. At 100% travel.																

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com



HPS, CL2500, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _V	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.384	0.577	0.941	1.39	2.02	2.93	4.40	6.58	8.45	9.61	0.95
					K _V	0.332	0.499	0.814	1.20	1.75	2.53	3.81	5.69	7.31	8.31	---
					X _T	0.532	0.774	0.714	0.587	0.579	0.584	0.588	0.607	0.672	0.773	---
2	6.4	0.25	19	0.75	C _V	0.062	0.095	0.137	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.054	0.082	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.450	0.713	1.07	1.52	2.12	3.05	4.57	6.87	9.66	11.9	0.93
					K _V	0.389	0.617	0.926	1.31	1.83	2.64	3.95	5.94	8.36	10.3	---
					X _T	0.740	0.640	0.578	0.589	0.636	0.648	0.612	0.589	0.636	0.718	---
1. At 100% travel.																

1. At 100% travel.

HPS, CL900 and 1500, Extended Travel Micro-Form, Flow Up															Modified Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _V	0.480	0.940	1.71	2.93	5.49	8.45	10.5	11.5	12.0	12.5	0.95
					K _V	0.415	0.813	1.48	2.53	4.75	7.31	9.08	9.95	10.4	10.8	---
					X _T	0.741	0.660	0.561	0.535	0.599	0.685	0.655	0.632	0.626	0.594	---
	25.4	1	29	1.125	C _V	0.85	1.73	3.22	5.71	8.81	11.6	13.7	15.5	16.5	17.1	0.85
					K _V	0.735	1.50	2.79	4.94	7.62	10.0	11.9	13.4	14.3	14.8	---
					X _T	0.741	0.660	0.561	0.535	0.600	0.685	0.699	0.632	0.626	0.594	---
2	25.4	1	29	1.125	C _V	0.884	1.67	2.86	4.96	9.08	15.6	20.9	23.0	23.9	24.2	0.92
					K _V	0.765	1.44	2.47	4.29	7.85	13.5	18.1	19.9	20.7	20.9	---
					X _T	0.696	0.700	0.698	0.700	0.696	0.700	0.697	0.745	0.714	0.700	---
	31.8	1.25	29	1.125	C _V	1.19	1.90	3.60	8.17	16.9	23.9	29.0	31.0	32.0	33.0	0.91
					K _V	1.03	1.64	3.11	7.07	14.6	20.7	25.1	26.8	27.7	28.5	---
					X _T	0.584	0.603	0.552	0.668	0.731	0.654	0.657	0.670	0.667	0.632	---
	38.1	1.5	38	1.5	C _V	1.98	3.83	7.96	16.0	27.2	37.4	43.3	46.9	51.5	52.2	0.97
					K _V	1.71	3.31	6.89	13.8	23.5	32.4	37.5	40.6	44.5	45.2	---
					X _T	0.584	0.603	0.554	0.668	0.731	0.654	0.682	0.691	0.634	0.632	---
1. At 100% travel.																

1. At 100% travel.



HPS**Micro-Form, CL2500****and Whisper Trim™ III CL900, 1500, and 2500****Catalog 12**

Flow Up through the Port

October 2012 - Page HP-20

HPS, CL2500, Extended Travel Micro-Form, Flow Up															Modified Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _v	0.480	0.940	1.71	2.93	5.49	8.45	10.5	11.5	12.0	12.5	0.95
					K _v	0.415	0.813	1.48	2.53	4.75	7.31	9.08	9.95	10.4	10.8	---
					X _T	0.741	0.660	0.561	0.535	0.599	0.685	0.655	0.632	0.626	0.594	---
	25.4	1	29	1.125	C _v	0.500	1.54	3.61	5.83	7.44	8.86	10.6	12.4	13.1	13.8	0.88
					K _v	0.433	1.33	3.12	5.04	6.44	7.66	9.17	10.7	11.3	11.9	---
					X _T	0.489	0.848	0.556	0.544	0.709	0.820	0.714	0.588	0.644	0.580	---
2	25.4	1	29	1.125	C _v	0.884	1.67	2.86	4.96	9.08	15.6	20.9	23.0	23.9	24.2	0.92
					K _v	0.765	1.44	2.47	4.29	7.85	13.5	18.1	19.9	20.7	20.9	---
					X _T	0.696	0.700	0.698	0.700	0.696	0.700	0.697	0.745	0.714	0.700	---
	31.8	1.25	29	1.125	C _v	1.19	1.90	3.60	8.17	16.9	23.9	29.0	31.0	32.0	33.0	0.91
					K _v	1.03	1.64	3.11	7.07	14.6	20.7	25.1	26.8	27.7	28.5	---
					X _T	0.584	0.603	0.552	0.668	0.731	0.654	0.657	0.670	0.667	0.632	---
	38.1	1.5	38	1.5	C _v	1.87	3.75	8.23	16.5	26.2	33.4	38.0	41.7	43.4	44.2	>0.96
					K _v	1.62	3.24	7.12	14.3	22.7	28.9	32.9	36.1	37.5	38.2	---
					X _T	0.609	0.515	0.520	0.626	0.751	0.790	0.718	0.653	0.668	0.644	---

1. At 100% travel.

HPS, Whisper Trim III--CL900 and 1500																	Linear Characteristic	
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100	
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	1.00	2.50	7.50	12.8	17.7	22.3	26.6	31.2	35.5	39.5	42.6	
						K _v	0.865	2.16	6.49	11.1	15.3	19.3	23.0	27.0	30.7	34.2	36.8	
						X _T	0.718	0.68	0.60	0.60	0.61	0.60	0.61	0.60	0.60	0.60	0.60	
	3	73.0	2.875	50	2	C _v	1.25	6.00	21.0	34.6	49.0	62.7	77.0	89.7	98.8	105	108	
						K _v	1.08	5.19	18.2	29.9	42.4	54.2	66.6	77.6	85.5	90.8	93.4	
						X _T	0.839	0.87	0.80	0.83	0.81	0.82	0.82	0.81	0.82	0.81	0.82	
HPS, Whisper Trim III--CL2500																	Linear Characteristic	
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	---	3.1	8.4	13.1	17.3	21.4	25.1	28.3	30.8	32.9	34.9	
						K _v	---	2.68	7.27	11.3	15.0	18.5	21.7	24.5	26.6	28.5	30.2	
						X _T	0.718	0.68	0.60	0.61	0.60	0.61	0.60	0.60	0.60	0.60	0.60	
HPS, Whisper Trim III--CL900 and 1500																	Linear Characteristic	
B1 ΔP/P1≤.75	3	73.0	2.875	50	2	C _v	0.900	3.00	9.00	14.0	18.6	23.4	28.6	34.7	40.0	45.0	48.7	
						K _v	0.778	2.59	7.79	12.1	16.1	20.2	24.7	30.0	34.6	38.9	42.1	
						X _T	0.622	0.62	0.62	0.63	0.62	0.62	0.63	0.62	0.63	0.62	0.63	
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																		

1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result.

2. Larger capacities may be available with level A1 cages depending on service conditions.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Whisper Trim are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.fisher.com

© 1992, 2012 Fisher Controls International LLC. All rights reserved



HPS and HPT, CL900, 1500, and 2500, Cavitrol™ III, Flow Down																		Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling C _V ⁽²⁾	Valve Opening—Percent of Total Travel										F _L ⁽³⁾
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
Two Stage	1 ⁽¹⁾	22.2	0.875 ⁽¹⁾	38	1.5	C _V	0.360	0.163	0.836	1.80	2.74	3.64	4.51	5.36	6.18	6.91	7.39	0.98
						K _V	0.311	0.141	0.723	1.56	2.37	3.15	3.90	4.64	5.35	5.98	6.39	---
	2	44.4	1.75	50	2	C _V	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98
						K _V	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---
Three Stage	2 ⁽¹⁾	25.4	1 ⁽¹⁾	50	2	C _V	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99
						K _V	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---
HPS and HPT, CL900 and 1500, Cavitrol III, Flow Down																		Linear Characteristic
Two Stage	3	63.5	2.5	64	2.5	C _V	0.720	1.46	4.98	9.24	13.2	17.0	20.7	24.7	28.5	31.9	34.4	0.98
						K _V	0.623	1.26	4.31	7.99	11.4	14.7	17.9	21.4	24.7	27.6	29.8	---
	4	87.3	3.4375	76	3	C _V	0.900	2.61	9.01	15.6	21.8	28.3	34.8	40.4	46.4	52.2	58.1	0.98
						K _V	0.778	2.26	7.79	13.5	18.9	24.5	30.1	34.9	40.1	45.2	50.3	---
	6	133.3	5.25	102	4	C _V	1.72	7.50	20.7	33.8	47.0	60.1	73.3	87.0	100	112	123	0.98
						K _V	1.49	6.49	17.9	29.2	40.7	52.0	63.4	75.3	86.5	96.9	106	---
Three Stage	3	47.6	1.875	64	2.5	C _V	1.20	0.747	2.02	3.92	6.15	8.01	9.50	11.0	12.8	14.9	16.5	0.99
						K _V	1.04	0.646	1.75	3.39	5.32	6.93	8.22	9.52	11.1	12.9	14.3	---
	4	73.0	2.875	76	3	C _V	1.70	2.80	5.50	8.30	11.0	13.9	16.7	19.4	22.2	25.0	27.8	0.99
						K _V	1.47	2.42	4.76	7.18	9.52	12.0	14.4	16.8	19.2	21.6	24.0	---
	6	115.9	4.5625	102	4	C _V	3.10	6.10	13.2	19.8	26.1	34.1	41.5	48.2	54.5	60.9	65.0	0.99
						K _V	2.68	5.28	11.4	17.1	22.6	29.5	35.9	41.7	47.1	52.7	56.2	---
1. Cavitrol III trim in the NPS 1, two stage and the NPS 2, three stage are unbalanced valve plugs. These sizes and constructions are HPS valves; all others in this table are HPT valves. 2. Valves should not be required to throttle at a C _V less than the specified minimum C _V for an extended period. Erosion damage to the valve seats may result. 3. At 100% travel.																		

HPT, CL900 and 1500, Cavitrol III, Protected Inside Seat Design, Flow Down																	Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coef- ficient	Mini- mum Throt- tling C _v	Valve Opening - Percent of Total Travel									
		mm	Inch	mm	Inch			10	20	30	40	50	60	70	80	90	100
Two Stage	2(1)	29.4	1.159	50	2	C _v	0.58	0.03	1.7	3.5	5.2	6.8	8.3	9.7	10.9	12	12.9
						K _v	0.502	0.026	1.47	3	4.5	5.9	7.2	8.4	9.4	10.4	11.1
	3	48.5	1.909	64	2.5	C _v	0.72	0.05	4.4	8.3	12.2	15.9	19.4	22.8	26	28.9	31.5
						K _v	0.623	0.04	3.8	7.2	10.5	13.7	16.8	19.7	22.5	25	27.2
	4	72.3	2.847	76	3	C _v	0.9	1.6	7.9	14.1	20.3	26.3	32.3	38	43.7	49.1	54
						K _v	0.778	1.4	6.8	12.2	17.5	22.7	27.9	32.8	37.8	42.4	46.6
6	118.3	4.659	102	4	C _v	1.72	6.1	19.4	32.6	45.7	58.7	71.4	84	96.4	108.4	119.6	
					K _v	1.49	5.3	16.8	28.2	39.5	50.7	61.7	72.6	83.3	93.6	103.3	
Three Stage	3	32.6	1.284	64	2.5	C _v	1.2	0.07	3	4.7	6.1	7.5	8.9	10.2	11.8	13.5	14.8
						K _v	1.04	0.06	2.6	4.1	5.3	6.5	7.7	8.8	10.2	11.7	12.8
	4	58	2.284	76	3	C _v	1.7	2.7	5	8.2	11.9	14	17.8	20.2	22.1	25.6	27.3
						K _v	1.47	2.3	4.3	7.1	10.3	12.1	15.4	17.5	19.1	22.1	23.6
	6	100.9	3.972	102	4	C _v	3.1	4.7	12	19.3	26.6	31.8	37.4	44.5	51.5	58.5	61.9
						K _v	2.68	4.1	10.4	16.7	23	27.5	32.3	38.4	44.5	50.5	53.5
1. Also CL2500																	



HPS

CL900, 1500, and 2500

Cavitrol™ III Micro-Flat
Flow Down through the Port

Catalog 12
October 2012 - Page HP-22

HPS, CL900, CL1500, CL2500, Cavitrol III 2-Stage Micro-Flat, Flow Down																	Linear Characteristic
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min.	10	20	30	40	50	60	70	80	90	100	
1 ⁽³⁾	22.2	0.875	19	0.75	C _v	0.04	0.02	0.04	0.05	0.07	0.09	0.12	0.16	0.21	0.26	0.30	0.97
					K _v	0.03	0.02	0.03	0.04	0.06	0.08	0.10	0.14	0.18	0.22	0.26	
1 ⁽³⁾	25.4	1	28.5	1.125	C _v	0.04	0.03	0.05	0.08	0.12	0.18	0.26	0.33	0.41	0.51	0.60	0.97
					K _v	0.03	0.03	0.04	0.07	0.10	0.16	0.22	0.29	0.35	0.44	0.52	
1 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.04	0.02	0.02	0.04	0.25	0.49	0.70	0.94	1.36	1.76	2.23	0.97
					K _v	0.03	0.02	0.02	0.03	0.22	0.42	0.61	0.81	1.18	1.52	1.93	
2 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.04	0.02	0.02	0.04	0.25	0.49	0.70	0.94	1.36	1.76	2.23	0.97
					K _v	0.03	0.02	0.02	0.03	0.22	0.42	0.61	0.81	1.18	1.52	1.93	
1. At 100% travel 2. Cavitrol III Micro-Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 3. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 5.065 cm ² / 0.785 ln2, 1/2" stem 4. Flowing port: 19 mm / 0.75 Inch, Unbalanced Area: 5.065 cm ² / 0.785 ln2, 3/4" stem																	

HPS, CL900, CL1500, CL2500, Cavitrol III 3-Stage Micro-Flat, Flow Down																	Linear Characteristic
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min.	10	20	30	40	50	60	70	80	90	100	
2 ⁽³⁾	15.8	0.625	31.7	1.25	C _v	0.05	0.00	0.01	0.03	0.11	0.19	0.28	0.36	0.44	0.53	0.62	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.05	0.01	0.06	0.09	0.16	0.34	0.46	0.62	0.89	1.06	1.18	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2 ⁽⁵⁾	25.4	1	63.5	2.5	C _v	0.06	0.01	0.14	0.37	0.72	1.20	1.86	2.75	3.74	4.53	5.54	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
1. At 100% travel 2. Cavitrol III Micro-Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing. 3. Flowing port: 9.5 mm / 0.375 Inch (Unbalanced Area: 1.96 cm ² / 0.307 In ² , 3/4" stem 4. Flowing port: 12.7 mm / 0.5 Inch (Unbalanced Area: 5.065 cm ² / 0.785 In ² , 3/4" stem 5. Flowing port: 19 mm / 0.75 Inch (Unbalanced Area: 5.065 cm ² / 0.785 In ² , 3/4" stem																	

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Cavitrol are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

CL600 -- Globe and Angle Valves 3-Stage, Level C – Flow Up

Linear
Characteristic

Valve Size, NPS	Port Diameter		Maximum Travel		Level	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inch	mm	Inch			Min	10	20	30	40	50	60	70	80	90	100	
1 Balanced	25.4	1.0	9.5	0.375	C	C _v	0.100	(2)	0.226	0.615	1.28	2.13	3.02	3.80	4.34	4.58	4.58	0.99
2 Balanced	38.1	1.5	9.5	0.375	C	C _v	0.150	(2)	0.545	1.45	2.64	3.85	5.17	6.50	7.75	8.75	9.30	0.99
3 Balanced	55.6	2.19	15.9	0.625	C	C _v	0.250	(2)	1.17	3.12	5.68	8.28	11.1	14.0	16.7	18.8	20.0	0.99
4 Balanced	73.2	2.88	19.1	0.75	C	C _v	0.430	(2)	1.99	5.30	9.65	14.1	18.9	23.8	28.3	32.0	34.0	0.99
6 Balanced	111.1	4.375	19.1	0.75	C	C _v	0.600	(2)	1.17	5.51	12.6	21.6	31.4	40.9	49.1	55.4	59.5	0.99
8 Balanced	136.5	5.375	25.4	1	C	C _v	0.800	(2)	2.07	10.5	23.4	38.5	56.6	75.3	92.6	109	122	0.99

1. At 100% travel.
2. Clearance flow only.

CL900 and CL1500, Globe and Angle Valves 4-Stage, Levels A, B, and C – Flow Up

Linear
Characteristic

Valve Size, NPS	Port Diameter		Maximum Travel		Level	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inch	mm	Inch			Min	10	20	30	40	50	60	70	80	90	100	
1 Unbalanced	17.8	0.7	6.4	0.25	A	C _v	0.040	(2)	0.030	0.150	0.270	0.390	0.520	0.640	0.76	0.88	1.00	0.99
					B		0.040	(2)	0.042	0.210	0.378	0.546	0.728	0.896	1.06	1.23	1.40	0.99
					C		0.040	(2)	0.051	0.255	0.459	0.663	0.884	1.09	1.29	1.50	1.70	0.99
1-1/2 Unbalanced	25.4	1.0	6.4	0.25	A	C _v	0.080	(2)	0.057	0.285	0.513	0.741	0.988	1.22	1.44	1.67	1.90	0.99
					B		0.080	(2)	0.075	0.375	0.675	0.975	1.30	1.60	1.90	2.20	2.50	0.99
					C		0.080	(2)	0.096	0.480	0.864	1.25	1.66	2.05	2.43	2.82	3.20	0.99
2 Balanced	38.1	1.5	9.5	0.375	A	C _v	0.120	(2)	0.400	0.960	1.54	2.20	2.86	3.42	3.92	4.32	4.55	0.99
					B		0.120	(2)	0.460	1.10	1.85	2.63	3.39	4.26	5.19	5.99	6.63	0.99
					C		0.120	(2)	0.570	1.53	2.62	3.85	5.00	6.16	7.29	8.19	8.85	0.99
3 Balanced	55.6	2.19	15.9	0.625	A	C _v	0.200	(2)	0.580	1.84	3.20	4.57	6.23	7.35	8.25	8.82	8.90	0.99
					B		0.200	(2)	0.620	2.00	3.78	5.45	7.30	9.32	11.5	13.4	14.6	0.99
					C		0.200	(2)	0.416	2.19	4.41	6.90	9.80	12.4	14.7	16.4	16.8	0.99
4 Balanced	73.2	2.88	19.1	0.75	A	C _v	0.350	(2)	0.462	2.31	4.16	6.01	8.01	9.86	11.7	13.6	15.4	0.99
					B		0.350	(2)	0.723	3.62	6.51	9.40	12.5	15.4	18.3	21.2	24.1	0.99
					C		0.350	(2)	0.879	4.40	7.91	11.4	15.2	18.8	22.3	25.8	29.3	0.99
6 ⁽³⁾ Balanced	111.1	4.375	25.4	1.0	C	C _v	0.500	(2)	1.8	7.7	16	25	34	42	50	56	61	0.99
8 ⁽³⁾ Balanced	136.5	5.375	31.8	1.25	C	C _v	0.700	(2)	3.5	16	32	50	67	82	96	107	117	0.99

1. At 100% travel.
2. Clearance flow only.
3. NPS 6 and 8 are only available as angle valve bodies with Level C trim.



CL2500, Angle Valve, 6-Stage, Level C – Flow Up																		Linear Characteristic
Valve Size, NPS/ Rating	Port Diameter		Maximum Travel		Level	Flow Coeffi- cient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inch	mm	Inch			Min	10	20	30	40	50	60	70	80	90	100	
1 Unbalanced	17.8	0.7	6.4	0.25	C	C _v	0.035	(2)	0.052	0.26	0.48	0.69	0.85	1.07	1.27	1.37	1.43	0.99
2 Balanced	38.1	1.5	9.5	0.375	C	C _v	0.11	(2)	0.17	0.88	1.55	2.03	2.71	3.79	4.51	5.31	6.09	0.99
3 Balanced	55.6	2.19	15.9	0.625	C	C _v	0.18	(2)	0.37	1.9	3.25	4.5	6.4	8.3	1.014	11.62	13.1	0.99
4 Balanced	73.0	2.88	19.1	0.75	C	C _v	0.3	(2)	0.7	2.8	5.6	8.8	12	15	18	21	23	0.99
6 Balanced	111.1	4.38	25.4	1	C	C _v	0.4	(2)	1.4	5.9	12	19	26	33	40	45	49	0.99
1. At 100% travel. 2. Clearance flow only.																		

The flow coefficients for the Posi-Seal Package (PSP) are identical to the Types 8560 and A41. In fact, the Type A41 is one of its components. The Posi-Seal Package is available in sizes 2–12", ANSI Class 150, and Wafer and Single Flange Style. **Refer to the Type 8560 information.**

Catalog 12

November 2009 - Page RSS-1

Equal Percentage
Flow Up through the Seat Ring

Equal Percentage														Equal Percentage Characteristic		
Valve Size, NPS	Port Diameter ⁽¹⁾		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
	mm	Inches	mm	Inches		5	10	20	30	40	50	60	70	80	90	100
1	8	0.3125	15	0.591	C _v	0.050	0.073	0.117	0.156	0.215	0.390	0.546	0.715	0.934	1.28	1.91
					K _v	0.043	0.063	0.101	0.135	0.186	0.337	0.472	0.618	0.808	1.11	1.65
	15	0.5	15	0.591	C _v	0.139	0.182	0.262	0.427	0.559	0.684	0.842	1.08	1.48	2.23	3.57
					K _v	0.120	0.157	0.227	0.369	0.484	0.592	0.728	0.934	1.28	1.93	3.09
	20	0.75	15	0.591	C _v	0.443	0.585	0.917	1.28	1.77	2.43	3.25	4.52	5.61	7.21	8.41
					K _v	0.383	0.506	0.793	1.11	1.53	2.10	2.81	3.91	4.85	6.24	7.27
	25	1	15	0.591	C _v	0.562	0.632	0.842	1.12	1.55	2.20	2.99	4.03	5.92	8.66	11.5
					K _v	0.486	0.547	0.728	0.969	1.34	1.90	2.59	3.49	5.12	7.49	9.95
1-1/2	25	1	19.1	0.75	C _v	0.599	0.660	0.905	1.24	1.70	2.30	3.06	4.25	6.45	9.66	13.4
					K _v	0.518	0.571	0.783	1.07	1.47	1.99	2.65	3.68	5.58	8.36	11.6
	40	1.5	19.1	0.75	C _v	1.54	1.76	2.24	3.08	4.44	6.54	9.66	13.8	18.4	23.7	28.6
					K _v	1.33	1.52	1.94	2.66	3.84	5.66	8.36	11.9	15.9	20.5	24.7
2	30	1.1875	19.1	0.75	C _v	0.508	0.582	0.763	1.05	1.56	2.32	3.17	4.31	6.03	8.92	13.3
					K _v	0.439	0.503	0.660	0.908	1.35	2.01	2.74	3.73	5.22	7.72	11.5
	50	2	19.1	0.75	C _v	2.14	2.50	3.79	5.58	9.20	12.5	16.2	21.0	28.1	36.6	44.3
					K _v	1.85	2.16	3.28	4.83	7.96	10.8	14.0	18.2	24.3	31.7	38.3
3	50	2	28.6	1.125	C _v	1.37	2.09	3.50	5.19	7.21	9.92	13.8	19.0	26.1	34.7	43.3
					K _v	1.19	1.81	3.03	4.49	6.24	8.58	11.9	16.4	22.6	30.0	37.5
	80	3.1875	28.6	1.125	C _v	3.44	4.93	8.23	12.5	18.0	25.5	35.9	49.6	66.2	81.5	94.1
					K _v	2.98	4.26	7.12	10.8	15.6	22.1	31.1	42.9	57.3	70.5	81.4
4	65	2.5	28.6	1.125	C _v	2.07	3.12	5.17	7.99	11.3	15.5	21.4	29.3	40.9	55.8	69.3
					K _v	1.79	2.70	4.47	6.91	9.77	13.4	18.5	25.3	35.4	48.3	59.9
	96	4	28.6	1.125	C _v	7.12	10.3	16.6	25.1	35.9	51.5	71.7	94.4	116	133	145
					K _v	6.16	8.91	14.4	21.7	31.1	44.5	62.0	81.7	100	115	125
1. Inch equivalents of these metric port diameters have been rounded to common fractional diameters. Actual diameter of the 15 millimeter port is 0.591 inches, of the 40 millimeter port is 1.575 inches, and of the 96 millimeter port is 3.780 inches.																

1. Inch equivalents of these metric port diameters have been rounded to common fractional diameters. Actual diameter of the 15 millimeter port is 0.591 inches, of the 40 millimeter port is 1.575 inches, and of the 96 millimeter port is 3.780 inches.



RSS
CL150 and 300

Equal Percentage Cage
Flow Down through the Seat Ring

Catalog 12
November 2009 - Page RSS-2

This page intentionally left blank

Fisher is a mark owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 1986, 2009; All Rights Reserved



Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
4 x 8 Class 600 to 1500	120	4.70	197	7.75	A1 and A3	C _V	59	131	188	228	253	259	259	259	259	0.65	0.89	
						K _V	51	114	162	197	219	224	224	224	224			224
					A1	F _d	0.063	0.045	0.036	0.031	0.028	0.026	0.024	0.022	0.021			0.020
							A3	0.033	0.023	0.019	0.017	0.015	0.014	0.013	0.012			0.011
					B1 and B3	C _V	36	81	122	156	184	209	228	244	253			259
						K _V	31	70	105	135	159	181	197	211	219			224
					B1	F _d	0.089	0.063	0.051	0.045	0.040	0.036	0.034	0.031	0.030			0.028
							B3	0.043	0.030	0.025	0.022	0.019	0.018	0.016	0.015			0.014
					C1 and C3	C _V	23	56	84	113	138	159	181	197	216			228
						K _V	20	49	73	97	119	138	157	170	187			197
C1	F _d	0.108	0.076	0.062	0.054	0.048	0.044	0.041	0.038	0.036	0.034							
		C3	0.054	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017						
4 x 8 Class 2500	120	4.70	197	7.75	A1 and A3	C _V	59	128	178	206	216	219	219	219	219	0.65	0.89	
						K _V	51	111	154	178	187	189	189	189	189			189
					A1	F _d	0.063	0.045	0.036	0.031	0.028	0.026	0.024	0.022	0.021			0.020
							A3	0.033	0.023	0.019	0.017	0.015	0.014	0.013	0.012			0.011
					B1 and B3	C _V	36	78	119	150	175	194	206	216	219			209
						K _V	31	68	103	130	151	168	178	187	189			181
					B1	F _d	0.089	0.063	0.051	0.045	0.040	0.036	0.034	0.031	0.030			0.028
							B3	0.043	0.030	0.025	0.022	0.019	0.018	0.016	0.015			0.014
					C1 and C3	C _V	23	56	84	109	134	153	172	184	197			206
						K _V	20	49	73	95	116	132	149	159	170			178
C1	F _d	0.108	0.076	0.062	0.054	0.048	0.044	0.041	0.038	0.036	0.034							
		C3	0.054	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017						
6 x 8 Class 600 to 1500 and 8 x 8 through 12 x 8 Class 600 to 2500	120	4.70	197	7.75	A1 and A3	C _V	60	141	222	291	356	413	463	506	544	578	0.65	0.89
						K _V	52	122	192	251	308	357	400	438	470	500		
					A1	F _d	0.063	0.045	0.036	0.031	0.028	0.026	0.024	0.022	0.021	0.020		
							A3	0.033	0.023	0.019	0.017	0.015	0.014	0.013	0.012	0.011		
					B1 and B3	C _V	37	81	128	172	219	259	294	331	366	397		
						K _V	32	70	111	149	189	224	254	287	316	343		
					B1	F _d	0.089	0.063	0.051	0.045	0.040	0.036	0.034	0.031	0.030	0.028		
							B3	0.043	0.030	0.025	0.022	0.019	0.018	0.016	0.015	0.014		
					C1 and C3	C _V	23	56	84	119	147	178	213	238	266	291		
						K _V	20	49	73	103	127	154	184	205	230	251		
C1	F _d	0.108	0.076	0.062	0.054	0.048	0.044	0.041	0.038	0.036	0.034							
		C3	0.054	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017						
6 x 8 Class 2500	120	4.70	197	7.75	A1 and A3	C _V	60	141	216	278	334	381	419	450	472	484	0.65	0.89
						K _V	52	122	187	241	289	330	362	389	408	419		
					A1	F _d	0.063	0.045	0.036	0.031	0.028	0.026	0.024	0.022	0.021	0.020		
							A3	0.033	0.023	0.019	0.017	0.015	0.014	0.013	0.012	0.011		
					B1 and B3	C _V	37	81	128	172	209	250	281	313	341	369		
						K _V	32	70	111	149	181	216	243	270	295	319		
					B1	F _d	0.089	0.063	0.051	0.045	0.040	0.036	0.034	0.031	0.030	0.028		
							B3	0.043	0.030	0.025	0.022	0.019	0.018	0.016	0.015	0.014		
					C1 and C3	C _V	23	56	84	119	147	178	206	231	256	278		
						K _V	20	49	73	103	127	154	178	200	222	241		
C1	F _d	0.108	0.076	0.062	0.054	0.048	0.044	0.041	0.038	0.036	0.034							
		C3	0.054	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017						
1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information. 2. Values given are Inlet versus Outlet, i.e. 6x8 is a 6-inch inlet and an 8-inch outlet. 3. At 100% travel.																		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 6x8 is a 6-inch inlet and an 8-inch outlet.
3. At 100% travel.



Design TBX

Class 600, 900, 1500, & 2500

Linear Cage
Flow Up through the Port

Catalog 12
February 2004 - Page TBX-2

Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
6 x 12 Class 600 to 1500	159	6.25	264	10.38	A1 and A3	C _v	112	253	369	469	553	622	672	703	722	722	0.65	0.89
						K _v	97	219	319	405	478	538	581	608	624	624		
					A1	F _d	0.048	0.034	0.027	0.024	0.021	0.019	0.018	0.017	0.016	0.015		
							A3	0.025	0.018	0.015	0.013	0.011	0.010	0.010	0.009	0.008		
					B1 and B3	C _v	67	147	231	306	372	434	488	538	581	619		
						K _v	58	127	200	265	322	376	422	465	503	535		
					B1	F _d	0.064	0.045	0.037	0.032	0.029	0.026	0.024	0.023	0.021	0.020		
							B3	0.033	0.023	0.019	0.016	0.015	0.013	0.012	0.012	0.011		
					C1 and C3	C _v	43	97	147	200	250	297	338	381	419	456		
						K _v	37	84	127	173	216	257	292	330	362	395		
					C1	F _d	0.080	0.056	0.046	0.040	0.036	0.033	0.030	0.028	0.027	0.025		
							C3	0.041	0.029	0.024	0.021	0.019	0.017	0.016	0.015	0.014		
6 x 12 Class 2500	159	6.25	264	10.38	A1 and A3	C _v	112	241	338	413	463	488	488	488	488	0.65	0.89	
						K _v	97	208	292	357	400	422	422	422	422			422
					A1	F _d	0.048	0.034	0.027	0.024	0.021	0.019	0.018	0.017	0.016			0.015
							A3	0.025	0.018	0.015	0.013	0.011	0.010	0.010	0.009			0.008
					B1 and B3	C _v	67	147	222	288	341	388	425	453	475			488
						K _v	58	127	192	249	295	335	368	392	411			422
					B1	F _d	0.064	0.045	0.037	0.032	0.029	0.026	0.024	0.023	0.021			0.020
							B3	0.033	0.023	0.019	0.016	0.015	0.013	0.012	0.012			0.011
					C1 and C3	C _v	43	97	147	197	238	278	313	347	375			403
						K _v	37	84	127	170	205	241	270	300	324			349
					C1	F _d	0.080	0.056	0.046	0.040	0.036	0.033	0.030	0.028	0.027			0.025
							C3	0.041	0.029	0.024	0.021	0.019	0.017	0.016	0.015			0.014
8 x 12 Class 600 to 1500 and 10 x 12 through 14 x 12 Class 600 to 2500	159	6.25	264	10.38	A1 and A3	C _v	113	253	394	513	622	722	809	888	953	1009	0.65	0.89
						K _v	97	219	341	443	538	624	700	768	824	873		
					A1	F _d	0.048	0.034	0.027	0.024	0.021	0.019	0.018	0.017	0.016	0.015		
							A3	0.025	0.018	0.015	0.013	0.011	0.010	0.010	0.009	0.008		
					B1 and B3	C _v	68	147	231	316	394	469	538	600	659	719		
						K _v	58	127	200	273	341	405	465	519	570	622		
					B1	F _d	0.064	0.045	0.037	0.032	0.029	0.026	0.024	0.023	0.021	0.020		
							B3	0.033	0.023	0.019	0.016	0.015	0.013	0.012	0.012	0.011		
					C1 and C3	C _v	43	97	147	200	250	303	353	406	450	497		
						K _v	37	84	127	173	216	262	305	351	389	430		
					C1	F _d	0.080	0.056	0.046	0.040	0.036	0.033	0.030	0.028	0.027	0.025		
							C3	0.041	0.029	0.024	0.021	0.019	0.017	0.016	0.015	0.014		
8 x 12 Class 2500	159	6.25	264	10.38	A1 and A3	C _v	112	253	381	494	594	681	750	809	856	888	0.65	0.89
						K _v	97	219	330	427	514	589	649	700	741	768		
					A1	F _d	0.048	0.034	0.027	0.024	0.021	0.019	0.018	0.017	0.016	0.015		
							A3	0.025	0.018	0.015	0.013	0.011	0.010	0.010	0.009	0.008		
					B1 and B3	C _v	67	147	231	316	384	453	516	572	628	675		
						K _v	58	127	200	273	332	392	446	495	543	584		
					B1	F _d	0.064	0.045	0.037	0.032	0.029	0.026	0.024	0.023	0.021	0.020		
							B3	0.033	0.023	0.019	0.016	0.015	0.013	0.012	0.012	0.011		
					C1 and C3	C _v	43	97	147	200	250	303	350	394	438	478		
						K _v	37	84	127	173	216	262	303	341	378	414		
					C1	F _d	0.080	0.056	0.046	0.040	0.036	0.033	0.030	0.028	0.027	0.025		
							C3	0.041	0.029	0.024	0.021	0.019	0.017	0.016	0.015	0.014		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.

2. Values given are Inlet versus Outlet, i.e. 6x12 is a 6-inch inlet and a 12-inch outlet.

3. At 100% travel.

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 6x12 is a 6-inch inlet and a 12-inch outlet.
3. At 100% travel.

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2004; All Rights Reserved Printed in USA



Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
8 x 16 Class 600 to 1500	194	7.62	321	12.62	A1 and A3	C _V	170	372	556	716	853	972	1069	1147	1206	1244	0.65	0.89
						K _V	147	322	481	619	738	841	924	992	1043	1076		
					A1	F _d	0.039	0.027	0.022	0.019	0.017	0.016	0.015	0.014	0.013	0.012		
							A3	0.021	0.015	0.012	0.011	0.009	0.009	0.008	0.007	0.007		
					B1 and B3	C _V	102	225	347	466	569	666	753	834	909	978		
						K _V	88	195	300	403	492	576	651	722	787	846		
					B1	F _d	0.053	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017		
							B3	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010	0.009		
					C1 and C3	C _V	64	141	216	294	369	444	509	575	634	691		
						K _V	56	122	187	254	319	384	441	497	549	597		
C1	F _d	0.069	0.049	0.040	0.034	0.031	0.028	0.026	0.024	0.023	0.022							
		C3	0.034	0.024	0.020	0.017	0.015	0.014	0.013	0.012	0.011	0.011						
8 x 16 Class 2500	194	7.62	321	12.62	A1 and A3	C _V	170	366	525	656	763	841	891	913	913	0.65	0.89	
						K _V	147	316	454	568	660	727	770	789	789			789
					A1	F _d	0.039	0.027	0.022	0.019	0.017	0.016	0.015	0.014	0.013			0.012
							A3	0.021	0.015	0.012	0.011	0.009	0.009	0.008	0.007			0.007
					B1 and B3	C _V	102	225	341	444	534	616	688	750	803			844
						K _V	88	195	295	384	462	533	595	649	695			730
					B1	F _d	0.053	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018			0.017
							B3	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010			0.009
					C1 and C3	C _V	64	141	216	294	363	425	484	541	591			641
						K _V	56	122	187	254	314	368	419	468	511			554
C1	F _d	0.069	0.049	0.040	0.034	0.031	0.028	0.026	0.024	0.023	0.022							
		C3	0.034	0.024	0.020	0.017	0.015	0.014	0.013	0.012	0.011	0.011						
10 x 16 Class 600 to 1500 and 12 x 16 through 16 x 16 Class 600 to 2500	194	7.62	321	12.62	A1 and A3	C _V	170	372	575	750	909	1053	1184	1297	1397	1481	0.65	0.89
						K _V	147	322	497	649	787	911	1024	1122	1208	1281		
					A1	F _d	0.039	0.027	0.022	0.019	0.017	0.016	0.015	0.014	0.013	0.012		
							A3	0.021	0.015	0.012	0.011	0.009	0.009	0.008	0.007	0.007		
					B1 and B3	C _V	103	225	347	469	588	694	794	891	978	1063		
						K _V	89	195	300	405	508	600	687	770	846	919		
					B1	F _d	0.053	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017		
							B3	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010	0.009		
					C1 and C3	C _V	65	141	216	294	369	444	522	594	663	725		
						K _V	56	122	187	254	319	384	451	514	573	627		
C1	F _d	0.069	0.049	0.040	0.034	0.031	0.028	0.026	0.024	0.023	0.022							
		C3	0.034	0.024	0.020	0.017	0.015	0.014	0.013	0.012	0.011	0.011						
10 x 16 Class 2500	194	7.62	321	12.62	A1 and A3	C _V	170	372	569	734	884	1016	1131	1231	1313	1375	0.65	0.89
						K _V	147	322	492	635	765	879	979	1065	1135	1189		
					A1	F _d	0.039	0.027	0.022	0.019	0.017	0.016	0.015	0.014	0.013	0.012		
							A3	0.021	0.015	0.012	0.011	0.009	0.009	0.008	0.007	0.007		
					B1 and B3	C _V	102	225	347	469	578	681	775	866	947	1025		
						K _V	88	195	300	405	500	589	670	749	819	887		
					B1	F _d	0.053	0.038	0.031	0.027	0.024	0.022	0.020	0.019	0.018	0.017		
							B3	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010	0.009		
					C1 and C3	C _V	64	141	216	294	369	444	519	584	650	709		
						K _V	56	122	187	254	319	384	449	505	562	614		
C1	F _d	0.069	0.049	0.040	0.034	0.031	0.028	0.026	0.024	0.023	0.022							
		C3	0.034	0.024	0.020	0.017	0.015	0.014	0.013	0.012	0.011	0.011						
1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information. 2. Values given are Inlet versus Outlet, i.e. 8x16 is an 8-inch inlet and a 16-inch outlet. 3. At 100% travel.																		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 8x16 is an 8-inch inlet and a 16-inch outlet.
3. At 100% travel.



Design TBX

Class 600, 900, 1500, & 2500

Linear Cage
Flow Up through the Port

Catalog 12
February 2004 - Page TBX-4

Whisper III - Flow Up																	Linear Characteristic	
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
10 x 18 Class 600 to 1500	234	9.20	391	15.38	A1 and A3	C _V	261	563	841	1078	1288	1469	1622	1747	1844	1913	0.65	0.89
						K _V	226	487	727	933	1114	1270	1403	1511	1595	1654		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					B1 and B3	C _V	153	325	497	675	825	966	1100	1222	1334	1441		
						K _V	132	281	430	584	714	835	952	1057	1154	1246		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	769	863		
10 x 18 Class 2500	234	9.20	391	15.38	A1 and A3	C _V	261	556	800	1006	1172	1303	1394	1450	1466	1466	0.65	0.89
						K _V	226	481	692	870	1014	1127	1206	1254	1268	1268		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	650	788	909	1022	1122		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	562	681	787	884	970	1046		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	547	644	734	819		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	863	1119	1353	1566	1753	1919	2063	2181	0.65	0.89
						K _V	226	487	746	968	1170	1354	1516	1660	1784	1887		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	847	997	1144	1278		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	733	862	989	1106	1216		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	102	213	325	441	553	666	781	888		
12 x 18 Class 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	719	843	962	1073	1173		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	772	869		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	863	1119	1353	1566	1753	1919	2063	2181	0.65	0.89
						K _V	226	487	746	968	1170	1354	1516	1660	1784	1887		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	847	997	1144	1278		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	733	862	989	1106	1216		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	102	213	325	441	553	666	781	888		
12 x 18 Class 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	719	843	962	1073	1173		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	772	869		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	719	843	962	1073	1173		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	772	869		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	719	843	962	1073	1173		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	772	869		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031	0.026	0.022	0.020	0.018	0.017	0.016	0.015	0.014		
							K _V	132	281	430	584	719	843	962	1073	1173		
					B3	F _d	0.023	0.016	0.013	0.011	0.010	0.009	0.009	0.008	0.008	0.007		
							C1 and C3	C _V	101	213	325	441	550	666	772	869		
12 x 18 Class 600 to 1500 and 14 x 18 through 18 x 18 Class 600 to 2500	234	9.20	391	15.38	A1 and A3	C _V	261	563	847	1091	1306	1497	1663	1797	1909	1994	0.65	0.89
						K _V	226	487	733	943	1130	1295	1438	1554	1652	1725		
					A1	F _d	0.032	0.023	0.019	0.016	0.014	0.013	0.012	0.011	0.011	0.010		
							0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
					A3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005		
							B1 and B3	C _V	153	325	497	675	831	975	1113	1241		
					B1	F _d	0.044	0.031										

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 10x18 is a 10-inch inlet and an 18-inch outlet.
3. At 100% travel.

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2004; All Rights Reserved Printed in USA



Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
12 x 20 Class 600 to 1500	285	11.20	473	18.62	A1 and A3	C _v	383	813	1213	1553	1859	2125	2350	2538	2681	2791	0.65	0.89
						K _v	331	703	1049	1343	1608	1838	2033	2195	2319	2414		
					A1	F _d	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010	0.009	0.009		
							A3	0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
					B1 and B3	C _v	232	491	747	1000	1225	1434	1631	1813	1978	2128		
						K _v	201	424	646	865	1060	1241	1411	1568	1711	1841		
					B1	F _d	0.037	0.026	0.021	0.018	0.016	0.015	0.014	0.013	0.012	0.012		
							B3	0.019	0.013	0.011	0.009	0.008	0.008	0.007	0.007	0.006		
					C1 and C3	C _v	149	309	469	634	797	959	1103	1244	1378	1503		
						K _v	129	268	405	549	689	830	954	1076	1192	1300		
					C1	F _d	0.047	0.033	0.027	0.023	0.021	0.019	0.018	0.017	0.016	0.015		
							C3	0.023	0.017	0.013	0.012	0.010	0.010	0.009	0.008	0.008		
14 x 20 through 20 x 20 Class 600 to 1500	285	11.20	473	18.62	A1 and A3	C _v	383	813	1247	1616	1956	2263	2538	2784	2997	3181	0.65	0.89
						K _v	331	703	1079	1398	1692	1957	2195	2408	2592	2752		
					A1	F _d	0.027	0.019	0.016	0.014	0.012	0.011	0.010	0.010	0.009	0.009		
							A3	0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
					B1 and B3	C _v	233	491	747	1003	1259	1484	1697	1900	2091	2269		
						K _v	201	424	646	868	1089	1284	1468	1644	1808	1962		
					B1	F _d	0.037	0.026	0.021	0.018	0.016	0.015	0.014	0.013	0.012	0.012		
							B3	0.019	0.013	0.011	0.009	0.008	0.008	0.007	0.007	0.006		
					C1 and C3	C _v	150	309	469	634	797	959	1119	1278	1422	1556		
						K _v	129	268	405	549	689	830	968	1106	1230	1346		
					C1	F _d	0.047	0.033	0.027	0.023	0.021	0.019	0.018	0.017	0.016	0.015		
							C3	0.023	0.017	0.013	0.012	0.010	0.010	0.009	0.008	0.008		
1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information. 2. Values given are Inlet versus Outlet, i.e. 12x20 is a 12-inch inlet and a 20-inch outlet. 3. At 100% travel.																		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 12x20 is a 12-inch inlet and a 20-inch outlet.
3. At 100% travel.



Design TBX

Class 600, 900, 1500, & 2500

Linear Cage
Flow Up through the Port

Catalog 12
February 2004 - Page TBX-6

Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
16 x 24 Class 600 to 1500	349	13.75	581	22.88	A1 and A3	C _v	648	1291	1888	2403	2859	3263	3613	3900	4134	4300	0.65	0.89
						K _v	561	1116	1633	2079	2473	2822	3125	3374	3576	3720		
					A1	F _d	0.022	0.016	0.013	0.011	0.010	0.009	0.008	0.008	0.007	0.007		
							0.012	0.008	0.007	0.006	0.005	0.005	0.004	0.004	0.004	0.004		
					B1 and B3	C _v	386	772	1156	1538	1872	2188	2484	2756	3009	3225		
						K _v	334	668	1000	1330	1619	1892	2149	2384	2603	2790		
					B1	F _d	0.030	0.022	0.018	0.015	0.014	0.012	0.011	0.010	0.010			
							0.015	0.011	0.009	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
					B3	F _d	0.030	0.022	0.018	0.015	0.014	0.012	0.011	0.010	0.010			
							0.015	0.011	0.009	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
					C1 and C3	C _v	251	497	741	984	1231	1478	1703	1913	2113	2291		
						K _v	217	430	641	851	1065	1279	1473	1654	1827	1981		
C1	F _d	0.038	0.027	0.022	0.019	0.017	0.016	0.014	0.013	0.013	0.012							
		0.019	0.013	0.011	0.010	0.009	0.008	0.007	0.007	0.006	0.006							
18 x 24 through 24 x 24 Class 600 to 1500	349	13.75	581	22.88	A1 and A3	C _v	648	1291	1931	2481	2981	3438	3850	4213	4531	4781	0.65	0.89
						K _v	561	1116	1671	2146	2579	2973	3330	3644	3920	4136		
					A1	F _d	0.022	0.016	0.013	0.011	0.010	0.009	0.008	0.008	0.007	0.007		
							0.012	0.008	0.007	0.006	0.005	0.005	0.004	0.004	0.004	0.004		
					A3	F _d	0.012	0.008	0.007	0.006	0.005	0.005	0.004	0.004	0.004	0.004		
							0.012	0.008	0.007	0.006	0.005	0.005	0.004	0.004	0.004	0.004		
					B1 and B3	C _v	386	772	1156	1538	1916	2250	2569	2869	3150	3394		
						K _v	334	668	1000	1330	1657	1946	2222	2481	2725	2936		
					B1	F _d	0.030	0.022	0.018	0.015	0.014	0.012	0.012	0.011	0.010	0.010		
							0.015	0.011	0.009	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
					B3	F _d	0.015	0.011	0.009	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
							0.015	0.011	0.009	0.008	0.007	0.006	0.006	0.005	0.005	0.005		
C1 and C3	C _v	252	497	741	984	1231	1478	1722	1956	2169	2359							
	K _v	218	430	641	851	1065	1279	1489	1692	1876	2041							
C1	F _d	0.038	0.027	0.022	0.019	0.017	0.016	0.014	0.013	0.013	0.012							
		0.019	0.013	0.011	0.010	0.009	0.008	0.007	0.007	0.006	0.006							
C3	F _d	0.019	0.013	0.011	0.010	0.009	0.008	0.007	0.007	0.006	0.006							
		0.019	0.013	0.011	0.010	0.009	0.008	0.007	0.007	0.006	0.006							
<div>1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.</div> <div>2. Values given are Inlet versus Outlet, i.e. 16x24 is a 16-inch inlet and a 24-inch outlet.</div> <div>3. At 100% travel.</div>																		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 16x24 is a 16-inch inlet and a 24-inch outlet.
3. At 100% travel.

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2004; All Rights Reserved Printed in USA



Whisper III - Flow Up																	Linear Characteristic	
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
18 x 30 Class 600 to 900	424	16.70	606	23.88	A1 and A3	C _v	768	1525	2253	2878	3447	3953	4400	4788	5116	5359	0.65	0.89
						K _v	664	1319	1949	2490	2982	3419	3806	4141	4425	4636		
					A1	F _d	0.022	0.015	0.013	0.011	0.010	0.009	0.008	0.008	0.007	0.007		
							0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
					B1 and B3	C _v	486	969	1444	1928	2356	2756	3131	3481	3809	4088		
						K _v	420	838	1249	1668	2038	2384	2709	3011	3295	3536		
					B1	F _d	0.027	0.019	0.015	0.013	0.012	0.011	0.010	0.009	0.009	0.008		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
					B3	F _d	0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
					C1 and C3	C _v	313	616	916	1222	1528	1831	2119	2384	2641	2866		
						K _v	271	533	792	1057	1322	1584	1833	2062	2284	2479		
C1	F _d	0.033	0.024	0.019	0.017	0.015	0.014	0.013	0.012	0.011	0.011							
		0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
20 x 30 Class 600 to 900	424	16.70	606	23.88	A1 and A3	C _v	768	1525	2284	2966	3581	4147	4666	5134	5556	5891	0.65	0.89
						K _v	664	1319	1976	2565	3098	3587	4036	4441	4806	5095		
					A1	F _d	0.022	0.015	0.013	0.011	0.010	0.009	0.008	0.008	0.007	0.007		
							0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
					A3	F _d	0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
							0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
					B1 and B3	C _v	487	969	1444	1928	2403	2838	3238	3619	3984	4300		
						K _v	421	838	1249	1668	2079	2454	2800	3130	3446	3720		
					B1	F _d	0.027	0.019	0.015	0.013	0.012	0.011	0.010	0.009	0.009	0.008		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
					B3	F _d	0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
C1 and C3	C _v	313	616	916	1222	1528	1831	2131	2438	2713	2953							
	K _v	271	533	792	1057	1322	1584	1844	2108	2346	2554							
C1	F _d	0.033	0.024	0.019	0.017	0.015	0.014	0.013	0.012	0.011	0.011							
		0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
C3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
		0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
22 x 30 through 24 x 30 Class 600 to 900	424	16.70	606	23.88	A1 and A3	C _v	768	1525	2284	3009	3650	4247	4797	5306	5775	6153	0.65	0.89
						K _v	665	1319	1976	2603	3157	3674	4149	4590	4995	5322		
					A1	F _d	0.022	0.015	0.013	0.011	0.010	0.009	0.008	0.008	0.007	0.007		
							0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
					A3	F _d	0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
							0.011	0.008	0.006	0.005	0.005	0.004	0.004	0.004	0.004	0.003		
					B1 and B3	C _v	487	969	1444	1928	2403	2875	3291	3691	4075	4406		
						K _v	421	838	1249	1668	2079	2487	2846	3192	3525	3811		
					B1	F _d	0.027	0.019	0.015	0.013	0.012	0.011	0.010	0.009	0.009	0.008		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
					B3	F _d	0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
							0.014	0.010	0.008	0.007	0.006	0.006	0.005	0.005	0.005	0.004		
C1 and C3	C _v	314	619	919	1222	1528	1831	2131	2438	2744	2997							
	K _v	271	535	795	1057	1322	1584	1844	2108	2373	2592							
C1	F _d	0.033	0.024	0.019	0.017	0.015	0.014	0.013	0.012	0.011	0.011							
		0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
C3	F _d	0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
		0.017	0.012	0.010	0.009	0.008	0.007	0.006	0.006	0.006	0.005							
1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information. 2. Values given are Inlet versus Outlet, i.e. 18x30 is an 18-inch inlet and a 30-inch outlet. 3. At 100% travel.																		

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 18x30 is an 18-inch inlet and a 30-inch outlet.
3. At 100% travel.



Design TBX

Class 600, 900, 1500, & 2500

Linear Cage
Flow Up through the Port

Catalog 12
February 2004 - Page TBX-8

Whisper III - Flow Up																Linear Characteristic		
Valve Size, ⁽²⁾ and Inlet Class	Port Diameter		Maximum Travel		Whisper III Levels	Flow Coefficient	Valve Opening—Percent of Total Travel										X _T ⁽³⁾	F _L ⁽³⁾
	mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
22 x 36 Class 600 to 900	506	19.94	606	23.88	A1 and A3	C _v	964	1922	2884	3725	4494	5194	5831	6400	6903	7131	0.65	0.89
						K _v	834	1662	2495	3222	3887	4493	5044	5536	5971	6169		
					A1	F _d	0.018	0.013	0.010	0.009	0.008	0.007	0.007	0.006	0.006	0.006		
							0.010	0.007	0.006	0.005	0.004	0.004	0.004	0.003	0.003	0.003		
					B1 and B3	C _v	577	1150	1716	2291	2853	3372	3850	4306	4744	5119		
						K _v	499	995	1484	1981	2468	2917	3330	3725	4103	4428		
					B1	F _d	0.025	0.017	0.014	0.012	0.011	0.010	0.009	0.009	0.008	0.008		
							0.012	0.009	0.007	0.006	0.006	0.005	0.005	0.004	0.004	0.004		
					C1 and C3	C _v	371	731	1084	1447	1809	2169	2525	2884	3216	3503		
						K _v	321	633	938	1252	1565	1876	2184	2495	2782	3030		
					C1	F _d	0.031	0.022	0.018	0.016	0.014	0.013	0.012	0.011	0.010	0.010		
							0.016	0.011	0.009	0.008	0.007	0.006	0.006	0.006	0.005	0.005		
24 x 36 Class 600 to 900	506	19.94	606	23.88	A1 and A3	C _v	965	1925	2884	3847	4700	5491	6234	6928	7572	7875	0.65	0.89
						K _v	835	1665	2495	3328	4066	4749	5393	5993	6550	6812		
					A1	F _d	0.018	0.013	0.010	0.009	0.008	0.007	0.007	0.006	0.006	0.006		
							0.010	0.007	0.006	0.005	0.004	0.004	0.004	0.003	0.003	0.003		
					B1 and B3	C _v	578	1150	1716	2291	2856	3428	3994	4494	4978	5406		
						K _v	500	995	1484	1981	2471	2965	3455	3887	4306	4676		
					B1	F _d	0.025	0.017	0.014	0.012	0.011	0.010	0.009	0.009	0.008	0.008		
							0.012	0.009	0.007	0.006	0.006	0.005	0.005	0.004	0.004	0.004		
					B3	F _d	0.012	0.009	0.007	0.006	0.006	0.005	0.005	0.004	0.004	0.004		
							0.012	0.009	0.007	0.006	0.006	0.005	0.005	0.004	0.004	0.004		
					C1 and C3	C _v	372	731	1088	1447	1809	2169	2525	2884	3250	3581		
						K _v	321	633	941	1252	1565	1876	2184	2495	2811	3098		
C1	F _d	0.031	0.022	0.018	0.016	0.014	0.013	0.012	0.011	0.010	0.010							
		0.016	0.011	0.009	0.008	0.007	0.006	0.006	0.006	0.005	0.005							

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.

2. Values given are Inlet versus Outlet, i.e. 22x36 is a 22-inch inlet and a 36-inch outlet.

3. At 100% travel.

1. Reduction of standard inlet size may affect capacity. Consult your Fisher sales office for additional information.
2. Values given are Inlet versus Outlet, i.e. 22x36 is a 22-inch inlet and a 36-inch outlet.
3. At 100% travel.

Fisher is a mark owned by Fisher Controls International LLC, a business of Emerson Process Management.
The Emerson logo is a trademark and service mark of Emerson Electric Co.
All other marks are the property of their respective owners.

www.Fisher.com

©Fisher Controls International LLC 2004; All Rights Reserved Printed in USA



Type Vee-Ball® Designs V150, V200 & V300 Forward Flow

Composition Seals, Flat Metal Seals, and Flow Ring Constructions
Sizes 1- through 8-Inch

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Equal Percentage	
		10	20	30	40	50	60	70	80	90
C _V	1 ⁽²⁾	0.010 ⁽¹⁾	.738	2.53	5.00	8.40	12.4	18.3	29.2	34.6
K _V		0.009	.638	2.19	4.33	7.27	10.7	15.8	25.3	29.9
F _L		0.93	0.90	0.90	0.88	0.83	0.84	0.81	0.66	0.69
X _T		0.392	0.469	0.571	0.592	0.529	0.507	0.441	0.292	0.275
C _V	1-1/2 ⁽²⁾	0.014 ⁽¹⁾	2.07	6.15	11.9	19.2	27.8	38.8	59.2	76.0
K _V		0.012	1.79	5.32	10.3	16.6	24.0	33.6	51.2	65.7
F _L		0.87	0.89	0.86	0.87	0.83	0.82	0.82	0.71	0.73
X _T		0.492	0.460	0.548	0.557	0.534	0.516	0.481	0.344	0.328
C _V	2 ⁽²⁾	0.028 ⁽¹⁾	2.64	9.60	19.1	31.4	46.1	67.2	93.6	123
K _V		0.024	2.28	8.30	16.5	27.2	39.9	58.1	81.0	106
F _L		0.94	0.89	0.90	0.85	0.84	0.83	0.78	0.75	0.75
X _T		0.386	0.490	0.585	0.628	0.597	0.559	0.474	0.409	0.366
C _V	3	.746	9.72	27.7	48.9	79.2	120	170	244	321
K _V		.645	8.15	24.0	42.3	68.5	104	147	211	278
F _d		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.91	0.90	0.88	0.86	0.83	0.80	0.77	0.76	0.74
X _T		.664	.624	.628	.701	.608	.501	.446	.366	.302
C _V	4	3.56	21.1	47.2	86.1	130	195	279	421	596
K _V		3.08	18.3	40.8	74.5	112	169	241	364	516
F _d		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.88	0.91	0.90	0.86	0.82	0.80	0.77	0.69	0.62
X _T		.697	.801	.792	.656	.612	.518	.432	.305	.221
C _V	6	5.34	34.6	82.1	145	225	340	462	704	1100
K _V		4.62	29.9	71.0	125	195	294	400	609	952
F _d		0.51	0.62	0.73	0.81	0.86	0.91	0.95	0.97	0.99
F _L		0.93	0.93	0.91	0.89	0.84	0.80	0.78	0.71	0.58
X _T		.574	.828	.770	.697	.628	.518	.480	.331	.200
C _V	8	6.99	50.9	122	225	353	518	714	1030	1820
K _V		6.05	44.0	106	195	305	448	618	891	1574
F _d		0.51	0.62	0.73	0.81	0.86	0.91	0.95	0.97	0.99
F _L		0.89	0.90	0.90	0.88	0.87	0.82	0.78	0.71	0.54
X _T		.526	.731	.735	.640	.597	.537	.487	.360	.176

1. This coefficient was measured at 12 degrees of rotation.
2. 1- through 2-inch sizes are not available with Flat Metal Seals.

Type Vee-Ball Designs V150, V200 & V300

Forward Flow

Composition Seals, Flat Metal Seals, and Flow Ring Constructions
 Sizes 10- through 20-Inch

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Equal Percentage	
		10	20	30	40	50	60	70	80	90
C _V	10	43.5	104	252	480	727	1000	1400	2050	3000
K _V		37.6	90.0	218	415	629	865	1211	1773	2595
F _D		0.51	0.64	0.75	0.82	0.87	0.91	0.95	0.98	0.99
F _L		0.85	0.89	0.88	0.86	0.84	0.80	0.75	0.64	.54
X _T		.219	.874	.735	.563	.501	.473	.394	.286	.189
C _V	12	44.2	166	390	709	1090	1530	2100	2900	3980
K _V		38.2	144	337	613	943	1323	1817	2509	3443
F _D		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.81	0.82	0.83	0.82	0.81	0.78	0.73	0.66	0.63
X _T		.366	.718	.632	.555	.518	.490	.419	.322	.245
C _V	14 ⁽¹⁾	60.0	250	541	872	1230	1670	2290	3410	5610
K _V		51.9	216	468	754	1064	1445	1981	2950	4853
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.999	.907	.605	.526	.563	.593	.526	.345	.198
C _V	16 ⁽¹⁾	70.0	319	692	1150	1630	2380	3290	4680	8270
K _V		60.6	280	599	995	1410	2059	2846	4048	7154
F _D		0.51	0.67	0.76	0.83	0.88	0.92	0.95	0.98	1.00
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.273	.731	.566	.469	.469	.452	.384	.265	.133
C _V	20 ⁽¹⁾	110	459	993	1600	2260	3070	4200	6260	10,300
K _V		95.2	397	859	1384	1955	2656	3633	5415	8910
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.999	.907	.605	.526	.563	.593	.526	.345	.198

1. 14- through 20-inch Design V150 valves are not available with Flat Metal seals.

Type Vee-Ball® Designs V150, V200 & V300 Forward Flow

HD (Heavy Duty) Metal Seals
Sizes 1- through 8-Inch

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Equal Percentage	
		10	20	30	40	50	60	70	80	90
C _V	1	0.0503 ⁽¹⁾	1.01	2.53	4.68	7.60	11.3	16.5	28.0	33.1
K _V		.0435	.87	2.19	4.05	6.57	9.77	14.3	24.2	28.6
F _L		0.95	0.96	0.94	0.91	0.89	0.88	0.84	0.68	0.68
X _T		.829	.713	.687	.650	.600	.553	.473	.263	.243
C _V	1-1/2	0.0180 ⁽¹⁾	1.56	4.20	8.90	15.1	23.2	32.8	50.4	70.8
K _V		.0156	1.35	3.63	7.70	13.1	20.1	28.4	43.6	61.2
F _L		0.91	0.86	0.94	0.86	0.89	0.87	0.85	0.75	0.70
X _T		.591	.622	.683	.540	.549	.561	.531	.347	.265
C _V	2	0.020 ⁽¹⁾	2.00	6.75	14.8	25.8	40.4	59.6	83.9	122
K _V		.017	1.73	5.84	12.8	22.3	34.9	51.6	72.6	106
F _L		0.89	0.90	0.91	0.90	0.88	0.87	0.81	0.78	0.72
X _T		.749	.612	.589	.633	.624	.558	.485	.427	.314
C _V	3	.169	7.77	24.1	43.1	72.7	112	157	254	338
K _V		.146	6.72	20.8	37.3	62.9	96.9	136	220	292
F _d		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.96	0.96	0.91	0.90	0.85	0.82	0.81	0.71	0.73
X _T		.710	.668	.597	.788	.697	.563	.501	.331	.278
C _V	4	.108	9.22	34.2	67.2	107	158	233	351	539
K _V		.093	7.98	29.6	58.1	92.6	137	202	304	466
F _d		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.89	0.89	0.94	0.87	0.88	0.82	0.80	0.75	0.64
X _T		.941	.931	.718	.706	.677	.605	.487	.354	.233
C _V	6	.996	20.8	56.9	115	195	290	407	607	1070
K _V		.862	18.0	49.2	99.5	169	251	352	525	926
F _d		0.51	0.62	0.73	0.81	0.86	0.91	0.95	0.97	0.99
F _L		0.94	0.94	0.95	0.92	0.88	0.84	0.81	0.75	0.58
X _T		.578	.668	.788	.727	.612	.544	.490	.372	.185
C _V	8	1.41	29.6	94.7	197	318	481	705	1110	1750
K _V		1.22	25.6	81.9	170	275	416	610	960	1514
F _d		0.51	0.62	0.73	0.81	0.86	0.91	0.95	0.97	0.99
F _L		0.96	0.87	0.89	0.87	0.81	0.80	0.72	0.63	0.51
X _T		.348	.744	.693	.601	.578	.508	.406	.263	.158

1. This coefficient was measured at 12 degrees of rotation.

Type Vee-Ball Designs V150, V200 & V300

Forward Flow

HD (Heavy Duty) Metal Seals
 Sizes 10- through 20-Inch

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Equal Percentage	
		10	20	30	40	50	60	70	80	90
C _V	10	7.28	74.1	199	381	610	897	1300	1930	2950
K _V		6.30	64.1	172	330	528	776	1125	1669	2552
F _d		0.51	0.64	0.75	0.82	0.87	0.91	0.95	0.98	0.99
F _L		0.97	0.90	0.90	0.89	0.84	0.79	0.74	0.66	0.54
X _T		.107	.735	.664	.551	.522	.494	.413	.286	.174
C _V	12	7.48	112	291	544	884	1300	1810	2570	4010
K _V		6.47	96.9	252	471	765	1125	1566	2223	3469
F _d		0.51	0.65	0.75	0.82	0.87	0.92	0.95	0.98	0.99
F _L		0.97	0.92	0.92	0.91	0.87	0.82	0.77	0.72	0.60
X _T		.080	.664	.710	.624	.548	.508	.459	.360	.228
C _V	14	56.0	232	502	809	1140	1550	2120	3160	5200
K _V		48.4	201	434	700	986	1341	1834	2733	4498
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.999	.907	.605	.526	.563	.593	.526	.345	.198
C _V	16	26.6	237	600	1040	1500	2040	2900	4560	7840
K _V		22.5	177	449	778	1122	1526	2170	3411	5866
F _d		0.51	0.67	0.76	0.83	0.88	0.92	0.95	0.98	1.00
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.965	.999	.593	.462	.487	.533	.462	.278	.135
C _V	20	105	436	942	1520	2140	2910	3990	5940	9770
K _V		78.6	326	705	1137	1601	2177	2985	4444	7310
F _L		0.89	0.96	0.79	0.78	0.79	0.80	0.74	0.54	0.37
X _T		.999	.907	.605	.526	.563	.593	.526	.345	.198

Type Vee-Ball® Designs V150, V200 & V300 1-Inch Micro-Notch™ Ball

Metal & Ceramic Ball

Coefficients	Valve Rotation, Degrees								
	10	20	30	40	50	60	70	80	90
Metal Micro-Notch Ball with Fisher TCM Plus or Heavy Duty (HD) Metal Seal									
C _V	0.014	0.130	0.360	0.660	1.03	1.43	2.00	3.25	5.23
K _V	0.012	0.112	0.311	0.571	0.89	1.24	1.73	2.81	4.52
F _L	0.95	0.90	0.93	0.93	0.91	0.90	0.93	0.93	0.88
X _T	0.551	0.581	0.660	0.628	0.589	0.593	0.620	0.605	0.578
Ceramic Micro-Notch Ball with Heavy Duty (HD) Metal Seal									
C _V	0.018	0.148	0.415	0.786	1.28	1.78	2.34	2.86	3.64
K _V	0.016	0.128	0.359	0.680	1.11	1.54	2.02	2.47	3.15
F _L	0.90	0.93	0.94	0.93	0.89	0.90	0.88	0.89	0.92
X _T	0.581	0.697	0.693	0.601	0.593	0.612	0.533	0.537	0.612

Vee-Ball, Micro-Notch, Fisher, and Fisher-Rosemount are marks owned by Fisher Controls International, Inc. or Fisher-Rosemount Systems, Inc. All other marks are the property of their respective owners.



Type Vee-Ball Designs V150, V200 & V300 Attenuator

Sizes 4- through 20-Inch

Valve Size, Inches	Coefficient	Valve Rotation, Degrees								
		10°	20°	30°	40°	50°	60°	70°	80°	90°
4	C _v	4.9	23.1	49.8	87.2	129	178	245	332	389
	K _v	4.2	20.0	43.1	75.4	112	154	212	287	336
	F _L	---	---	0.91	---	0.79	---	0.73	---	0.71
	X _T	0.70	0.76	0.74	0.64	0.59	0.52	0.42	0.33	0.33
6	C _v	---	36.1	77.4	131	190	266	383	544	657
	K _v	---	31.2	67.0	113	164	230	331	471	568
	F _L	---	0.92	0.88	---	0.86	0.81	0.79	0.72	0.70
	X _T	---	0.38	0.50	0.51	0.51	0.46	0.37	0.29	0.31
8	C _v	7.9	48.4	112	186	268	380	553	802	1060
	K _v	6.8	41.9	96.9	161	232	329	478	694	917
	F _L	0.88	0.80	0.80	0.75	0.79	0.78	0.74	0.64	0.66
	X _T	0.68	0.95	0.79	0.68	0.64	0.58	0.44	0.31	0.30
10	C _v	13.3	84.7	181	294	452	633	894	1190	1620
	K _v	11.5	73.3	157	254	391	548	773	1030	1400
	F _L	0.89	0.87	0.83	0.79	0.77	0.77	0.75	0.69	0.66
	X _T	0.83	0.73	0.75	0.75	0.62	0.54	0.42	0.36	0.31
12	C _v	20.3	132	269	461	687	1010	1350	1920	2830
	K _v	17.6	114	233	399	594	874	1170	1660	2450
	F _L	0.87	0.80	0.83	0.78	0.79	0.71	0.73	0.69	0.63
	X _T	0.91	0.64	0.77	0.74	0.70	0.56	0.50	0.38	0.28
14	C _v	---	229	502	769	1120	1460	2040	2670	3340
	K _v	---	198	434	665	969	1260	1760	2320	2910
	F _L	---	0.88	---	0.75	---	0.76	---	0.65	0.65
	X _T	---	0.78	0.67	0.66	0.56	0.52	0.40	0.33	0.30
16	C _v	---	234	600	989	1472	1923	2792	3865	5064
	K _v	---	202	519	855	1270	1660	2420	3340	4380
	F _L	---	0.88	---	0.75	---	0.76	---	0.66	0.65
	X _T	---	0.86	0.66	0.58	0.49	0.47	0.35	0.26	0.20
20	C _v	---	430	942	1444	2104	2742	3841	5035	6312
	K _v	---	372	815	1250	1820	2370	3320	4360	5460
	F _L	---	0.88	---	0.75	---	0.76	---	0.66	0.65
	X _T	---	0.78	0.67	0.66	0.56	0.52	0.39	0.33	0.30

Catalog 12

September 1999
Page V150-6

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1997, 1999;
All Rights Reserved

V150E - HD (Heavy Duty) Metal Seal										
Valve Size, NPS	Coefficient	Valve Opening—Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
3 x 4	C _V	2.09 ⁽¹⁾	11.9	28	49.6	77	113	159	230	387
	K _V	1.81	10.3	24.2	42.9	66.6	97.7	138	199	335
	F _d	0.61	0.68	0.78	0.87	0.93	0.92	0.9	0.91	0.88
	F _L	0.91	0.93	0.92	0.89	0.85	0.81	0.79	0.75	0.63
	X _T	0.808	0.557	0.557	0.594	0.609	0.583	0.525	0.399	0.212
4 x 6	C _V	2.5 ⁽¹⁾	19.9	47.7	83.1	133	186	254	352	534
	K _V	2.16	17.2	41.3	71.9	115	161	220	304	462
	F _d	0.47	0.59	0.75	0.86	0.93	0.96	0.95	0.93	0.92
	F _L	0.91	0.89	0.87	0.85	0.82	0.8	0.77	0.75	0.64
	X _T	0.603	0.636	0.651	0.624	0.522	0.487	0.438	0.363	0.235
6 x 8	C _V	5.25 ⁽¹⁾	34.3	81	142	219	317	439	602	964
	K _V	4.54	29.7	70.1	123	189	274	380	521	834
	F _d	0.54	0.65	0.77	0.86	0.92	0.96	0.98	0.99	0.99
	F _L	0.92	0.93	0.92	0.88	0.85	0.81	0.77	0.74	0.59
	X _T	0.993	0.981	0.879	0.8	0.686	0.591	0.513	0.409	0.241
8 x 10	C _V	5.28 ⁽¹⁾	35.6	96.5	181	300	440	636	951	1710
	K _V	4.57	30.8	83.5	157	260	381	550	823	1480
	F _d	0.63	0.68	0.76	0.85	0.91	0.95	0.97	0.98	0.99
	F _L	0.94	0.94	0.94	0.91	0.88	0.86	0.81	0.7	0.51
	X _T	0.991	0.743	0.762	0.711	0.608	0.552	0.463	0.335	0.16
10 x 12	C _V	11.9 ⁽¹⁾	87.6	214	388	599	875	1240	1720	2820
	K _V	10.3	75.8	185	336	518	757	1070	1490	2440
	F _d	0.51	0.62	0.75	0.85	0.91	0.95	0.98	0.99	1
	F _L	0.95	0.97	0.94	0.9	0.86	0.8	0.75	0.7	0.55
	X _T	0.778	0.768	0.728	0.646	0.59	0.525	0.437	0.359	0.206

1. When the ball is centered properly, measurable C_v will begin by 3 degree rotation.



V150S

Slurry Vee-Ball™

Modified Equal Percentage
Reverse Flow

Catalog 12
February 2013 - Page V150S-1

Reverse Flow										Modified Equal Percentage Characteristic
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C _V	3	10	20	30	50	70	90	115	140	170
K _V		9	17	26	43	61	78	99	121	147
F _L		0.96	0.91	0.79	0.73	0.70	0.64	0.57	0.54	0.53
C _V	4	15	30	55	85	130	180	240	310	380
K _V		13	26	48	74	112	156	208	268	329
F _L		0.98	0.93	0.84	0.72	0.67	0.65	0.62	0.62	0.61
C _V	6	30	60	110	180	275	380	500	600	705
K _V		26	52	111	156	238	329	433	519	610
F _L		0.70	0.80	0.84	0.80	0.71	0.67	0.63	0.59	0.49
C _V	8	50	75	125	225	350	510	700	900	1150
K _V		43	65	108	195	303	441	606	779	995
F _L		0.77	0.83	0.87	0.80	0.73	0.66	0.61	0.58	0.58
C _V	10	75	150	250	475	725	1000	1350	1750	2200
K _V		65	130	216	411	627	865	1168	1514	1903
F _L		0.84	0.86	0.90	0.79	0.74	0.64	0.58	0.57	0.49
C _V	12	100	225	425	700	1050	1450	1900	2350	2850
K _V		87	195	368	606	908	1254	1644	2033	2465
F _L		0.71	0.81	0.80	0.73	0.69	0.62	0.59	0.55	0.50

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher and Vee-Ball are marks owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 2004, 2013 Fisher Controls International LLC. All rights reserved



The Design V200 has flow coefficients identical to the Design V150. Refer to the V150 information.
Reminder: The V200 is available in sizes 1- through 10-inch only.

Forward or Reverse Flow

Forward or Reverse Flow										Approximately Equal Percentage Characteristic
Coefficients	Valve Size, Inches	Valve Rotation, Degrees								
		10	20	30	40	50	60	70	80	90
C_v	4	---	6.74	19.0	39.9	68.9	114	182	335	499
K_v		---	5.83	16.4	34.5	59.6	98.6	157	290	432
F_d		---	0.49	0.69	0.84	0.92	0.96	0.98	1.00	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		---	0.66	0.77	0.76	0.71	0.59	0.47	0.26	0.17
C_v	6	---	15.7	42.8	76.1	130	203	308	567	855
K_v		---	13.6	37.0	65.8	112	176	266	490	432
F_d		---	0.54	0.69	0.83	0.90	0.94	0.97	.098	0.99
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		---	0.99	0.83	0.90	0.76	0.64	0.54	0.28	0.17
C_v	8	1.48	27.9	91.8	177	308	478	720	1220	2190
K_v		1.28	24.1	79.4	153	266	413	623	1060	1890
F_d		---	0.59	0.75	0.85	0.92	0.96	0.98	0.99	0.99
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.35	0.92	0.81	0.85	0.63	0.58	0.48	0.29	0.14
C_v	10	42.8	85.5	174	306	484	764	1150	1800	3055
K_v		37.0	74.0	151	265	419	661	995	1560	2640
F_d		---	0.62	0.77	0.86	0.92	0.96	0.98	0.99	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.33	0.59	0.75	0.72	0.68	0.57	0.43	0.29	0.15
C_v	12	40.6	122	267	499	812	1230	1870	3060	5800
K_v		35.1	106	231	432	702	1060	1620	2650	5020
F_d		0.44	0.64	0.78	0.87	0.93	0.97	0.98	0.99	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.24	0.88	0.88	0.78	0.60	0.49	0.38	0.23	0.10
C_v	16	68.3	203	447	813	1340	2030	3010	4630	8130
K_v		59.1	176	387	703	1160	1760	2600	4000	7030
F_d		0.43	0.66	0.79	0.87	0.93	0.97	0.98	0.99	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.46	0.71	0.87	0.83	0.66	0.51	0.42	0.27	0.13
C_v	20	132	330	726	1320	2180	3300	4880	7520	13,200
K_v		114	285	628	1140	1890	2850	4220	6500	11,400
F_d		0.45	0.66	0.80	0.88	0.93	0.97	0.99	1.00	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.29	0.71	0.82	0.86	0.67	0.51	0.42	0.27	0.13
C_v	24	183	458	1010	1830	3020	4580	6770	10,400	18,300
K_v		158	396	874	1580	2610	3960	5860	9000	15,800
F_d		0.47	0.67	0.80	0.88	0.93	0.97	0.99	1.00	1.00
F_L		0.90	0.90	0.90	0.90	0.85	0.78	0.68	0.57	0.45
X_T		0.29	0.71	0.82	0.86	0.67	0.51	0.42	0.27	0.13

Characterized ⁽¹⁾ Aerodome										Modified Equal Percentage Characteristic	
Valve Size, NPS	Minimum Throttling C _V ⁽²⁾	Coefficients	Valve Rotation, Degrees								
			10	20	30	40	50	60	70	80	90
8	41.1	C _V	18.7	66.6	160	260	400	570	790	1120	1360
		K _V	16.2	57.6	138	225	346	493	683	970	1180
		F _d	---	0.10	0.060	0.046	0.038	0.032	0.032	0.035	0.039
		F _L	0.90	0.88	0.79	0.74	0.71	0.66	0.69	0.69	0.65
		X _T	0.764	0.549	0.534	0.457	0.395	0.387	0.374	0.308	0.280
10	64.8	C _V	29.4	104	251	407	618	894	1240	1750	2130
		K _V	25.4	90	217	352	535	773	1070	1510	1840
		F _d	---	0.081	0.048	0.037	0.030	0.025	0.025	0.028	0.031
		F _L	0.90	0.88	0.79	0.74	0.71	0.66	0.69	0.69	0.65
		X _T	0.764	0.548	0.534	0.462	0.408	0.387	0.373	0.309	0.280
12	93.3	C _V	42.2	150	360	584	887	1280	1780	2520	3060
		K _V	36.5	130	311	505	767	1110	1540	2180	2650
		F _d	---	0.064	0.040	0.030	0.025	0.021	0.021	0.023	0.026
		F _L	0.90	0.88	0.79	0.74	0.71	0.66	0.69	0.69	0.65
		X _T	0.758	0.548	0.538	0.457	0.411	0.388	0.373	0.308	0.279
16	167	C _V	75.5	268	647	1047	1592	2304	3201	4515	5480
		K _V	65.3	232	559	906	1380	1990	2770	3910	4740
		F _d	---	0.051	0.031	0.023	0.019	0.016	0.016	0.018	0.020
		F _L	0.90	0.88	0.79	0.74	0.71	0.66	0.69	0.69	0.65
		X _T	0.765	0.549	0.535	0.459	0.410	0.385	0.371	0.308	0.280
20	262	C _V	118	421	1010	1640	2490	3610	5020	7070	8590
		K _V	102.4	364	874	1420	2150	3120	4340	6120	7430
		F _d	---	0.041	0.026	0.019	0.016	0.014	0.014	0.015	0.016
		F _L	0.90	0.88	0.79	0.74	0.71	0.66	0.69	0.69	0.65
		X _T	0.766	0.549	0.536	0.459	0.410	0.385	0.368	0.308	0.281
1. Window starts at about 60 degrees. 2. Valves should not be required to throttle at a Cv less than the specified minimum Cv.											



V260A with Aerodome Attenuator

Forward Flow

Catalog 12
August 2012 - Page V260-2

High Density Aerodome											Modified Linear Characteristic
Valve Size, NPS	Minimum Throttling $C_v^{(1)}$	Coefficients	Valve Rotation, Degrees								
			10	20	30	40	50	60	70	80	90
8	41.1	C_v	16.1	62.9	153	256	390	553	737	919	996
		K_v	13.9	54.4	133	221	337	478	638	795	861
		F_d	---	0.10	0.060	0.046	0.038	0.032	0.028	0.026	0.024
		F_L	0.91	0.88	0.79	0.73	0.69	0.66	0.66	0.66	0.66
		X_T	0.752	0.615	0.528	0.463	0.406	0.366	0.332	0.302	0.290
10	64.8	C_v	25.5	100	243	405	618	876	1170	1460	1580
		K_v	22.1	87	210	350	535	758	1010	1260	1370
		F_d	---	0.081	0.048	0.037	0.030	0.025	0.023	0.021	0.019
		F_L	0.94	0.87	0.77	0.72	0.70	0.68	0.66	0.65	0.65
		X_T	0.751	0.612	0.528	0.467	0.408	0.364	0.332	0.300	0.288
12	93.3	C_v	36.9	144	351	586	893	1270	1690	2110	2280
		K_v	31.9	125	304	507	773	1099	1460	1830	1970
		F_d	---	0.064	0.040	0.030	0.025	0.021	0.019	0.017	0.016
		F_L	0.97	0.85	0.75	0.71	0.70	0.69	0.67	0.66	0.66
		X_T	0.617	0.505	0.434	0.383	0.333	0.297	0.273	0.247	0.238
16	167	C_v	65.9	257	627	1050	1590	2260	3020	3760	4070
		K_v	57.0	222	542	908	1380	1950	2610	3250	3520
		F_d	---	0.051	0.031	0.023	0.019	0.016	0.014	0.013	0.012
		F_L	0.94	0.87	0.77	0.72	0.70	0.68	0.66	0.65	0.65
		X_T	0.751	0.614	0.527	0.460	0.408	0.364	0.330	0.301	0.289
20	262	C_v	103	403	983	1640	2500	3540	4730	5890	6380
		K_v	89	349	850	1420	2160	3060	4090	5090	5520
		F_d	---	0.041	0.026	0.019	0.016	0.014	0.012	0.011	0.011
		F_L	0.94	0.87	0.77	0.72	0.70	0.68	0.66	0.65	0.65
		X_T	0.756	0.618	0.528	0.464	0.406	0.365	0.330	0.303	0.292

1. Valves should not be required to throttle at a C_v less than the minimum throttling C_v .

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 1998, 2012 Fisher Controls International LLC. All rights reserved



Catalog 12

August 2012 - Page V260-3

Characterized ⁽¹⁾ Hydrodome								Modified Equal Percentage Characteristic			
Valve Size, NPS	Minimum Throttling C _v ⁽²⁾	Coefficients	Ball Angle of Opening, Degrees								
			10	20	30	40	50	60	70	80	90
8	46.6	C _v	13.6	79.6	160	265	408	585	797	1150	1380
		K _v	11.8	68.9	138	229	353	506	689	995	1190
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
10	72.1	C _v	21.1	123	248	411	632	907	1240	1780	2140
		K _v	18.2	107	215	355	547	784	1070	1540	1850
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
12	105	C _v	30.7	179	361	597	920	1320	1800	2590	3110
		K _v	26.5	155	312	517	796	1140	1550	2240	2690
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
16	189	C _v	55.1	322	648	1070	1650	2370	3230	4660	5590
		K _v	47.6	279	560	928	1430	2050	2790	4030	4830
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
20	292	C _v	85.1	498	1000	1660	2550	3660	4990	7190	8630
		K _v	73.6	431	866	1430	2210	3170	4310	6220	7470
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
1. Window starts at about 60 degrees. 2. Valves should not be required to throttle at a Cv less than the minimum throttling Cv.											

High Density Hydrodome								Modified Equal Percentage Characteristic			
Valve Size, NPS	Minimum Throttling C _V ⁽¹⁾	Coefficients	Ball Angle of Opening, Degrees								
			10	20	30	40	50	60	70	80	90
8	46.6	C _V	13.3	79.9	162	268	415	593	801	1020	1060
		K _V	11.5	69.1	140	232	359	513	693	882	917
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
10	71.8	C _V	20.5	123	250	413	640	914	1230	1570	1630
		K _V	17.7	106	216	357	554	791	1060	1360	1410
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
12	106	C _V	30.2	181	367	608	941	1350	1820	2310	2400
		K _V	26.1	157	317	526	814	1170	1570	2000	2080
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
16	186	C _V	53.0	318	645	1070	1650	2360	3190	4060	4210
		K _V	45.8	275	558	926	1430	2040	2760	3510	3640
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
20	292	C _V	83.2	500	1010	1680	2600	3710	5010	6380	6620
		K _V	72.0	432	877	1450	2250	3210	4330	5520	5730
		F _L	0.84	0.90	0.82	0.77	0.72	0.68	0.66	0.66	0.62
1. Valves should not be required to throttle at a Cv less than the minimum throttling Cv.											



V260C without Attenuator

Forward Flow

Catalog 12
August 2012 - Page V260-4

Gas or Liquid Flow										Modified Equal Percentage Characteristic	
Valve Size, NPS	Minimum Throttling C _V (1)	Coefficients	Valve Rotation, Degrees								
			10	20	30	40	50	60	70	80	90
8	86.7	C _V	47.3	126	236	382	604	972	1600	3000	4960
		K _V	40.9	109	204	330	522	841	1380	2600	4290
		F _L	0.79	0.87	0.91	0.91	0.85	0.81	0.73	0.63	0.63
		F _d	0.37	0.64	0.78	0.88	0.94	0.97	0.98	0.99	1.00
		X _T	0.44	0.64	0.77	0.77	0.67	0.51	0.38	0.20	0.13
10	136	C _V	74.1	197	369	598	946	1520	2510	4700	7770
		K _V	64.1	171	320	517	818	1320	2170	4060	6720
		F _L	0.79	0.87	0.91	0.91	0.85	0.81	0.73	0.63	0.63
		F _d	0.37	0.64	0.78	0.87	0.94	0.97	0.99	0.99	1.00
		X _T	0.44	0.64	0.77	0.77	0.67	0.51	0.38	0.20	0.13
12	196	C _V	107	284	532	861	1360	2190	3610	6760	11 200
		K _V	92.2	246	460	745	1180	1890	3120	5850	9670
		F _L	0.79	0.87	0.91	0.91	0.85	0.81	0.73	0.63	0.63
		F _d	0.39	0.67	0.79	0.87	0.93	0.97	0.99	1.00	1.00
		X _T	0.44	0.64	0.77	0.77	0.67	0.51	0.38	0.20	0.13
16	347	C _V	189	505	945	1530	2420	3890	6410	12 000	19 900
		K _V	164	437	818	1320	2090	3370	5540	10 400	17 200
		F _d	0.38	0.64	0.79	0.87	0.93	0.97	0.99	0.99	1.00
		F _L	0.79	0.87	0.91	0.91	0.85	0.81	0.73	0.63	0.63
		X _T	0.44	0.64	0.77	0.77	0.67	0.51	0.38	0.20	0.13
20	542	C _V	296	788	1480	2390	3780	6080	10 000	18 800	31 000
		K _V	256	681	1280	2070	3270	5260	8660	16 200	26 800
		F _d	0.42	0.66	0.79	0.87	0.93	0.97	0.99	1.00	1.00
		F _L	0.79	0.87	0.91	0.91	0.85	0.81	0.73	0.63	0.63
		X _T	0.44	0.63	0.76	0.76	0.66	0.50	0.38	0.20	0.13
1. Valves should not be required to throttle at a Cv less than the minimum throttling Cv.											

1. Valves should not be required to throttle at a C_v less than the minimum throttling C_v.

Responsibility for selection, use, and maintenance of any product remains solely with the purchaser and end user. The contents of this publication are for informational purposes only and are not to be construed as warranties or guarantees, express or implied, regarding the products or services described therein. Fisher is a mark owned by one of the companies in the Emerson Process Management business unit of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.
www.Fisher.com

© 1998, 2012 Fisher Controls International LLC. All rights reserved



The Design V300 has flow coefficients identical to the Design V150. Refer to the V150 information.

Reminder: The V300 is available in sizes 1- through 16-inch only.

Reminder: The V300 14- and 16-inch sizes are not available with Flat Metal seals.

Design V500 Forward Flow

Level 1, 2 and 3 Trims Full Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	1.22	2.89	5.05	7.63	9.94	11.3	11.8	12.0	12.2
K _V		1.06	2.50	4.37	6.60	8.60	9.77	10.2	10.4	10.6
F _d		0.49	0.64	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.89	0.89	0.88	0.85	0.85	0.85	0.85	0.85	0.85
X _T		0.480	0.497	0.508	0.548	0.597	0.632	0.636	0.612	0.593
C _V	1-1/2	2.07	6.15	11.5	16.6	20.7	23.5	25.3	26.1	26.6
K _V		1.79	5.32	9.95	14.4	17.9	20.3	21.9	22.6	23.0
F _d		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.95	0.85	0.85	0.84	0.84	0.84	0.84	0.84	0.84
X _T		0.770	0.476	0.483	0.555	0.616	0.636	0.632	0.601	0.589
C _V	2	4.11	8.73	16.7	27.0	37.2	43.4	45.8	46.2	46.2
K _V		3.56	7.55	14.4	23.4	32.2	37.5	39.6	40.0	40.0
F _d		0.49	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.97	0.92	0.84	0.79	0.77	0.75	0.75	0.74	0.74
X _T		0.439	0.442	0.442	0.422	0.422	0.462	0.452	0.442	0.442
C _V	3	8.80	22.7	43.3	71.3	96.8	116	130	138	142
K _V		7.61	19.6	37.5	61.7	83.7	100	112	119	123
F _d		0.46	0.62	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.86	0.84	0.83	0.83	0.83	0.82	0.78	0.77	0.77
X _T		0.469	0.544	0.574	0.526	0.497	0.526	0.508	0.476	0.456
C _V	4	16.6	41.3	79.1	123	166	203	230	247	255
K _V		14.3	35.7	68.4	106	144	176	199	214	221
F _d		0.45	0.61	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.85	0.82	0.81	0.81	0.80	0.79	0.77	0.76	0.76
X _T		0.439	0.555	0.501	0.466	0.473	0.490	0.480	0.459	0.442
C _V	6	17.5	79.1	155	270	363	434	492	540	565
K _V		15.1	68.4	134	234	314	375	426	467	489
F _d		0.44	0.60	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.97	0.93	0.88	0.82	0.76	0.73	0.72	0.71	0.71
X _T		0.879	0.585	0.540	0.456	0.439	0.432	0.436	0.426	0.416
C _V	8	51.5	146	298	481	646	775	879	981	1050
K _V		44.5	126	258	416	559	670	760	849	908
F _d		0.43	0.59	0.72	0.80	0.87	0.92	0.96	0.99	1.00
F _L		0.97	0.93	0.87	0.78	0.72	0.71	0.70	0.69	0.67
X _T		0.456	0.605	0.533	0.449	0.413	0.403	0.391	0.372	0.360

Fisher, and Fisher-Rosemount are marks owned by Fisher Controls International, Inc. or Fisher-Rosemount Systems, Inc. All other marks are the property of their respective owners.

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1999;
All Rights Reserved



Catalog 12

August 1999
Page V500-1

Design V500

Reverse Flow

Level 1, 2, and 3 Trims Full Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	1.08	2.82	5.26	9.11	12.4	14.7	15.9	16.4	16.8
K _V		0.93	2.44	4.55	7.88	10.7	12.7	13.8	14.2	14.5
F _d		0.49	0.64	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.80	0.79	0.73	0.63	0.58	0.55	0.56	0.51	0.48
X _T		0.172	0.284	0.406	0.357	0.345	0.322	0.300	0.289	0.283
C _V	1-1/2	1.71	5.33	11.3	18.4	24.7	28.6	30.1	30.7	31.0
K _V		1.48	4.61	9.77	15.9	21.4	24.7	26.0	26.6	26.8
F _d		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.75	0.74	0.70	0.66	0.64	0.63	0.63	0.63	0.63
X _T		0.357	0.442	0.432	0.397	0.369	0.360	0.360	0.357	0.357
C _V	2	2.98	7.40	15.6	27.6	41.9	52.9	56.4	57.2	57.4
K _V		2.58	6.40	13.5	23.9	36.2	45.8	48.8	49.5	49.7
F _d		0.49	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.92	0.89	0.81	0.67	0.60	0.58	0.58	0.58	0.58
X _T		0.480	0.476	0.462	0.384	0.308	0.265	0.265	0.265	0.265
C _V	3	7.19	21.4	47.0	75.4	105	122	132	134	141
K _V		6.22	18.5	40.7	65.2	90.8	106	114	116	122
F _d		0.46	0.62	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.80	0.80	0.77	0.71	0.66	0.65	0.65	0.65	0.65
X _T		0.357	0.476	0.487	0.436	0.372	0.378	0.384	0.376	0.357
C _V	4	12.2	39.0	79.9	124	171	202	222	232	235
K _V		10.6	33.7	69.1	107	148	175	192	201	203
F _d		0.45	0.61	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.90	0.89	0.81	0.73	0.71	0.70	0.69	0.69	0.69
X _T		0.522	0.544	0.487	0.456	0.406	0.406	0.416	0.423	0.416
C _V	6	15.1	72.4	156	251	351	438	534	638	717
K _V		13.1	62.6	135	217	304	379	462	552	620
F _d		0.44	0.60	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.85	0.85	0.82	0.77	0.70	0.66	0.61	0.57	0.51
X _T		0.416	0.597	0.518	0.522	0.452	0.388	0.336	0.270	0.219
C _V	8	33.5	143	302	485	663	798	871	897	986
K _V		29.0	124	261	420	573	690	753	776	853
F _d		0.43	0.59	0.72	0.80	0.87	0.92	0.96	0.99	1.00
F _L		0.81	0.81	0.79	0.76	0.68	0.66	0.66	0.66	0.66
X _T		0.697	0.593	0.483	0.410	0.354	0.342	0.366	0.403	0.363

Catalog 12

Level 1, 2, and 3 Trims Reduced Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	0.777	2.09	3.02	3.62	4.53	4.90	4.93	4.96	5.01
K _V		0.672	1.81	2.61	3.13	3.92	4.24	4.26	4.29	4.33
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.89	0.89	0.88	0.85	0.82	0.79	0.75	0.74	0.74
X _T		0.487	0.391	0.497	0.597	0.508	0.439	0.436	0.429	0.419
C _V	1-1/2	0.632	2.56	4.47	7.15	9.62	10.7	10.8	10.9	10.9
K _V		.547	2.21	3.87	6.18	8.32	9.26	9.34	9.43	9.43
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.84	0.84	0.84	0.82	0.79	0.75	0.73	0.73	0.73
X _T		0.559	0.397	0.522	0.574	0.585	0.508	0.497	0.490	0.490
C _V	2	1.30	3.49	5.31	9.64	15.1	17.3	17.3	17.3	17.3
K _V		1.12	3.02	4.59	8.34	13.1	15.0	15.0	15.0	15.0
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.85	0.85	0.84	0.84	0.82	0.79	0.79	0.79	0.79
X _T		0.391	0.336	0.452	0.563	0.529	0.462	0.462	0.462	0.462
C _V	3	6.78	11.5	16.0	26.7	40.2	47.7	48.4	48.4	48.4
K _V		5.86	9.95	13.8	23.1	34.8	41.3	41.9	41.9	41.9
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.90	0.88	0.87	0.86	0.85	0.82	0.77	0.77	0.77
X _T		0.487	0.501	0.487	0.429	0.459	0.429	0.429	0.429	0.429
C _V	4	10.0	18.2	24.4	43.7	69.2	90.6	98.2	98.2	98.2
K _V		8.65	15.7	21.1	37.8	59.9	78.4	84.9	84.9	84.9
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.95	0.89	0.85	0.84	0.84	0.81	0.77	0.77	0.77
X _T		0.426	0.459	0.570	0.504	0.487	0.462	0.426	0.426	0.426
C _V	6	9.50	26.6	41.8	76.0	129	170	200	200	200
K _V		8.22	23.0	36.2	65.7	112	147	173	173	173
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.97	0.96	0.92	0.86	0.80	0.76	0.74	0.74	0.74
X _T		0.995	0.351	0.403	0.487	0.416	0.462	0.410	0.410	0.410
C _V	8	39.9	87.8	155	241	343	448	541	606	623
K _V		34.5	75.9	134	208	297	388	468	524	539
F _d ⁽²⁾		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.96	0.81	0.80	0.79	0.78	0.76	0.74	0.72	0.70
X _T		0.400	0.446	0.459	0.449	0.429	0.413	0.413	0.413	0.391
1. Measured at 60% Port. 2. Measured at 40% Port.										

Design V500

Reverse Flow

Level 1, 2, and 3 Trims Reduced Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	.634	2.09	3.34	3.96	5.21	5.64	5.70	5.71	5.76
K _V		.548	1.81	2.89	3.43	4.51	4.88	4.93	4.94	4.98
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70
X _T		0.230	0.216	0.207	0.406	0.366	0.348	0.339	0.345	0.342
C _V	1-1/2	.464	1.93	4.21	7.81	11.0	12.1	12.1	12.2	12.2
K _V		.401	1.67	3.64	6.76	9.52	10.5	10.5	10.6	10.6
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.93	0.93	0.75	0.72	0.70	0.70	0.70	0.70	0.70
X _T		0.970	0.416	0.501	0.467	0.416	0.416	0.416	0.413	0.416
C _V	2	.965	2.68	4.82	12.0	17.7	18.7	18.8	18.9	18.9
K _V		.835	2.31	4.17	10.4	15.3	16.2	16.3	16.3	16.3
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.96	0.96	0.77	0.67	0.62	0.62	0.62	0.62	0.62
X _T		0.518	0.508	0.559	0.354	0.351	0.360	0.357	0.354	0.354
C _V	3	5.95	10.6	14.7	29.9	49.0	56.0	56.2	56.2	56.7
K _V		5.15	9.17	12.7	25.9	42.4	48.4	48.6	48.6	49.0
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.80	0.79	0.73	0.64	0.59	0.58	0.58	0.58	0.58
X _T		0.429	0.455	0.487	0.345	0.286	0.286	0.286	0.286	0.281
C _V	4	7.69	15.3	22.7	42.6	75.0	98.0	99.5	100	102
K _V		6.65	13.2	19.6	36.8	64.9	84.8	86.1	86.5	88.2
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.83	0.82	0.81	0.77	0.60	0.59	0.58	0.58	0.58
X _T		0.504	0.548	0.555	0.529	0.375	0.322	0.336	0.334	0.319
C _V	6	5.10	20.6	34.6	71.9	123	170	230	231	232
K _V		4.41	17.8	29.9	62.2	106	147	199	200	201
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.97	0.95	0.90	0.82	0.73	0.65	0.57	0.55	0.55
X _T		0.990	0.551	0.566	0.533	0.432	0.397	0.263	0.260	0.258
C _V	8	27.1	74.3	140	232	342	457	552	614	646
K _V		23.4	64.3	121	201	296	395	477	531	559
F _d ⁽²⁾		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.92	0.91	0.88	0.76	0.69	0.66	0.62	0.60	0.58
X _T		0.636	0.494	0.494	0.490	0.442	0.388	0.369	0.339	0.311
1. Measured at 60% Port. 2. Measured at 40% Port.										

Catalog 12

August 1999
Page V500-4

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1999;
All Rights Reserved

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	.30	1.91	4.68	7.3	9.17	10.3	11.0	11.5	11.6
K _V		.260	1.65	4.05	6.31	7.93	8.91	9.52	9.95	10.0
F _d		0.49	0.64	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		- - -	0.98	0.87	0.87	0.85	0.86	0.85	0.86	0.84
X _T		0.668	0.574	0.529	0.566	0.616	0.668	0.685	0.628	0.616
C _V	1-1/2	1.46	3.79	8.13	13.4	17.9	20.7	22.4	24.0	25.0
K _V		1.26	3.28	7.03	11.6	15.5	17.9	19.4	20.8	21.6
F _d		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.86	0.86	0.82	0.84	0.80	0.80	0.79	0.79	0.79
X _T		0.566	0.605	0.55	0.544	0.551	0.574	0.589	0.585	0.597
C _V	2	1.76	6.0	13.8	22.6	29.5	35.2	38.4	38.4	38.4
K _V		1.52	5.19	11.9	19.5	25.5	30.4	33.2	33.2	33.2
F _d		0.49	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.95	0.96	0.94	0.83	0.81	0.80	0.77	0.77	0.78
X _T		0.819	0.555	0.501	0.480	0.533	0.566	0.570	0.585	0.585
C _V	3	7.6	23.2	44.0	62.6	82.5	102	115	119	124
K _V		6.57	20.1	38.1	54.1	71.4	88.2	99.5	103	107
F _d		0.46	0.62	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.88	0.87	0.85	0.84	0.83	0.82	0.80	0.80	0.80
X _T		0.578	0.494	0.511	0.540	0.529	0.515	0.518	0.533	0.526
C _V	4	9.31	37.0	73.5	111	144	171	192	208	221
K _V		8.05	32.0	63.6	96.0	125	148	166	180	191
F _d		0.45	0.61	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.94	0.90	0.85	0.84	0.82	0.80	0.77	0.77	0.77
X _T		0.526	0.476	0.449	0.452	0.480	0.504	0.511	0.501	0.487
C _V	6	9.71	64.3	141	222	299	368	426	469	499
K _V		8.40	55.6	122	192	259	318	368	406	432
F _d		0.44	0.60	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.95	0.88	0.82	0.80	0.78	0.78	0.77	0.77	0.76
X _T		0.504	0.459	0.432	0.422	0.429	0.436	0.432	0.422	0.413
C _V	8	34.6	142	290	447	592	716	822	911	958
K _V		29.9	123	251	387	512	619	711	788	829
F _d		0.43	0.59	0.72	0.80	0.87	0.92	0.96	0.99	1.00
F _L		0.92	0.76	0.78	0.79	0.77	0.76	0.73	0.71	0.73
X _T		0.544	0.446	0.426	0.429	0.429	0.46	0.419	0.410	0.429

Design V500

Reverse Flow

Level 4 Trim Full Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	.107	1.85	5.09	8.8	11.9	13.6	14.0	14.0	15.3
K _V		.093	1.60	4.40	7.61	10.3	11.8	12.1	12.1	13.2
F _d		0.49	0.64	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		- - -	0.88	0.65	0.60	0.54	0.54	0.60	0.62	0.61
X _T		0.334	0.526	0.426	0.360	0.334	0.345	0.372	0.384	0.334
C _V	1-1/2	.988	3.37	7.66	13.5	19.3	23.5	25.3	25.3	26.1
K _V		.854	2.92	6.63	11.7	16.7	20.3	21.9	21.9	22.6
F _d		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.98	0.92	0.75	0.73	0.62	0.58	0.59	0.61	0.61
X _T		0.473	0.585	0.563	0.487	0.432	0.403	0.400	0.426	0.429
C _V	2	1.42	4.92	11.8	20.9	29.8	36.7	40.9	42.7	43.0
K _V		1.23	4.26	10.2	18.1	25.8	31.7	35.4	36.9	37.2
F _d		0.49	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.97	0.93	0.86	0.77	0.72	0.62	0.64	0.63	0.66
X _T		0.403	0.718	0.616	0.518	0.473	0.452	0.452	0.446	0.439
C _V	3	7.64	20.6	41.3	62.4	80.5	94.8	105	109	111
K _V		6.61	17.8	34.9	54.0	69.6	82.0	90.8	94.3	96.0
F _d		0.46	0.62	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.93	0.91	0.89	0.81	0.73	0.72	0.71	0.74	0.76
X _T		0.616	0.656	0.537	0.497	0.501	0.508	0.504	0.515	0.511
C _V	4	8.07	31.3	67.1	102	129	153	174	189	192
K _V		6.98	27.1	58.0	88.2	112	132	151	163	166
F _d		0.45	0.61	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.86	0.85	0.84	0.80	0.75	0.75	0.75	0.75	0.74
X _T		0.456	0.664	0.533	0.490	0.515	0.526	0.522	0.504	0.515
C _V	6	10.5	58.6	134	218	294	356	406	445	461
K _V		9.08	50.7	116	189	254	308	351	385	399
F _d		0.44	0.60	0.72	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.80	0.76	0.72	0.70	0.68	0.69	0.69	0.69	0.69
X _T		0.511	0.551	0.459	0.406	0.391	0.397	0.410	0.416	0.429
C _V	8	25.4	136	266	413	554	686	818	895	897
K _V		22.0	118	230	357	479	593	708	774	776
F _d		0.43	0.59	0.72	0.80	0.87	0.92	0.96	0.99	1.00
F _L		0.75	0.77	0.75	0.72	0.73	0.69	0.70	0.70	0.72
X _T		0.731	0.439	0.483	0.469	0.439	0.397	0.360	0.375	0.426

Catalog 12

Level 4 Trim Reduced Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	2.14	3.70	4.65	5.25	5.50	5.57	5.66	5.66	5.66
K _V		1.84	3.18	4.00	4.52	4.73	4.79	4.87	4.87	4.87
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.64	0.75	0.75	0.79	0.75	0.74	0.73	0.73	0.73
X _T		0.286	0.388	0.464	0.483	0.471	0.459	0.444	0.444	0.444
C _V	1-1/2	2.10	4.55	6.16	8.00	10.4	11.3	11.3	11.3	11.3
K _V		1.81	3.91	5.30	6.88	8.94	9.72	9.72	9.72	9.72
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.82	0.79	≥0.79	0.79	0.79	0.72	0.72	0.72	0.72
X _T		0.469	0.397	0.454	0.500	0.502	0.482	0.482	0.482	0.482
C _V	2	2.75	5.15	6.70	9.65	13.7	16.8	18.8	18.8	17.9
K _V		2.37	4.43	5.76	8.30	11.8	14.5	16.2	16.2	15.4
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.75	0.76	0.83	≥0.86	0.87	0.85	0.77	0.77	0.81
X _T		0.467	0.448	0.519	0.624	0.612	0.543	0.444	0.439	0.484
C _V	3	4.12	9.50	13.1	19.8	29.6	39.0	45.3	48.0	48.0
K _V		3.56	8.22	11.3	17.1	25.6	33.7	39.2	41.5	41.5
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.80	0.80	0.88	0.86	0.84	0.82	0.81	0.79	0.77
X _T		0.469	0.551	0.605	0.522	0.518	0.551	0.515	0.466	0.466
C _V	4	2.26	11.2	20.1	33.3	50.8	69.1	83.0	89.3	90.1
K _V		1.95	9.69	17.4	28.8	43.9	59.8	71.8	77.2	77.9
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.96	0.95	0.85	0.86	0.86	0.83	0.80	0.77	0.74
X _T		0.779	0.779	0.632	0.620	0.612	0.589	0.537	0.466	0.452
C _V	6	13.6	37.9	49.8	82.9	122	159	184	194	196
K _V		11.8	32.8	43.1	71.7	106	138	159	168	170
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.97	0.69	0.72	0.74	0.77	0.81	0.81	0.77	0.77
X _T		0.518	0.280	0.381	0.357	0.397	0.452	0.476	0.452	0.442
C _V	8	19.7	63.6	134	228	334	438	526	587	605
K _V		17.0	55.0	116	197	289	379	455	508	523
F _d ⁽²⁾		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.93	0.83	0.76	0.77	0.77	0.77	0.75	0.75	0.72
X _T		0.597	0.473	0.422	0.394	0.378	0.381	0.400	0.429	0.436

1. Measured at 60% Port.
2. Measured at 40% Port.

Design V500

Reverse Flow

Level 4 Trim Reduced Port

Coefficients	Valve Size, Inch	Valve Rotation, Degrees							Modified Linear Characteristic	
		10	20	30	40	50	60	70	80	90
C _V	1	1.90	3.80	4.85	5.82	5.90	5.90	5.90	5.90	5.90
K _V		1.63	3.27	4.17	5.01	5.07	5.07	5.07	5.07	5.07
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.56	0.67	0.68	0.69	0.73	0.75	0.75	0.75	0.75
X _T		0.312	0.386	0.427	0.409	0.448	0.448	0.448	0.448	0.448
C _V	1-1/2	1.95	4.45	5.75	7.75	11.4	11.8	11.8	11.8	11.8
K _V		1.68	3.83	4.95	6.67	9.80	10.2	10.2	10.2	10.2
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.83	0.77	0.78	0.76	0.68	0.72	0.73	0.73	0.73
X _T		0.395	0.415	0.527	0.519	0.421	0.459	0.459	0.459	0.459
C _V	2	2.70	4.65	6.30	11.1	18.3	19.8	20.2	20.4	21.0
K _V		2.32	4.00	5.42	9.55	15.7	17.0	17.4	17.5	18.1
F _d ⁽¹⁾		0.54	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.91	0.89	0.84	0.71	0.58	0.61	0.62	0.62	0.60
X _T		0.459	0.464	0.594	0.453	0.307	0.358	0.366	0.337	0.328
C _V	3	4.41	9.60	13.7	19.5	37.3	53.3	56.7	57.9	57.9
K _V		3.81	8.30	11.9	16.9	32.3	46.1	49.0	50.1	50.1
F _d ⁽¹⁾		0.53	0.66	0.75	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.96	0.93	0.93	0.87	0.73	0.64	0.62	0.62	0.63
X _T		0.469	0.578	0.578	0.537	0.319	0.258	0.265	0.268	0.268
C _V	4	9.78	11.1	19.4	32.1	49.7	67.8	80.5	84.6	86.6
K _V		8.46	9.60	16.8	27.8	43.0	58.6	69.6	73.2	74.9
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.93	0.93	0.89	0.84	0.79	0.72	0.64	0.65	0.65
X _T		0.620	0.620	0.593	0.605	0.570	0.522	0.476	0.459	0.436
C _V	6	10.6	30.0	43.4	77.1	122	168	198	223	226
K _V		9.17	26.0	37.5	66.7	106	145	171	193	195
F _d ⁽¹⁾		0.52	0.65	0.74	0.82	0.88	0.92	0.96	0.99	1.00
F _L		0.77	0.79	0.77	0.75	0.69	0.64	0.63	0.58	0.58
X _T		0.640	0.369	0.476	0.410	0.381	0.357	0.336	0.284	0.278
C _V	8	19.8	55.8	125	222	323	413	488	549	569
K _V		17.1	48.3	108	192	279	357	422	475	492
F _d ⁽²⁾		0.48	0.63	0.73	0.81	0.87	0.92	0.96	0.99	1.00
F _L		0.75	0.77	0.78	0.75	0.70	0.68	0.70	0.68	0.70
X _T		0.459	0.581	0.462	0.394	0.375	0.381	0.391	0.391	0.391
1. Measured at 60% Port. 2. Measured at 40% Port.										

Catalog 12

August 1999
Page V500-8

Printed in U.S.A. on recycled paper.
©Fisher Controls International, Inc., 1988, 1999;
All Rights Reserved

Catalog 12

April 2010 - Page YD-1

Converging Flow

Converging Flow																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽²⁾
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90	100 (Plug Up)	
1/2	33.3	1.3125	19	0.75	R to B	C _V	8.37	7.10	6.68	5.94	4.97	4.03	3.10	2.15	1.49	1.30	0	0.81
						K _V	7.24	6.14	5.78	5.14	4.30	3.49	2.68	1.86	1.29	1.12	0.00	---
						X _T	0.562	0.452	0.432	0.442	0.456	0.473	0.494	0.504	0.529	0.574	---	---
					L to B	C _V	0	2.45	3.36	4.32	5.15	5.96	6.93	7.74	8.00	8.10	9.00	0.79
						K _V	0.00	2.12	2.91	3.74	4.45	5.16	5.99	6.70	6.92	7.01	7.79	---
						X _T	---	0.522	0.476	0.452	0.449	0.456	0.446	0.442	0.473	0.487	0.494	---
3/4	33.3	1.3125	19	0.75	R to B	C _V	12.3	10.7	10.1	8.94	7.42	5.83	4.24	2.77	1.85	1.59	0	0.77
						K _V	10.6	9.26	8.74	7.73	6.42	5.04	3.67	2.40	1.60	1.38	0.00	---
						X _T	0.494	0.466	0.446	0.442	0.446	0.452	0.469	0.490	0.551	0.616	---	---
					L to B	C _V	0	2.93	4.19	5.57	7.11	8.68	9.91	10.6	11.2	11.4	12.5	0.76
						K _V	0.00	2.53	3.62	4.82	6.15	7.51	8.57	9.17	9.69	9.86	10.8	---
						X _T	---	0.466	0.432	0.429	0.422	0.413	0.429	0.466	0.459	0.459	0.483	---
1	33.3	1.3125	19	0.75	R to B	C _V	19.4	17.1	15.3	12.6	9.70	6.82	4.34	2.48	1.46	1.14	0	0.91
						K _V	16.8	14.8	13.2	10.9	8.39	5.90	3.75	2.15	1.26	0.99	0.00	---
						X _T	0.655	0.656	0.681	0.714	0.745	0.768	0.717	0.682	0.751	0.848	---	---
					L to B	C _V	0	3.08	4.58	6.62	9.20	12.0	15.0	17.1	18.0	18.7	19.4	0.96
						K _V	0.00	2.66	3.96	5.73	7.96	10.4	13.0	14.8	15.6	16.2	16.8	---
						X _T	---	0.572	0.609	0.623	0.627	0.614	0.629	0.642	0.681	0.687	0.717	---
1-1/2	33.3	1.3125	19	0.75	R to B	C _V	22.2	19.7	17.6	14.5	11.1	7.82	5.97	2.85	1.68	1.30	0	0.87
						K _V	19.2	17.0	15.2	12.5	9.60	6.76	5.16	2.47	1.45	1.12	0.00	---
						X _T	0.552	0.545	0.566	0.621	0.629	0.644	0.590	0.569	0.624	0.719	---	---
					L to B	C _V	0	3.54	5.28	7.61	10.6	13.8	17.2	19.6	20.7	21.5	22.3	0.94
						K _V	0.00	3.06	4.57	6.58	9.17	11.9	14.9	17.0	17.9	18.6	19.3	---
						X _T	---	0.479	0.504	0.522	0.521	0.507	0.528	0.538	0.568	0.574	0.598	---
2	58.7	2.3125	29	1.125	R to B	C _V	74.2	69.8	64.6	57.3	46.7	35.3	24.8	15.8	9.03	5.05	0	0.81
						K _V	64.2	60.4	55.9	49.6	40.4	30.5	21.5	13.7	7.81	4.37	0.00	---
						X _T	0.670	0.655	0.660	0.659	0.697	0.759	0.778	0.794	0.761	0.742	---	---
					L to B	C _V	0	4.90	7.80	12.8	19.7	28.1	38.4	49.3	58.4	64.9	71.9	0.93
						K _V	0.00	4.24	6.75	11.1	17.0	24.3	33.2	42.6	50.5	56.1	62.2	---
						X _T	---	0.743	0.694	0.686	0.712	0.748	0.750	0.752	0.748	0.731	0.744	---
2-1/2	58.7	2.3125	29	1.125	R to B	C _V	81.6	78.8	70.0	62.9	51.7	38.5	27.5	17.6	9.9	5.5	0	0.79
						K _V	70.6	68.2	60.5	54.4	44.7	33.3	23.8	15.2	8.56	4.76	0.00	---
						X _T	0.610	0.565	0.623	0.601	0.629	0.702	0.698	0.707	0.699	0.692	---	---
					L to B	C _V	0	5.4	8.58	14.3	21.9	30.8	41.8	53.9	63.8	71.5	79.2	0.91
						K _V	0.00	4.67	7.42	12.4	18.9	26.6	36.2	46.6	55.2	61.8	68.5	---
						X _T	---	0.671	0.633	0.605	0.635	0.685	0.697	0.697	0.690	0.664	0.674	---

Converging Flow																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾	
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90		100 (Plug Up)
3	87.3	3.4375	38	1.5	R to B	C _V	143	133	121	107	91.1	73.7	56.6	39.0	20.9	8.64	0	0.74
						K _V	124	115	105	93	78.8	63.8	49.0	33.7	18.1	7.47	0.00	---
						X _T	0.594	0.632	0.680	0.696	0.714	0.754	0.734	0.673	0.711	0.873	---	---
					L to B	C _V	0	18.7	33.9	51.7	70.1	87.9	101	120	134	146	156	0.92
						K _V	0.00	16.2	29.3	44.7	60.6	76.0	87.4	104	116	126	135	---
						X _T	---	0.848	0.757	0.692	0.644	0.621	0.643	0.670	0.743	0.744	0.730	---
4	111.1	4.375	51	2	R to B	C _V	248	236	222	200	175	147	117	86.9	56.6	29.0	0	0.74
						K _V	215	204	192	173	151	127	101	75.2	49.0	25.1	0.00	---
						X _T	0.570	0.583	0.616	0.652	0.672	0.669	0.659	0.608	0.618	0.640	---	---
					L to B	C _V	0	10.2	26.5	49.7	78.4	113	154	189	216	241	265	0.92
						K _V	0.00	8.82	22.9	43.0	67.8	97.7	133	163	187	208	229	---
						X _T	---	0.658	0.622	0.616	0.625	0.631	0.643	0.683	0.704	0.711	0.752	---
6	177.8	7	51	2	R to B	C _V	451	424	387	338	282	223	162	108	60.1	22.9	0	0.84
						K _V	390	367	335	292	244	193	140	93.4	52.0	19.8	0.00	---
						X _T	0.757	0.721	0.727	0.749	0.750	0.747	0.776	0.770	0.749	0.774	---	---
					L to B	C _V	0	49.4	102	161	221	284	337	387	433	474	506	0.91
						K _V	0.00	42.7	88.2	139	191	246	292	335	375	410	438	---
						X _T	---	0.592	0.623	0.662	0.695	0.688	0.728	0.749	0.740	0.757	0.773	---
8 High Capacity	177.8	7	57.2	2.25	R to B	C _V	491	473	425	384	332	256	171	102	55	24	0	0.84
						K _V	425	409	368	332	287	221	148	88.2	47.6	20.8	0.00	---
						X _T	0.702	0.669	0.662	0.689	0.609	0.653	0.710	0.613	0.558	0.349	0	---
					L to B	C _V	0	10	34	62	103	170	264	361	446	527	588	0.91
						K _V	0.00	8.65	29.4	53.6	89.1	147	228	312	386	456	509	---
						X _T	0	0.731	0.891	0.838	0.861	0.900	0.850	0.712	0.654	0.629	0.735	---
8 Low Capacity	177.8	7	57.2	2.25	R to B	C _V	476	410	358	310	246	169	105	57.5	30.1	11.0	0	0.84
						K _V	412	355	310	268	213	146	91	49.7	26.0	9.52	0	---
						X _T	0.668	0.669	0.668	0.668	0.668	0.668	0.669	0.669	0.669	0.666	0	---
					L to B	C _V	0	12	25	47.9	88.1	144	213	283	376	461	542	0.91
						K _V	0	10.4	21.6	41.4	76.2	125	184	245	325	399	469	---
						X _T	0	0.655	0.603	0.607	0.608	0.608	0.608	0.608	0.608	0.608	0.608	---
1. The end connections are identified on the valve body. 2. At maximum flow.																		

Catalog 12

April 2010 - Page YD-3

Diverging Flow

Diverging Flow																		Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽²⁾
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90	100 (Plug Up)	
1/2	33.3	1.3125	19	0.75	B to R	C _V	9.25	8.47	8.19	7.74	6.97	5.92	4.54	3.08	2.19	2.02	0	0.80
						K _V	8.00	7.33	7.08	6.70	6.03	5.12	3.93	2.66	1.89	1.75	0.00	---
						X _T	0.518	0.473	422	0.410	0.439	0.515	0.620	0.714	0.689	0.727	---	---
					B to L	C _V	0	2.08	2.80	3.51	4.26	5.11	6.02	6.90	7.50	7.72	8.67	0.80
						K _V	0.00	1.80	2.42	3.04	3.68	4.42	5.21	5.97	6.49	6.68	7.50	---
						X _T	---	---	0.898	0.744	0.628	0.540	0.533	0.578	0.574	0.555	0.563	---
3/4	33.3	1.3125	19	0.75	B to R	C _V	13.0	12.1	11.5	10.5	9.17	7.48	5.49	3.57	2.49	2.34	0	0.77
						K _V	11.2	10.5	9.95	9.08	7.93	6.47	4.75	3.09	2.15	2.02	0.00	---
						X _T	0.537	0.537	0.522	0.529	0.574	0.628	0.648	0.636	0.620	0.648	---	---
					B to L	C _V	0	2.39	3.40	4.46	5.70	6.96	8.21	9.39	10.1	10.3	11.5	0.79
						K _V	0.00	2.07	2.94	3.86	4.93	6.02	7.10	8.12	8.74	8.91	9.95	---
						X _T	---	---	0.946	0.884	0.783	0.681	0.648	0.660	0.668	0.648	0.640	0.608
1	33.3	1.3125	19	0.75	B to R	C _V	19.4	18.1	16.3	14.5	12.5	9.68	6.58	4.04	2.73	2.40	0	0.89
						K _V	16.8	15.7	14.1	12.5	10.8	8.37	5.69	3.49	2.36	2.08	0.00	---
						X _T	0.632	0.666	0.694	0.674	0.614	0.616	0.549	0.455	0.537	0.515	---	---
					B to L	C _V	0	4.16	6.18	8.34	10.9	13.3	15.2	16.7	18.0	18.9	19.2	0.87
						K _V	0.00	3.60	5.35	7.21	9.43	11.5	13.1	14.4	15.6	16.3	16.6	---
						X _T	---	0.718	0.749	0.787	0.756	0.738	0.712	0.693	0.656	0.640	0.648	---
1-1/2	33.3	1.3125	19	0.75	B to R	C _V	23	20.9	18.9	16.8	13.3	9.90	6.90	4.36	2.53	2.06	0	0.89
						K _V	19.9	18.1	16.3	14.5	11.5	8.56	5.97	3.77	2.19	1.78	0.00	---
						X _T	0.604	0.604	0.599	0.599	0.565	0.559	0.525	0.522	0.492	0.487	---	---
					B to L	C _V	0	4.20	6.30	8.40	11.1	13.5	15.5	17.5	19.6	21.4	23	0.84
						K _V	0.00	3.63	5.45	7.27	9.60	11.7	13.4	15.1	17.0	18.5	19.9	---
						X _T	---	0.684	0.694	0.719	0.732	0.726	0.725	0.674	0.677	0.634	0.596	---
2	58.7	2.3125	29	1.125	B to R	C _V	74.2	73.1	69.7	64.2	55.0	44.5	32.6	21.0	12.7	8.77	0	0.90
						K _V	64.2	63.2	60.3	55.5	47.6	38.5	28.2	18.2	11.0	7.59	0.00	---
						X _T	0.750	0.756	0.760	0.754	0.762	0.739	0.712	0.734	0.680	0.651	---	---
					B to L	C _V	0	6.40	9.32	15.0	28.8	34.3	46.9	59.0	69.8	79.3	85.5	0.87
						K _V	0.00	5.54	8.06	13.0	24.9	29.7	40.6	51.0	60.4	68.6	74.0	---
						X _T	---	0.660	0.674	0.624	0.577	0.631	0.639	0.662	0.673	0.636	0.628	---
2-1/2	58.7	2.3125	29	1.125	B to R	C _V	77.9	76.7	73.2	67.4	57.7	46.7	34.4	22.1	13.3	9.21	0	0.89
						K _V	67.4	66.3	63.3	58.3	49.9	40.4	29.8	19.1	11.5	7.97	0.00	---
						X _T	0.723	0.729	0.735	0.734	0.743	0.715	0.680	0.710	0.659	0.628	---	---
					B to L	C _V	0	6.72	9.79	15.8	25.0	36.0	49.2	62.0	73.3	83.3	89.7	0.87
						K _V	0.00	5.81	8.47	13.7	21.6	31.1	42.6	53.6	63.4	72.1	77.6	---
						X _T	---	0.640	0.647	0.601	0.558	0.616	0.620	0.644	0.653	0.623	0.609	---



Diverging Flow																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾	
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90		100 (Plug Up)
3	87.3	3.4375	38	1.5	B to R	C _V	146	146	146	143	128	106	81.1	55.0	29.8	16.4	0	0.87
						K _V	126	126	126	124	111	91.7	70.2	47.6	25.8	14.2	0.00	---
						X _T	0.687	0.716	0.733	0.687	0.686	0.689	0.688	0.684	0.684	0.688	---	---
					B to L	C _V	0	26.9	44.3	64.5	84.0	103	122	140	153	165	174	0.90
						K _V	0.00	23.3	38.3	55.8	72.7	89.1	106	121	132	143	151	---
						X _T	---	0.673	0.679	0.675	0.674	0.673	0.672	0.672	0.676	0.674	0.671	---
4	111.1	4.375	51	2	B to R	C _V	252	249	246	241	227	203	172	135	94.6	52.1	0	0.76
						K _V	218	215	213	208	196	176	149	117	81.8	45.1	0.00	---
						X _T	0.670	0.671	0.674	0.672	0.673	0.673	0.674	0.643	0.671	0.673	---	---
					B to L	C _V	0	12.0	28.0	50.2	79.7	119	172	226	267	297	316	0.91
						K _V	0.00	10.4	24.2	43.4	68.9	103	149	195	231	257	273	---
						X _T	---	0.691	0.689	0.692	0.691	0.692	0.691	0.688	0.687	0.887	0.690	---
6	177.8	7	51	2	B to R	C _V	483	470	444	395	343	273	203	134	74.8	33.0	0	0.89
						K _V	418	407	384	342	297	236	176	116	64.7	28.5	0.00	---
						X _T	0.783	0.780	0.781	0.785	0.791	0.781	0.786	0.785	0.784	0.786	---	---
					B to L	C _V	0	58.4	106	164	230	301	374	437	491	534	567	0.89
						K _V	0.00	50.5	91.7	142	199	260	324	378	425	462	490	---
						X _T	---	0.726	0.729	0.729	0.728	0.732	0.732	0.727	0.732	0.726	0.732	---
8 High Capacity	177.8	7	57.5	2.25	B to R	C _V	546	525	472	427	369	284	190	114	61	26	0	0.89
						K _V	472	454	408	369	319	246	164	98.6	52.8	22.5	0.00	---
						X _T	0.700	0.670	0.734	0.688	0.609	0.655	0.710	0.606	0.559	0.367	0	---
					B to L	C _V	0	12	37	68	114	189	293	401	495	586	653	0.89
						K _V	0.00	10.4	32.0	58.8	98.6	163	253	347	428	507	565	---
						X _T	0	0.628	0.929	0.860	0.858	0.899	0.824	0.712	0.655	0.625	0.735	---
8 Low Capacity	177.8	7	57.5	2.25	B to R	C _V	529	456	398	341	273	188	117	63.9	33.5	12.2	0	0.89
						K _V	458	394	344	295	236	163	101	55.3	29.0	10.6	0	---
						X _T	0.660	0.667	0.668	0.668	0.668	0.668	0.668	0.668	0.667	0.661	0	---
					B to L	C _V	0	14	28	53.2	97.9	160	236	315	418	512	602	0.89
						K _V	0	12.1	24.2	46.0	84.7	138	204	272	362	443	521	---
						X _T	0	0.594	0.594	0.608	0.608	0.608	0.608	0.608	0.608	0.608	0.608	---
1. The end connections are identified on the valve body. 2. At maximum flow.																		

Catalog 12

April 2010 - Page YS-1

Converging Flow

Converging Flow																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾	
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90		100 (Plug Up)
1/2	33.3	1.3125	19	0.75	R to L	C _V	8.43	7.37	6.62	6.11	5.66	5.20	4.73	4.25	3.65	2.48	0	0.80
						K _V	7.29	6.38	5.73	5.29	4.90	4.50	4.09	3.68	3.16	2.15	0.00	---
						X _T	0.518	0.473	0.446	0.422	0.416	0.429	0.442	0.449	0.459	0.501	---	---
					B to L	C _V	0	1.74	2.44	3.16	3.61	4.10	4.95	5.85	6.38	7.07	8.42	0.80
						K _V	0.00	1.51	2.11	2.73	3.12	3.55	4.28	5.06	5.52	6.12	7.28	---
						X _T	---	0.936	0.819	0.744	0.761	0.697	0.559	0.469	0.456	0.490	0.526	---
3/4	33.3	1.3125	19	0.75	R to L	C _V	11.8	10.4	9.37	8.71	8.07	7.25	6.27	5.32	4.40	2.78	0	0.79
						K _V	10.2	9.00	8.11	7.53	6.98	6.27	5.42	4.60	3.81	2.40	0.00	---
						X _T	0.508	0.508	0.490	0.462	0.452	0.452	0.459	0.459	0.436	0.452	---	---
					B to L	C _V	0	2.65	3.72	4.87	6.30	7.43	8.29	9.16	9.97	11.2	12.5	0.77
						K _V	0.00	2.29	3.22	4.21	5.45	6.43	7.17	7.92	8.62	9.69	10.8	---
						X _T	---	0.533	0.508	0.494	0.446	0.397	0.397	0.436	0.446	0.432	0.497	---
1	33.3	1.3125	19	0.75	R to L	C _V	18.4	16.5	15.3	13.8	12.0	9.84	7.63	5.37	3.38	1.64	0	0.93
						K _V	15.9	14.3	13.2	11.9	10.4	8.51	6.60	4.65	2.92	1.42	0.00	---
						X _T	0.682	0.664	0.665	0.668	0.674	0.694	0.704	0.702	0.736	0.845	---	---
					B to L	C _V	0	2.11	3.03	4.45	6.15	8.18	10.5	13.0	15.7	18.3	20.5	0.88
						K _V	0.00	1.83	2.62	3.85	5.32	7.08	9.08	11.2	13.6	15.8	17.7	---
						X _T	---	0.602	0.722	0.691	0.674	0.646	0.644	0.646	0.626	0.594	0.613	---
1-1/2	33.3	1.3125	19	0.75	R to L	C _V	20.6	18.0	16.2	14.3	12.4	9.90	7.70	5.42	3.30	1.65	0	0.91
						K _V	17.8	15.6	14.0	12.4	10.7	8.56	6.66	4.69	2.85	1.43	0.00	---
						X _T	0.603	0.616	0.656	0.690	0.700	0.759	0.763	0.768	0.854	0.926	---	---
					B to L	C _V	0	2.60	4.90	6.90	9.40	12.6	15.4	18.8	22.0	24.5	25.1	0.82
						K _V	0.00	2.25	4.24	5.97	8.13	10.9	13.3	16.3	19.0	21.2	21.7	---
						X _T	---	0.453	0.315	0.328	0.330	0.313	0.342	0.353	0.365	0.379	0.468	---
2	58.7	2.3125	29	1.125	R to L	C _V	66.1	63.6	61.9	59.3	53.7	47.0	37.7	27.6	17.1	6.68	0	0.92
						K _V	57.2	55.0	53.5	51.3	46.5	40.7	32.6	23.9	14.8	5.78	0.00	---
						X _T	0.757	0.762	0.747	0.725	0.734	0.743	0.743	0.733	0.724	0.848	---	---
					B to L	C _V	0	3.85	5.48	9.16	14.6	21.5	30.7	42.4	56.3	71.9	85.6	0.65
						K _V	0.00	3.33	4.74	7.92	12.6	18.6	26.6	36.7	48.7	62.2	74.0	---
						X _T	---	0.911	0.883	0.801	0.772	0.756	0.745	0.731	0.697	0.656	0.608	---



Converging Flow																	Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽²⁾	
	mm	Inches	mm	Inches			0 (Plug Down)	10	20	30	40	50	60	70	80	90		100 (Plug Up)
2-1/2	58.7	2.3125	29	1.125	R to L	C _V	72.8	70.0	68.0	65.3	59.2	51.7	41.5	30.3	18.8	7.35	0	0.89
						K _V	63.0	60.5	58.8	56.5	51.2	44.7	35.9	26.2	16.3	6.36	0.00	---
						X _T	0.691	0.677	0.684	0.659	0.664	0.676	0.681	0.667	0.662	0.662	---	---
					B to L	C _V	0	4.24	6.03	10.1	16.0	23.7	33.8	46.7	62.0	79.0	94.2	0.84
						K _V	0.00	3.67	5.22	8.74	13.8	20.5	29.2	40.4	53.6	68.3	81.5	---
						X _T	---	0.824	0.802	0.725	0.694	0.684	0.674	0.662	0.631	0.601	0.552	---
3	87.3	3.4375	38	1.5	R to L	C _V	140	131	121	111	99.3	85.3	68.3	46.1	23.9	9.07	0	0.86
						K _V	121	113	105	96.0	85.9	73.8	59.1	39.9	20.7	7.85	0.00	---
						X _T	0.713	0.714	0.714	0.713	0.716	0.712	0.715	0.716	0.713	0.711	---	---
					B to L	C _V	0	14.1	27.4	40.3	53.8	68.3	87.1	111	138	164	185	0.83
						K _V	0.00	12.2	23.7	34.9	46.5	59.1	75.3	96.0	119	142	160	---
						X _T	---	0.519	0.592	0.592	0.595	0.591	0.592	0.593	0.593	0.593	0.593	---
4	111.1	4.375	51	2	R to L	C _V	234	231	225	216	200	175	140	103	65.2	30.0	0	0.87
						K _V	202	200	195	187	173	151	121	89.1	56.4	25.9	0.00	---
						X _T	0.727	0.698	0.702	0.685	0.672	0.670	0.692	0.657	0.548	0.583	---	---
					B to L	C _V	0	2.81	11.9	25.0	43.1	69.0	106	149	200	256	312	0.84
						K _V	0.00	2.43	10.3	21.6	37.3	59.7	91.7	129	173	221	270	---
						X _T	---	0.754	0.866	0.805	0.747	0.725	0.729	0.715	0.695	0.659	0.590	---
6	177.8	7	51	2	R to L	C _V	413	386	363	331	296	252	207	157	102	49.5	0	0.87
						K _V	357	334	314	286	256	218	179	136	88	42.8	0.00	---
						X _T	0.770	0.764	0.729	0.716	0.699	0.665	0.607	0.537	0.488	0.465	---	---
					B to L	C _V	0	38.4	70.1	110	156	208	262	324	393	473	556	0.84
						K _V	0.00	33.2	60.6	95.2	135	180	227	280	340	409	481	---
						X _T	---	0.750	0.789	0.770	0.738	0.720	0.708	0.707	0.694	0.654	0.605	---
1. The end connections are identified on the valve body. 2. At maximum flow.																		

Catalog 12

April 2010 - Page YS-3

Diverging Flow

Diverging Flow									On-Off Service Only
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel		F _L ⁽²⁾
	mm	Inches	mm	Inches			0 (Plug Down)	100 (Plug Up)	
1/2	33.3	1.3125	19	0.75	L to R	C _V	8.20	0	0.84
						K _V	7.09	0.00	---
						X _T	0.612	---	---
					L to B	C _V	0	8.89	0.82
						K _V	0.00	7.69	---
						X _T	---	0.544	---
3/4	33.3	1.3125	19	0.75	L to R	C _V	11.0	0	0.84
						K _V	9.52	0.00	---
						X _T	0.616	---	---
					L to B	C _V	0	11.8	0.81
						K _V	0.00	10.2	---
						X _T	---	0.597	---
1	33.3	1.3125	19	0.75	L to R	C _V	17.1	0	0.94
						K _V	14.8	0.00	---
						X _T	0.742	---	---
					L to B	C _V	0	19.3	0.89
						K _V	0.00	16.7	---
						X _T	---	0.696	---
1-1/2	33.3	1.3125	19	0.75	L to R	C _V	20.5	0	0.89
						K _V	17.7	0.00	---
						X _T	0.590	---	---
					L to B	C _V	0	23.2	0.85
						K _V	0.00	20.1	---
						X _T	---	0.550	---
2	58.7	2.3125	29	1.125	L to R	C _V	58.1	0	0.94
						K _V	50.3	0.00	---
						X _T	0.848	---	---
					L to B	C _V	0	72.7	0.93
						K _V	0.00	62.9	---
						X _T	---	0.757	---
2-1/2	58.7	2.3125	29	1.125	L to R	C _V	64.0	0	0.92
						K _V	55.4	0.00	---
						X _T	0.772	---	---
					L to B	C _V	0	80.0	0.91
						K _V	0.00	69.2	---
						X _T	---	0.691	---



Diverging Flow									On-Off Service Only
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Path ⁽¹⁾	Flow Coeffi- cient	Valve Opening—Percent of Total Travel		F _L ⁽²⁾
	mm	Inches	mm	Inches			0 (Plug Down)	100 (Plug Up)	
3	87.3	3.4375	38	1.5	L to R	C _V	118	0	0.93
						K _V	102	0.00	---
						X _T	0.830	---	---
					L to B	C _V	0	148	0.95
						K _V	0.00	128	---
						X _T	---	0.766	---
4	111.1	4.375	51	2	L to R	C _V	203	0	0.92
						K _V	176	0.00	---
						X _T	0.819	---	---
					L to B	C _V	0	265	0.94
						K _V	0.00	229	---
						X _T	---	0.757	---
6	177.8	7	51	2	L to R	C _V	386	0	0.94
						K _V	334	0.00	---
						X _T	0.849	---	---
					L to B	C _V	0	512	0.94
						K _V	0.00	443	---
						X _T	---	0.772	---
1. The end connections are identified on the valve body. 2. At maximum flow.									